

**Greg Daynes**  
**z/OS Installation and Deployment Architect**  
**IBM Corporation**

---



# Enterprise2014

## Session zIN024 What's New in z/OSMF V2.1



© Copyright IBM Corporation 2014

Technical University/Symposia materials may not be reproduced  
in whole or in part without the prior written permission of IBM.





**The following are trademarks of the International Business Machines Corporation in the United States and/or other countries.**

IBM*	ServerPac*	* Registered trademarks of IBM Corporation
IBM (logo)	WebSphere*	
RACF*	z/OS*	

**The following are trademarks or registered trademarks of other companies.**

Adobe, the Adobe logo, PostScript, and the PostScript logo are either registered trademarks or trademarks of Adobe Systems Incorporated in the United States, and/or other countries.

Firefox is a trademark of Mozilla Foundation

Cell Broadband Engine is a trademark of Sony Computer Entertainment, Inc. in the United States, other countries, or both and is used under license there from.

Java and all Java-based trademarks are trademarks of Sun Microsystems, Inc. in the United States, other countries, or both.

Microsoft, Windows, Windows NT, and the Windows logo are trademarks of Microsoft Corporation in the United States, other countries, or both.

Internet Explorer is a trademark of Microsoft Corp

InfiniBand is a trademark and service mark of the InfiniBand Trade Association.

Intel, Intel logo, Intel Inside, Intel Inside logo, Intel Centrino, Intel Centrino logo, Celeron, Intel Xeon, Intel SpeedStep, Itanium, and Pentium are trademarks or registered trademarks of Intel Corporation or its subsidiaries in the United States and other countries.

UNIX is a registered trademark of The Open Group in the United States and other countries.

Linux is a registered trademark of Linus Torvalds in the United States, other countries, or both.

ITIL is a registered trademark, and a registered community trademark of the Office of Government Commerce, and is registered in the U.S. Patent and Trademark Office.

IT Infrastructure Library is a registered trademark of the Central Computer and Telecommunications Agency, which is now part of the Office of Government Commerce.

\* All other products may be trademarks or registered trademarks of their respective companies.

## Notes:

Performance is in Internal Throughput Rate (ITR) ratio based on measurements and projections using standard IBM benchmarks in a controlled environment. The actual throughput that any user will experience will vary depending upon considerations such as the amount of multiprogramming in the user's job stream, the I/O configuration, the storage configuration, and the workload processed. Therefore, no assurance can be given that an individual user will achieve throughput improvements equivalent to the performance ratios stated here.

IBM hardware products are manufactured from new parts, or new and serviceable used parts. Regardless, our warranty terms apply.

All customer examples cited or described in this presentation are presented as illustrations of the manner in which some customers have used IBM products and the results they may have achieved. Actual environmental costs and performance characteristics will vary depending on individual customer configurations and conditions.

This publication was produced in the United States. IBM may not offer the products, services or features discussed in this document in other countries, and the information may be subject to change without notice. Consult your local IBM business contact for information on the product or services available in your area.

All statements regarding IBM's future direction and intent are subject to change or withdrawal without notice, and represent goals and objectives only.

Information about non-IBM products is obtained from the manufacturers of those products or their published announcements. IBM has not tested those products and cannot confirm the performance, compatibility, or any other claims related to non-IBM products. Questions on the capabilities of non-IBM products should be addressed to the suppliers of those products.

Prices subject to change without notice. Contact your IBM representative or Business Partner for the most current pricing in your geography.

See url <http://www.ibm.com/legal/copytrade.shtml> for a list of IBM trademarks.





# Agenda


---

- **Overview of z/OS Simplification Efforts**
  - The z/OS Management Facility (z/OSMF)
- **What's New in z/OSMF V2.1**
  - Use of the WebSphere Application Server Liberty profile
  - Workflows
  - Support for External Applications
- **z/OSMF Management Tasks**
  - Configuration
  - Performance
  - Problem Determination
  - Software
  - z/OS Classic Interface: ISPF
- **Other z/OSMF Capabilities**
  - Security
  - Internet and Intranet Links
  - System
  - Programmatic Interface for z/OSMF





# Agenda



## Overview of z/OS Simplification Efforts

- The z/OS Management Facility (z/OSMF)

- What's New in z/OSMF V2.1

- Use of the WebSphere Application Server Liberty profile
- Workflows
- Support for External Applications

- z/OSMF Management Tasks

- Configuration
- Performance
- Problem Determination
- Software
- z/OS Classic Interface: ISPF


- Other z/OSMF Capabilities

- Security
- Internet and Intranet Links
- System
- Programmatic Interface for z/OSMF





# Focus Areas for Simplification

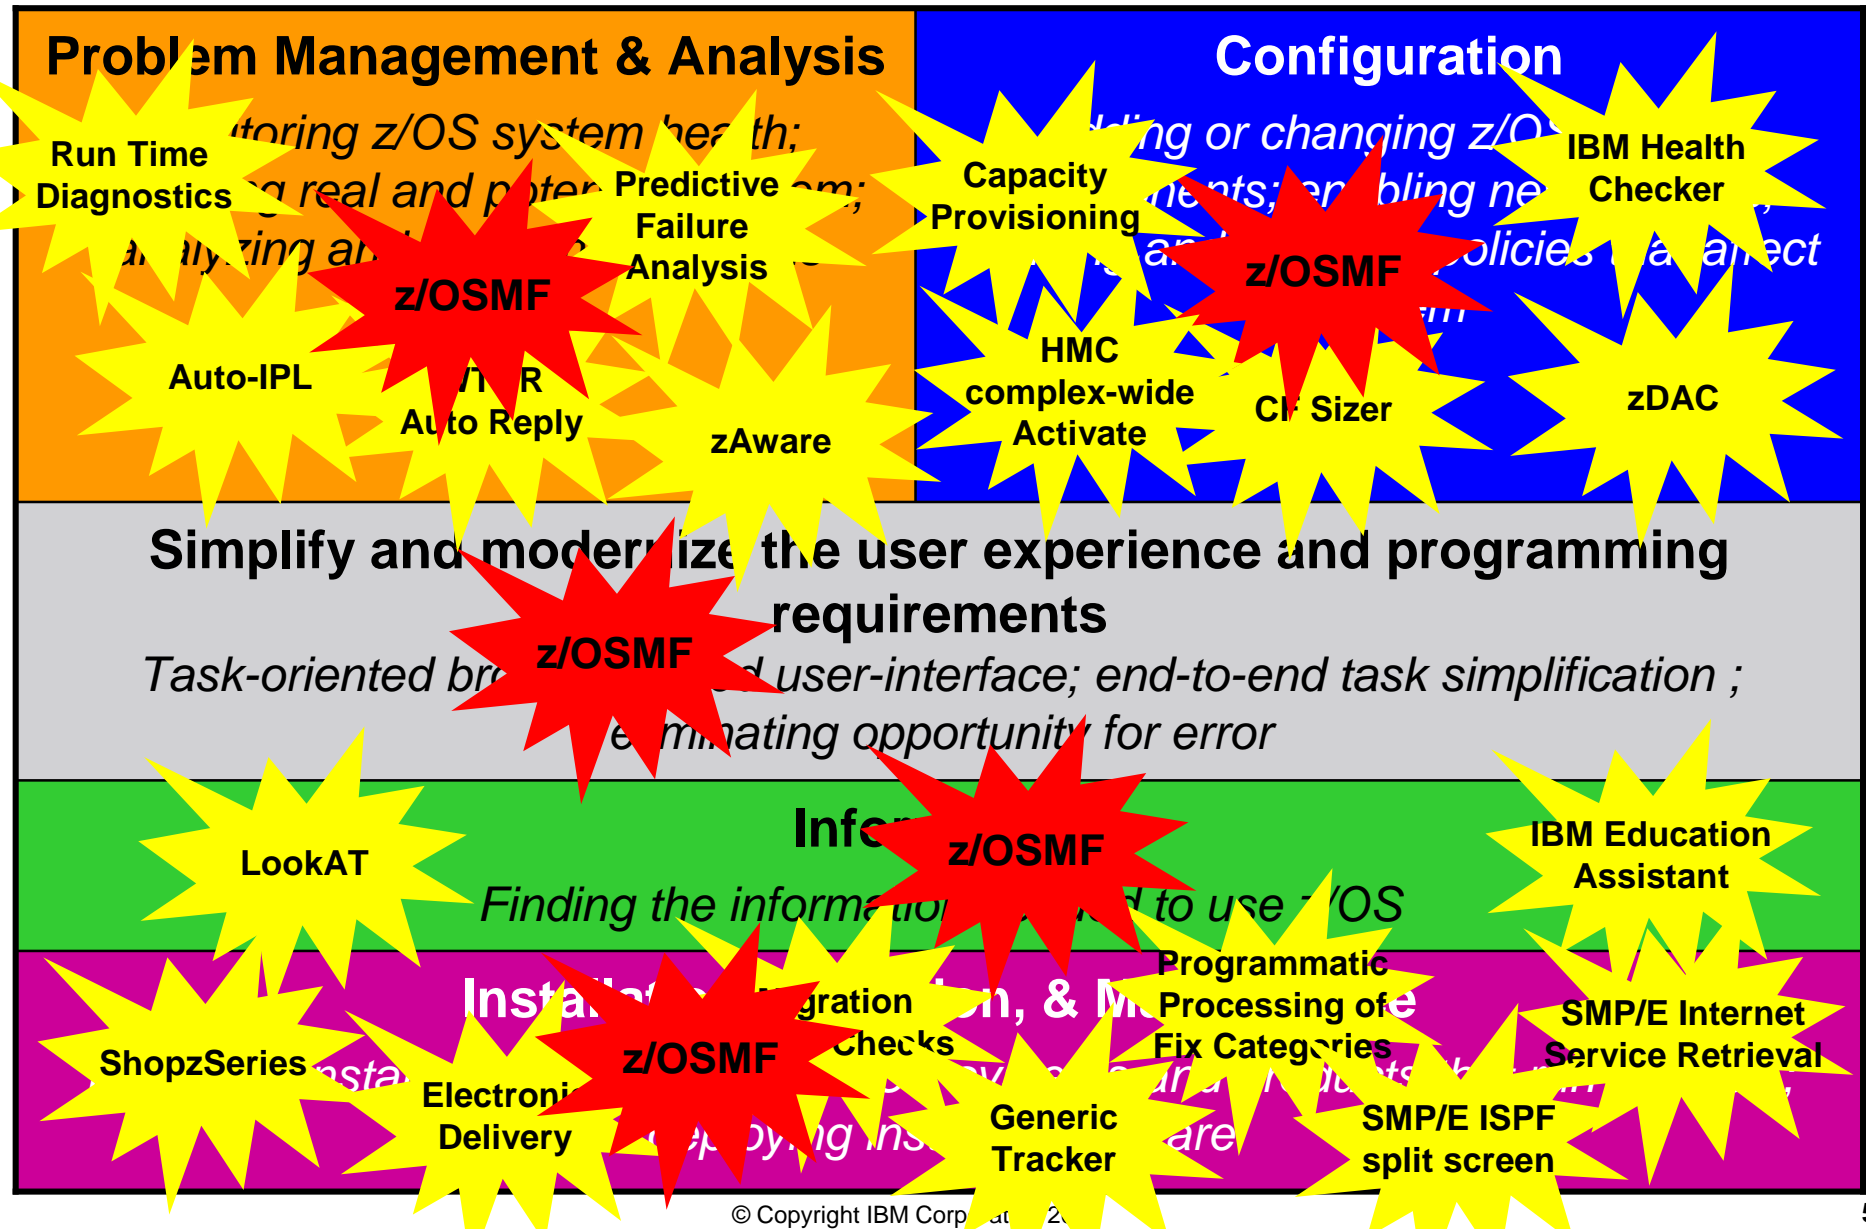






## What is z/OSMF?

- **IBM z/OS Management Facility (z/OSMF) delivers on IBM's strategy for mainframe simplification and modernization**
  - The IBM z/OS Management Facility is a separate product for z/OS that provides support for a modern, Web-browser based management console for z/OS.
  - It helps system programmers more easily manage and administer a mainframe system by simplifying day to day operations and administration of a z/OS system.
  - More than just a graphical user interface, the z/OS Management Facility is intelligent, addressing the needs of a diversified skilled workforce and maximizing their productivity.
    - Automated tasks can help reduce the learning curve and improve productivity.
    - Embedded active user assistance (such as wizards) guide you through tasks and helps provide simplified operations.
- **z/OSMF V2.1 has it's own product number 5610-A01 and must be separately ordered**
  - It can be ordered with z/OS in the same ServerPac
  - Can be ordered in a CBPDO (with or without other products)
    - Can also be ordered in a "Product" ServerPac
  - Service & Subscription program number is 5655-S29
    - This must be ordered for support

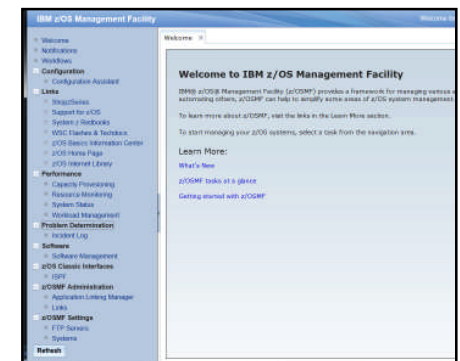





# z/OS Management Facility

## Problem Management & Analysis

## Installation, Migration, & Maintenance

## Configuration

Simplify and modernize the user experience and programming requirements

### Incident Log (z/OSMF V1.11)

provides a consolidated list of SVC Dump related problems, along with details and diagnostic data captured with each incident. It also facilitates sending the data for further diagnostics.

### SDSF (z/OSMF V2.1 with PTF

UI15294) provides a browser-based SDSF application designed to run in a z/OSMF environment that takes advantage of the richer display capabilities of a graphical user interface.

### z/OSMF Base Services:

- **Security integration with SAF (z/OSMF V1.13)**
- **ISPF Web UI (z/OSMF V1.13)**
- **REST API for Jobs (z/OSMF V1.13)**
- **REST API for Data Sets and Files (z/OSMF V2.1 with PTF UI16044)**
- **REST API for z/OSMF Information Retrieval (z/OSMF V2.1 with PTF UI91005)**
- **Notifications (z/OSMF V2.1)** View and act on the z/OSMF notifications that have been assigned to you
- **Workflow (z/OSMF V2.1)** Perform a guided set of steps, for example, to configure components or products in your installation. **With PTF UI90005**, A workflow step can use output from another workflow step; also a workflow step can be performed conditionally.
- The ability to add non-z/OSMF launch points and links to any category in the navigation tree allows a central tool for effective information and knowledge sharing.
- **Import Manager (z/OSMF V2.1 with PTF UI16044)** Import import plug-ins, event types, event handlers, and links into z/OSMF.
- **Systems Setting** - Discover the system definition that hosts the z/OSMF instance (z/OSMF V2.1 with PTF UI91005)

**Software Management (z/OSMF V1.13)** provides a simple, structured approach to deploying SMP/E installed software. In addition, it allows for inspection of a software instance to view the product, feature, FMID content, SYSMODS, as well as the physical datasets that comprise a particular software instance. It also enables you to perform actions to analyze and report on software instances (such as identifying installed products with an announced end of service date).

**Configuration Assistant for z/OS Communications Server (z/OSMF V1.11)** Simplified configuration and setup of TCP/IP policy-based networking functions

### WLM Policy Editor (z/OSMF V1.12)

Simplified management of WLM service definitions and policies. Facilitate the creation and editing of WLM service definitions, installation of WLM service definitions, and activation of WLM service policies

### Resource Monitoring (z/OSMF

V1.12) Provides dynamic real time metrics for system performance

### Capacity Provisioning (z/OSMF


V1.13) simplify the work of a z/OS CP administrator to manage connections to CPMs, view reports for domain status, active configuration and active policy.



# IBM z/OS Management Facility

## The Application Stack

Session zIN023 z/OSMF V2.1  
Configuration and Implementation

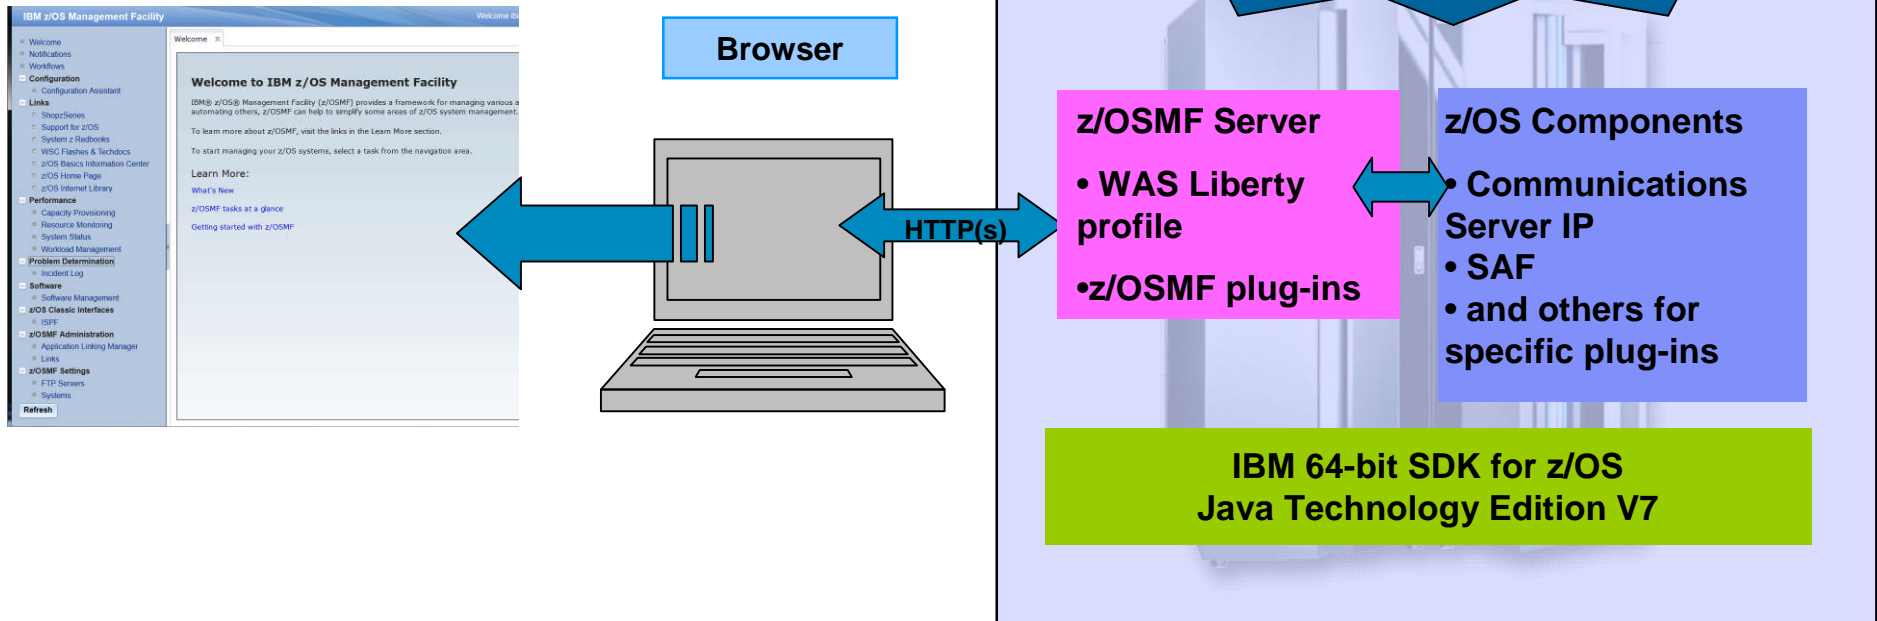

- The z/OS Management Facility applications run on the z/OS enabling you to manage z/OS from z/OS
  - Information is presented on a PC using a browser
- The z/OS Management Facility requires:
  - z/OS Communications Server
  - Security definitions (SAF)
  - Other components are required for specific z/OSMF plug-ins
  - IBM 64-bit SDK for z/OS Java Technology Edition V7 (or 7.1)





# Agenda

- Overview of z/OS Simplification Efforts
  - The z/OS Management Facility (z/OSMF)
- ➔ **What's New in z/OSMF V2.1**
  - Use of the WebSphere Application Server Liberty profile
  - Workflows
  - Support for External Applications
- z/OSMF Management Tasks
  - Configuration
  - Performance
  - Problem Determination
  - Software
  - z/OS Classic Interface: ISPF
- Other z/OSMF Capabilities
  - Security
  - Internet and Intranet Links
  - System
  - Programmatic Interface for z/OSMF



# IBM z/OS Management Facility

Enterprise2014



IBM

IBM z/OS Management Facility

Welcome ibmuser

- Welcome
- Notifications
- Workflows
- Configuration
  - Configuration Assistant
- Links
  - ShopzSeries
  - Support for z/OS
  - System z Redbooks
  - WSC Flashes & Techdocs
  - z/OS Basics Information Center
  - z/OS Home Page
  - z/OS Internet Library
- Performance
  - Capacity Provisioning
  - Resource Monitoring
  - System Status
  - Workload Management
- Problem Determination
  - Incident Log
- Software
  - Software Management
- z/OS Classic Interfaces
  - ISPF
- z/OSMF Administration
  - Application Linking Manager
  - Links
- z/OSMF Settings
  - FTP Servers
  - Systems

Refresh

Welcome x

## Welcome to IBM z/OS Management Facility

IBM® z/OS® Management Facility (z/OSMF) provides a framework for managing various aspects of a z/OS system through a Web browser. Automating others, z/OSMF can help to simplify some areas of z/OS system management.

To learn more about z/OSMF, visit the links in the Learn More section.

To start managing your z/OS systems, select a task from the navigation area.

Learn More:

- [What's New](#)
- [z/OSMF tasks at a glance](#)
- [Getting started with z/OSMF](#)

After logging on, you can click on What's New to see new functions



# IBM z/OS Management Facility – What's New Enterprise 2014

The screenshot shows the IBM z/OSMF Management Facility help interface. The top navigation bar includes a search field, a language selector, and navigation icons. The left sidebar contains a tree view of help topics, with 'What's new in z/OSMF Version 2 Release 1' selected. The main content area displays the title 'What's new in z/OSMF Version 2 Release 1' and a paragraph describing the new tasks and enhancements. Below this, a list of links points to specific sections: 'New tasks', 'Enhancements to existing tasks', and 'Updates for user authorization management'. The 'New tasks' section includes a table listing tasks such as 'Import Manager', 'Notifications', and 'Workflows'. The 'Enhancements to existing tasks' section includes a table listing enhancements for 'Application Linking Manager' and 'Capacity Provisioning'.

Help - IBM z/OSMF Management Facility

Enter search terms All content Select language

Welcome > What's new in z/OSMF Version 2 Release 1

## What's new in z/OSMF Version 2 Release 1

This topic describes the new tasks and enhancements provided in z/OSMF Version 2 Release 1, and describes the changes for managing user authorizations.

The content is described in the following sections:

- [New tasks](#)
- [Enhancements to existing tasks](#)
- [Updates for user authorization management](#)

### New tasks

[Table 1](#) provides the name, description, and category for each *new* z/OSMF task. For a brief description of all z/OSMF tasks, see help topic [z/OSMF tasks at a glance](#).

*Table 1. Tasks*

Task	Description	Category
<b>Import Manager</b>	Import plug-ins, event types, event handlers, and links into z/OSMF.	z/OSMF Administration
<b>Notifications</b>	View and act on the z/OSMF notifications that have been assigned to you.	This task is not assigned to a category.
<b>Workflows</b>	Perform a guided set of steps, for example, to configure components or products in your installation.	This task is not assigned to a category.

### Enhancements to existing tasks

[Table 2](#) provides a brief description of the enhancements made to existing tasks.

*Table 2. Enhancements by task*

Task	Enhancements
<b>Application Linking Manager</b>	Allows you to define new event types and handlers by importing a properties file.
<b>Capacity Provisioning</b>	Supports Defined Capacity and Group Capacity.



# Use of the WebSphere Application Server Liberty Profile

Enterprise2014



IBM

- **Runs on smaller configurations**
  - Requires available CPU resource equivalent to a processor with a processor capacity index (PCI) of at least 45.
- **Initializes faster**
  - z/OSMF startup time varies considerably depending upon many factors.
    - These include CPU resource, z/OSMF Server configuration, number of starting applications, type of applications, etc.
    - In the laboratory, we have observed z/OSMF startup time to be approximately 30 seconds in a zEC12 LPAR consisting of one dedicated CPU
      - For the LPAR for the conference labs, startup time is about 10 seconds
      - However, the time was approximately 8 minutes with a minimally configured system.
- **Uses less CPU**
- **Uses less memory**
  - Requires one gigabyte (1 GB) of central storage.
    - This amount is in addition to your existing storage allocation for other applications running in the same z/OS system.
- **Installation of service is easier**
  - You no longer have to run a script (izusetup –service)





# Workflow Definition

---

- **Wikipedia**

- A **workflow** consists of an orchestrated and repeatable pattern business activity enabled by the systematic organization of resources into processes that transform materials, provide services, or process information.
- It can be depicted as a sequence of operations, declared as work of a person or group, an organization of staff, or one or more simple or complex mechanisms.

- **BusinessDictionary.com**

- A **workflow** is a progression of steps (tasks, events, interactions) that comprise a work process, involve two or more persons, and create or add value to the organization's activities.
- In a sequential workflow, each step is dependent on occurrence of the previous step; in a parallel workflow, two or more steps can occur concurrently.





## z/OSMF Workflow Application

- The z/OSMF Workflow application enables a Workflow provider (vendor or user) to define a guided flow through steps to accomplish a task.
- Step is the basic unit of workflow:
  - Steps may instruct the user to perform a task via:
    - Documentation or
    - Invoke wizards that guide the user to perform the task. Wizards can:
      - Update and submit jobs,
      - Execute shell scripts, and
      - Run REXX EXECs
  - Steps may define dependencies on other steps
  - Steps may be assigned to an individual or a specific role, such as
    - “systems programmer”
    - “security administrator”
  - Steps may be performed manually or automatically



## User Scenario (Product Configuration)



- **The system programmer installs a product's code that provides a z/OSMF Workflow for its configuration.**
- **The person that will configure the product logs on to z/OSMF and creates a new workflow from file provided by the product.**
  - z/OSMF prompts the user to provide the fully qualified location
  - z/OSMF reads in the metadata file(s).
  - This will create a workflow instance

**That person becomes the workflow owner**

- **The owner can then start by opening the workflow instance**
  - The owner can now view and assign tasks to either individual SAF users or a role (group of users)
- **Assignees will then get notified that tasks are assigned to them**
- **Each assignee then accepts the tasks and can perform the steps when they are ready.**
- **Everyone can track the progress of the workflow and view what steps have been completed, what steps are ready, and what steps are waiting**





## Demo of a Simple Workflow

---

- **Purpose of this workflow:**
  - z/OSMF Administrator plans user name to be created and the group to connect
  - Security Administrator does the actual security changes
  
- **Process:**
  - Create the workflow instance
  - Workflow owner assign steps to the appropriate person/role
  - Assignee gets notified a workflow step has been assigned to them
  - Assignee accepts steps
  - Assignee check if steps are ready for perform
  - Assignee performs the step(s)
    - Manually
    - Automated
  - Users can review the workflow History





# Create the Workflow Instance

IBM z/OS Management Facility Welcome zosmfad Log out IBM

Workflow main panel

Workflows

Simplifies tasks through guided step-based workflows, and provides administrative functions for assigning workflow responsibilities and tracking progress.

Actions

Workflow Name Filter	Description Filter	Version Filter	Vendor Filter	Owner Filter	System Filter	Status
<input type="checkbox"/> This workflow provides the steps for z/OS setup necessary for each plug-in that is to b - Workflow_0	This workflow setup necessary be configur					In Progress
<input type="checkbox"/> Susans test- Workflow_0	z/OS setup					In Progress
<input type="checkbox"/> z/OS setup for each z/OSMF plug-in. - Workflow_0	z/OS setup					In Progress
<input type="checkbox"/> testing -service	z/OS setup					In Progress
<input type="checkbox"/> rpd10 workflow items	z/OS setup					In Progress
<input type="checkbox"/> april 24, 2012 z/OS setup for each z/OSMF plug-in. - Workflow_1	z/OS setup					In Progress
<input type="checkbox"/> Sample workflow for demo - Workflow_0	Sample workflow					Complete

Create Workflow

Type or select a workflow definition file to use for creating a new workflow. For a z/OS data set, specify a fully qualified name, with no quotes.

Workflow definition file:

/tmp/workflow\_demo.xml

Type or select a variable input file to populate the new workflow. For a z/OS data set, specify a fully qualified name, with no quotes.

Workflow variable input file:

Select or type

Path of workflow

Input property file

Total: 7, Selected: 0

Refresh Last refresh: Jul 23, 2014, 10:33:16 PM local time (Jul 23, 2014, 2:33:16 PM GMT)





# z/OSMF Workflow Instance Display

IBM z/OS Management Facility Welcome zosmfad Log out

Welcome x Workflows x

Workflows ▶ Simple workflow for demo Help

## Simple workflow for demo

Description: Sample workflow for demo  
Percent complete: 

Progress bar (Support weight value)

 0%

Owner: zosmfad  
Steps complete: 0 of 3

System: PLEX1.SY1  
Status: In Progress Notes, History

Workflow Steps

State Filter	No. Filter	Title Filter	Automated Filter	Owner Filter	Skill Category Filter	Assignees Filter
<input type="checkbox"/> Unassigned	1	<input type="checkbox"/> Plan User ID and Group Name	Yes		zOSMF Administrator	
<input type="checkbox"/> Unassigned	2	<input type="checkbox"/> Make security changes				
<input type="checkbox"/> Unassigned	2.1	<input type="checkbox"/> Creat user	Yes		Security Administrator	
<input type="checkbox"/> Unassigned	2.2	<input type="checkbox"/> Connect user to a group	Yes		Security Administrator	

Total: 4, Selected: 0

**Automatic Indication**

**Step status**

**Current assignee**

**Required skill category:**

- System Programmer
- Security Administrator

**All steps initially unassigned**

**Several steps can be expanded to show individual tasks**





## Workflow Owner Assigns Steps

Additional SAF users can be added and assigned tasks





# Assignee gets Notified

Notification received

Welcome ibmuser Log out IBM.

Notifications (1)

Description Filter	Task Filter	Recipients Filter	Time Filter
One or more steps in workflow "Simple workflow for demo" have been assigned to you.	Workflows	z/OS Security Administrator	Jul 23, 2014, 10:54:00

Click notification brings you to the workflow instance

IBM z/OS Management Facility Welcome ibmuser Log out IBM.

Workflows Simple workflow for demo

**Simple workflow for demo**

Description: Sample workflow for demo  
Percent complete: 0%

Owner: zosmfad System: PLEX1.SY1  
Steps complete: 0 of 3 In Progress

Workflow Steps

State Filter	No. Filter	Title Filter	Automated Filter	Owner Filter	Skill Category Filter
Assigned	1	Plan User ID and Group Name	Yes		z/OS Security Administrator
In Progress	2	Make security changes			
Assigned	2.1	Create user	Yes		Security Administrator
Assigned	2.2	Connect user to a group	Yes		Security Administrator

Current assignee

State is now Assigned



# Assignee Accepts Steps

Enterprise2014



IBM

**Actions**

State Filter	No. Filter	Title Filter
Assigned	1	Plan User ID and Group Name
In Progress	2	Make security changes
Assigned	2.1	Creat user
Assigned		Connect user to a group

Properties:

- Accept
- Perform
- Skip
- Status
- Override Complete
- Resolve Conflicts
- Assignment And Ownership
- Expand
- Collapse

**Accept step**

**Accept Step**

Selected Steps

No.	Title	State	Owner
2	Make security changes	In Progress	
2.1	Creat user	Assigned	
2.2	Connect user to a group	Assigned	

Total: 3

Comments:

Security Administrator accepts these steps.

**Input comments if desired**

Workflows > Simple workflow for demo

**Simple workflow for demo**

Description: Sample workfl  
Percent comp

Owner: zosmfad  
Steps complete: 0 of 3

System: PLEX1.SY1  
Status: In Progress

Notes | History

**State will be Ready or Not Ready**

Workflow Steps

State Filter	No. Filter	Title Filter	Automated Filter	Owner Filter	Skill Category Filter	Assignees Filter
Ready	1	Plan User ID and Group Name	Yes	zosmfad	zOSMF Administrator	z/OSMF Administrator
In Progress	2	Make security changes				
Not Ready	2.1	Creat user	Yes	ibmuser	Security Administrator	z/OS Security Administrator
Not Ready	2.2	Connect user to a group	Yes	ibmuser	Security Administrator	z/OS Security Administrator



# z/OSMF Dependency Checking

Enterprise2014



IBM

Actions							
State Filter	No. Filter	Title Filter	Automated Filter	Owner Filter	Skill Category Filter	Assignees Filter	
Ready	1	Plan User ID and Group Name		zosmfad	zOSMF Administrator	z/OSMF Administrator	
In Progress	2	Make security changes					
Not Ready	2.1	Create user	Yes	ibmuser	Security Administrator	z/OS Security Administrator	
Not Ready	2.2	Connect user to a group	Yes	ibmuser	Security Administrator	z/OS Security Administrator	

Click the step

Welcome x Workflows x

Workflows > Simple workflow for demo > 2.1. Create user [Help](#)

### Properties for Workflow Step 2.1. Create user

General **Details** Notes Perform Status Input Variables

State: Not Ready Skill category: Security Administrator

Owner: ibmuser Assignees: z/OS Security Administrator

#### Step Dependencies

Step Dependencies

State Filter	No. Filter	Title Filter	Step Dependencies Filter	Owner Filter	Assignees Filter
Ready	1	Plan User ID and Group Name		zosmfad	z/OSMF Administrator

Total: 1

Step Dependencies

Prerequisite steps need to be completed





# Assignee Performs Step Manually

The screenshot illustrates the manual execution of a workflow step in IBM Enterprise 2014. The interface is divided into two main sections: a task list on the left and a detailed step view on the right.

**Task List (Left):** A table with columns 'State Filter', 'No. Filter', and 'Title Filter'. The first row is 'Plan User ID and Group Name' with a 'Ready' state and a count of '1'. A context menu is open over this row, showing options: 'Properties', 'Accept', 'Perform' (highlighted), 'Skip', 'Status', 'Override Complete', 'Resolve Conflicts', 'Assignment And Ownership', 'Expand', and 'Collapse'.

**Step View (Right):** The 'Properties for Workflow Step 1. Plan User ID and Group Name' window is shown. It has tabs for 'General', 'Details', 'Notes', 'Perform', and 'Status'. The 'Perform' tab is active, displaying 'Input Variables - User information' with fields for 'User name' (CJOEY) and 'UID' (5008). A callout bubble labeled 'User's input' points to these fields. At the bottom, the 'Next >' button is circled.

**Review Instructions (Bottom):** The 'Perform' tab is selected, showing 'Review Instructions'. The text states: 'Review and confirm the instructions provided below have been performed on PLEX1.SY1, then click Finish to mark the step complete.' Below this, the 'Instructions' section lists: 'The following user will be added by last step: user name: CJOEY, user id: 5008. And CJOEY will be connected to existing group IZUUSER.' A callout bubble labeled 'Documentation is changed accordingly' points to this text. At the bottom, the 'Finish' button is circled.



# Next Step is Now Ready to be Performed (Wizzard to submit a Job)

Enterprise2014



IBM

State Filter	No. Filter	Title Filter
<input type="checkbox"/> Complete	1	Plan User ID and Group Name
<input checked="" type="checkbox"/> In Progress	2	Make security changes
<input checked="" type="checkbox"/> Ready	2.1	Create user
<input type="checkbox"/> Not Ready		Connect user to a group

Properties

Accept

Perform

Skip

Status

Override Complete

Resolve Conflicts

Assignment And Ownership ▶

Expand

Collapse

## Perform options

- Notice that steps can be performed automatically or manually

**Perform Automated Step**

The selected step can be performed automatically. How would you like to proceed?

☐ Automatically perform the selected step, and all subsequent automated steps, according to their declared step dependencies, until one of the following occurs:

- all workflows steps have been completed.
- a non-automated, non-Complete step, is reached, or
- an error occurs.

☐ Automatically perform the selected step only.

☒ Manually perform the selected step.

When input file variable conflicts occur:

☒ Always use input file values. Existing values will be overwritten and automation will continue.

☐ Always keep existing values. Input file values will be ignored and automation will continue.

☐ Allow step or workflow owner to choose whether the input file value or existing value should be used for each conflicting variable. Automation will be stopped.

OK Cancel Help

General Details Notes **Perform** Status Input Variables

✓ Input Variables

➔ User information

✓ Review Instructions

✓ Create JOB statement

✓ Review JCL

Submit and Save JCL

**Input Variables - User information**

Enter the variable values for this input category.

**Customize embedded JCL via Input**

\*User name- The user name to be created: ⓘ

CJOEY

\*UID- z/OS UNIX System Services UID: ⓘ

5008

General Details Notes **Perform** Status Input Variables

✓ Input Variables

✓ User information

✓ Review Instructions

✓ Create JOB statement

➔ Review JCL

Submit and Save JCL

**Review JCL**

Review the generated JCL, then click **Next** to proceed. Optionally, you can edit the JCL.

```
//IZUWFJB JOB (ACCTINFO),CLASS=A,MSGCLASS=0,
//
//          MSGLEVEL=(1,1),REGION=0M,NOTIFY=IBMUER
/*JOBPARM  SYSAFF=SY1
//STEP1    EXEC  PGM=IKJEFT01,DYNAMNBR=20
//SYSTSPT  DD    SYSOUT=A
//SYSTSIN  DD    *
ADDUSER    CJOEY NOPASSWORD OMVS(UID(5008))
/*
```

Edit JCL Maximum record length: ⓘ 1,024

< Back Next > Save Finish Cancel

right IBM Cor



# Assignee Performs Step Automatically



Welcome x Workflows x

Workflows ▶ Simple workflow for demo Help

### Simple workflow for demo

Description:  
Sample workflow for demo

Percent complete:  50%

Owner: zosmfad  
Steps complete: 2 of 3

System: PLEX1.SY1  
Status: Automation in Progress [ibmuser]

[Notes](#) | [History](#)

**Automation indication**

#### Workflow Steps

State Filter	No. Filter	Title Filter	Automated Filter	Owner Filter	Skill Category Filter	Assignees Filter
<input checked="" type="checkbox"/> Complete	1	Plan User ID and Group Name	Yes	zosmfad	zOSMF Administrator	z/OSMF Administrator
<input checked="" type="checkbox"/> In Progress	2	Make security changes				
<input checked="" type="checkbox"/> Complete	2.1	Creat user	Yes	ibmuser	Security Administrator	z/OS Security Administrator
<input type="checkbox"/> Ready	2.2	Connect user to a group	Yes	ibmuser	Security Administrator	z/OS Security Administrator

Welcome x Workflows x

Workflows ▶ Simple workflow for demo Help

### Simple workflow for demo

Description:  
Sample workflow for demo

Percent complete:  100%

Owner: zosmfad  
Steps complete: 3 of 3

System: PLEX1.SY1  
Status: Complete

[Notes](#) | [History](#)

**Automation Done**

**Step 2.2 will be automatically started**

#### Workflow Steps

State Filter	No. Filter	Title Filter	Automated Filter	Owner Filter	Skill Category Filter	Assignees Filter
<input checked="" type="checkbox"/> Complete	1	Plan User ID and Group Name	Yes	zosmfad	zOSMF Administrator	z/OSMF Administrator
<input checked="" type="checkbox"/> Complete	2	Make security changes				
<input checked="" type="checkbox"/> Complete	2.1	Creat user	Yes	ibmuser	Security Administrator	z/OS Security Administrator
<input checked="" type="checkbox"/> Complete	2.2	Connect user to a group	Yes	ibmuser	Security Administrator	z/OS Security Administrator



# Review History

Enterprise2014



Welcome x Workflows x

Workflows > Simple workflow for demo > History

## History for Simple workflow for demo

Actions ▼					
	Date and Time (GMT) Filter	Action Filter	Messages <a href="#">[More   Less]</a> Filter	User ID Filter	Comments <a href="#">[More   Less]</a> Filter
<input type="radio"/>	Jul 23, 2014, 2:37:19 PM	Workflow Created	<p><a href="#">IZUWF0020</a>:The workflow name is set to "Simple workflow for demo" .</p> <p><a href="#">IZUWF0021</a>:The workflow owner is set to "zosmfad" .</p> <p><a href="#">IZUWF0022</a>:The workflow system is set to "SY1" .</p> <p><a href="#">[More]</a></p>	zosmfad	
<input type="radio"/>	Jul 23, 2014, 2:44:21 PM	Step Assigned	<p><a href="#">IZUWF0025</a>:The following users have been assigned to step "Plan User ID and Group Name" : Users: "z/OSMF Administrator"</p> <p><a href="#">IZUWF0026</a>:Step "Plan User ID and Group Name" has changed to state "Assigned" .</p>	zosmfad	
<input type="radio"/>	Jul 23, 2014, 2:54:57 PM	Step Assigned	<p><a href="#">IZUWF0025</a>:The following users have been assigned to step "Creat user" : Users: "z/OS Security Administrator"</p> <p><a href="#">IZUWF0026</a>:Step "Creat user" has changed to state "Assigned" .</p> <p><a href="#">[More]</a></p>	zosmfad	Workflow owner assigns these security related steps to Security Administrator.
<input type="radio"/>	Jul 23, 2014, 3:07:12 PM	Step Accepted	<p><a href="#">IZUWF0045</a>:User "ibmuser" has accepted step "Creat user" . This user is now the step owner.</p> <p><a href="#">IZUWF0026</a>:Step "Creat user" has changed to state "Not Ready" .</p> <p><a href="#">IZUWF0045</a>:User "ibmuser" has accepted step "Connect user to a group" . This user is now the step</p> <p><a href="#">[More]</a></p>	ibmuser	Security Administrator accepts these steps.
<input type="radio"/>	Jul 23, 2014, 3:10:42 PM	Step Accepted	<p><a href="#">IZUWF0045</a>:User "zosmfad" has accepted step "Plan User ID and Group Name" . This user is now the step owner.</p> <p><a href="#">IZUWF0026</a>:Step "Plan User ID and Group Name" has changed to state "Ready" .</p>	zosmfad	z/OSMF admin accepts this step to plan the user name to be created.
<input type="radio"/>	Jul 23, 2014, 3:30:55 PM	Step Completed	<p><a href="#">IZUWF0026</a>:Step "Plan User ID and Group Name" has changed to state "Complete" .</p> <p><a href="#">IZUWF0026</a>:Step "Creat user" has changed to state "Ready" .</p>	zosmfad	
<input type="radio"/>	Jul 23, 2014, 3:38:56 PM	Automation Started	<a href="#">IZUWF0160</a> :The automation processing for workflow "Simple workflow for demo" has been started by user "ibmuser" from step "Creat user" .	ibmuser	
<input type="radio"/>	Jul 23, 2014, 3:38:56 PM	Submitted	<a href="#">IZUWF0026</a> :Step "Creat user" has changed to state "Submitted" .	ibmuser	
<input type="radio"/>	Jul 23, 2014, 3:38:57 PM	Step Completed	<p><a href="#">IZUWF0026</a>:Step "Creat user" has changed to state "Complete" .</p> <p><a href="#">IZUWF0026</a>:Step "Connect user to a group" has changed to state "Ready" .</p>	ibmuser	
<input type="radio"/>	Jul 23, 2014, 3:38:59 PM	Automate Step Complete	<a href="#">IZUWF0164</a> :Automation processing for step "Creat user" is complete.	ibmuser	
<input type="radio"/>	Jul 23, 2014, 3:38:59 PM	Submitted	<a href="#">IZUWF0026</a> :Step "Connect user to a group" has changed to state "Submitted"	ibmuser	
Total: 15, Selected: 0					





## z/OSMF Workflow Application

- **The z/OSMF Workflow application is useful to:**
  - Assist people unfamiliar with how to perform a given task, or a task that they perform rarely
  - Ensure that all tasks are performed in the right order and only when their dependencies have been met
  - Ensure that all steps are completed
    - Even if many of the tasks have been delegated to a number of different colleagues
  - Monitor and track progress toward the completion of the task
  - Provide a history (audit trail) of the steps performed for a task
  - Perform the same tasks on multiple systems
    - Enabling a function (e.g. zEDC)
    - Migrating a new release of software (e.g., z/OS)





## z/OSMF Workflow Exploitation

- **z/OSMF V2.1 has limited exploitation of the Workflow application**
  - z/OSMF V2.1 Configuration Assistant can create seven new workflows, and uses the Workflow engine to setup the policy agent and other daemons.
  - z/OSMF V2.1 with PTF UI90005 delivers a z/OSMF configuration workflow.
    - This PTF enhances the configuration workflow through the discovery functions of z/OS and z/OSMF configuration settings to determine the status of the current setup. \*\*
    - It is located at /usr/lpp/zosmf/V2R1/workflow/izu.config.setup.xml
    - Intent is to enhance it over time and add more capability
    - The configuration guide is still the complete source of information, although the workflow may be used to manage the steps required to setup the system pre requisites at a high level.
  - On the z/OS Downloads web page (<http://www.ibm.com/systems/z/os/zos/tools/downloads/index.html>) a sample workflow is available to evolve the *z/OS Migration* book into a z/OSMF z/OS V2R1 Migration Workflow.
  - z/OSMF V2.1 includes a number of sample workflow definition files
    - They are located at /usr/lpp/zosmf/V2R1/workflow
    - The samples include a workflow that identifies the z/OS system customization steps for each of the plug-ins.

\*\* available for z/OSMF V2.1 with PTF UI90005 and its requisite PTFs

© Copyright IBM Corporation 2014





## Workflow Recent Enhancements \*\*

### PTFs UI90005 and UI90014 (9/30/2014) enhance the Workflows task to enable:

- A workflow step to be designed to save its output in an *output file* which on completion of the step, the contents of the output file become available for use by subsequent steps in the workflow instance, or by other workflow instances. \*\*
- A workflow step to be designed to be performed conditionally, based on whether a logical condition is satisfied on the z/OS system. \*\*

\*\* available for z/OSMF V2.1 with PTF UI90005 and its requisite PTFs



## Workflow - Variables from a JCL/REXX/Shell script execution\*\*

Enterprise2014



IBM

- With new feature, users can generate variable value dynamically by JCL/REXX/Shell script within a workflow step.
- Typically, an output properties file is used to contain the results of a batch job, shell script, or REXX exec program.
  - On completion of the step, variable values in the output properties file become available for use by subsequent steps in the workflow instance.
    - For example, a step might submit a batch job to create some output data, which is then used as input by a subsequent step.
- The format of output properties file is same as workflow variable input file ---- a list of variable name-value pairs.

*key1 = value1*

*key2 : value2*

*key3 value3*

\*\* available for z/OSMF V2.1 with PTF UI90005 and its requisite PTFs



# Workflow – Specify output file in definition file \*\*

Enterprise2014



IBM

- Workflow author needs to specify “**output**” element --- the default path of output file which contains the variable name-value pairs.
- The output file name/path can be derived from input variable value
- In Template file, “**\$\_output**” is the reference of output file path.

```
<step name="output">
  <title>A step with an output property file</title>
  <description>In this step, you execute a JCL job to generate an output property file.</description>
  <variableValue name="st_user" required="true" noPromptIfSet="true"/>
  <variableValue name="setting0" required="true" scope="global"/>
  <variableValue name="outputFileNameVariable" required="true"/>
  <instructions>
    In this example step, some variable values are generated into a pre-specified output file and after perform, t
  </instructions>
  <weight>5</weight>
  <skills>System Programmer</skills>
  <template>
    <inlineTemplate substitution="true"># shell script to generate some variables from workflow
    echo st_user USER001 >> $_output
    echo setting0 global001 >> $_output
    </inlineTemplate>
    <submitAs maxRc="0">shell-JCL</submitAs>
    <output substitution="true">/u/tmp/${instance-outputFileNameVariable}</output>
  </template>
</step>
```

\*\* available for z/OSMF V2.1 with PTF UI90005 and its requisite PTFs





# Workflow – Step perform panel \*\*

**Properties for Workflow Step 1. A step with an output property file**

General Details Notes **Perform** Status Input Variables

☒ Input Variables  
☒ started  
☒ global variable  
☒ **Output file**  
 Review Instructions  
Edit Output File Path  
 Create JOB statement  
 Review JCL  
 Submit and Save JCL

**Input Variables - Output file**  
Enter the variable values for this input variable.

\*File name for output file - Enter a value

out.txt

**Properties for Workflow Step 1. A step with an output property file**

General Details Notes **Perform** Status Input Variables

☒ Input Variables  
☒ started  
☒ global variable  
☒ Output file  
☒ Review Instructions  
☒ **Edit Output File Path**  
 Create JOB statement  
 Review JCL  
 Submit and Save JCL

**Edit Output File Path**  
This is the description for the output file path.

Output File Path:  
Specify output file path here:

/u/tmp/out.txt

☒ Edit Output File Path  
☒ Create JOB statement  
☒ **Review JCL**  
 Submit and Save JCL

```

//SYSTSPRT DD SYSOUT=*
//*
//SYSIN    DD DUMMY
//*
//SYSUT2   DD PATH='/tmp/IZUWORKFLOW-14031656280180.342171'
//*
//SYSUT1   DD *,DLM=$$
# shell script to generate some variables from workflows task t
echo st_user USER001 >> /u/tmp/out.txt
echo setting0 global001 >> /u/tmp/out.txt

$$
/*
/*****
STEP 1: Generate variables from workflows task t
*****/
  
```

Edit JCL Maximum record length: 1,024

< Back Next > Save Finish Cancel

\*\* available for z/OSMF V2.1 with PTF UI90005 and its requisite PTFs





## Workflow – Variable conflict \*\*

- If the JCL/REXX/Shell script runs successfully, workflow will try to load all defined variables from the output file. If those variables have existing values, user should resolve variable conflicts in the "Input Variables" tab:

### Properties for Workflow Step 1. A step with an output property file

General Details Notes Perform Status **Input Variables**

▼ Messages 0 1 0 Close All

**IZUWF0176W:** One or more variable values from input file "\u\lucy\out.txt" conflict with existing variable values. Jun 20, 2014, 4:27:03 PM X

For each conflicting variable, select the desired new value from either the existing or input file value. After all selections have been made, click the **Apply New Value Selections** button to confirm. To quickly clear all New Values or set all New Values to the existing or input file value, click on the menu button(▼) in the header.

Input variables properties file:  
\u\lucy\out.txt

☐ Check it only show the conflict variables rows.

All variables in output file that have been defined in the XML definition will be displayed.

Choose the action for all variable conflict

Variable Name	Variable Type	Default Value	Existing Value	Input File Value	New Value	Load or Confl	Step	Last Modified	Description
setting0	global	setting0	global02	000A	▼ Set All to Existing Value Set All to Input File Value Clear all Selections				A global scope string variable.
st_user	instance	MYSTATUS	MYSTATUS	USERA	Select...	↔ User Modified Conflict	1.A step with an output property file		User ID for the started task.

Total:2

Apply New Value Selections... Refresh

\*\* available for z/OSMF V2.1 with PTF UI90005 and its requisite PTFs





## Workflow – Conflicts state \*\*

- If user doesn't resolve the variable conflict, the step is in "Conflicts" state, the state label in Workflow Details panel will become a red arrow and most of step actions will be disabled.
- User can select the "Resolve Conflicts" action to open the "Input variables" panel in previous slide.

Workflow Steps

State Filter	No. Filter	Title Filter
Conflicts	1	A step with an output property file

Workflow Steps

Actions

- Properties
- Accept
- Perform
- Skip
- Override Fail
- Status
- Override Complete
- Resolve Conflicts
- Assignment And Ownership
  - Add Assignees...
  - Remove Assignees...
  - Take Ownership
  - Return
- Expand
- Collapse
- Select All Steps Assigned to Me
- Stop Automation

\*\* available for z/OSMF V2.1 with PTF UI90005 and its requisite PTFs





## Workflow – Variable conflict action \*\*

- Actions for user to resolve variable conflicts:
  - Select the appropriate value in dropdown list of each row one by one
  - Set All to Existing Value: Set all conflict variable values to existing value, this means all variable values from output file will be ignored
  - Set All to Input File Value: Set all conflict variable values to the values that come from output file
  - Clear All Selections: Clear all user already selected values and set them all back to "Select..." in the drop down list
  - Apply New Value Selections...: Apply all user selected variable values as the new variable value and set to workflow variable pool
  - Refresh: Get and reload the latest variable values
- After user clicks the "Apply New Value Selections..." button, a warning dialog will popup to ensure that all selections will not be able to change any more after clicking the "Apply" button.
- Element "output" has an optional attribute "**needResolveConflicts**". The default is true. If set to false, the Workflows task uses the output file variables in place of any existing values without prompting the user. This setting applies to instance variables only; global variables are not overridden by variables in the output.

\*\* available for z/OSMF V2.1 with PTF UI90005 and its requisite PTFs





## Workflow – Conditional steps feature \*\*

- With the support of conditional step feature, workflow author can specify under what condition a workflow step is ready to perform or skip.
  - This will improve the flexibility for workflow author to control their steps.
- The condition expression can be based on workflow variables and step attributes ("**returnCode**" and "**stepState**").

```

<step name="condWithStepAttr">
  <title>A step attribute conditional step</title>
  <description>In this step, step attributes are used in the condition expression.</description>
  <prereqStep name="submitEmptyJCL" />
  <condition>
    <expression><![CDATA[ ${submitEmptyJCL.returnCode} == "0000" ||
    ${variableStep.stepState} == "Skipped" ]]></expression>
    <description>This step state will become "Skipped" when:<br/>
      o - The return code of step "submitEmptyJCL" equals to "0000"<br/>
      o - OR The stepState of step "variableStep" equals to "Skipped".
    </description>
    <targetState>Skipped</targetState>
  </condition>
  <instructions>
    In this sample step, step attributes such as "returnCode" and "stepState" are used in the expression of a
    conditional step.
  </instructions>

```


*locates between <prereqStep> and <variableValue> if exist*

*supports two states: Skipped, Ready (default)*

\*\* available for z/OSMF V2.1 with PTF UI90005 and its requisite PTFs



# Workflow – Conditional steps based on variables \*\*



Enterprise2014

**Properties for Workflow**

General Details Note

State: Not Ready Skill category: System Program

Owner: zosmfad Assignees: zosmfad

Conditional Dependency

Satisfied: ☒ No

Description: This step state will become "Ready" when:

- o - The value of the instance variable st\_user equals to "USERA";
- o - The value of the global variable setting0 equals to "global01";
- o - The value of setting1 in step "variableStep" is set to "test01".

Expression: `${instance_st_user} == "USERA" || ${global_setting0} == "global01" || ${instance_setting1, variableStep} == "test01"`

Expression Variable Values

Variable Name	Step No.	Step Title	Scope	Desired Update Step	Current Value
st_user			instance		
setting0			global		global02
setting1	1	Variable Step	instance	variableStep	

Refresh

```

<step name="condWithVariables">
  <title>A variable conditional step</title>
  <description>In this step, some variable values are used in the condition expression.</description>
  <condition>
    <expression><![CDATA[ ${instance_st_user} == "USERA" || ${global_setting0}
    == "global01" || ${instance_setting1, variableStep} == "test01" ]]>
    </expression>
    <description>This step state will become "Ready" when:<br/>
    o - The value of the instance variable st_user equals to "USERA";<br/>
    o - The value of the global variable setting0 equals to "global01";<br/>
    o - The value of setting1 in step "variableStep" is set to "test01".
    </description>
  </condition>
  <instructions>
    In this sample step, some variables are used in the expression of a workflow conditional step.
  </instructions>
  </step>

```

*Whether the value is changed to test01 in specified step*

*targetState element is omitted. Default is "Ready"*


**\*\* available for z/OSMF V2.1 with PTF UI90005 and its requisite PTFs**



## Workflow – Conditional steps operation \*\*



- After all prerequisites have been complete, workflow will check if the condition of this step is satisfied, then put it in “Not Ready”, “Ready” or “Skipped” state accordingly.
- If user try to perform an unsatisfied conditional step, the message IZUWF0181W will show up in the "Perform Override" dialog.
  - User can click on "OK" button to force perform this step with unsatisfying its condition or click "Cancel" button to close the Perform Override dialog.

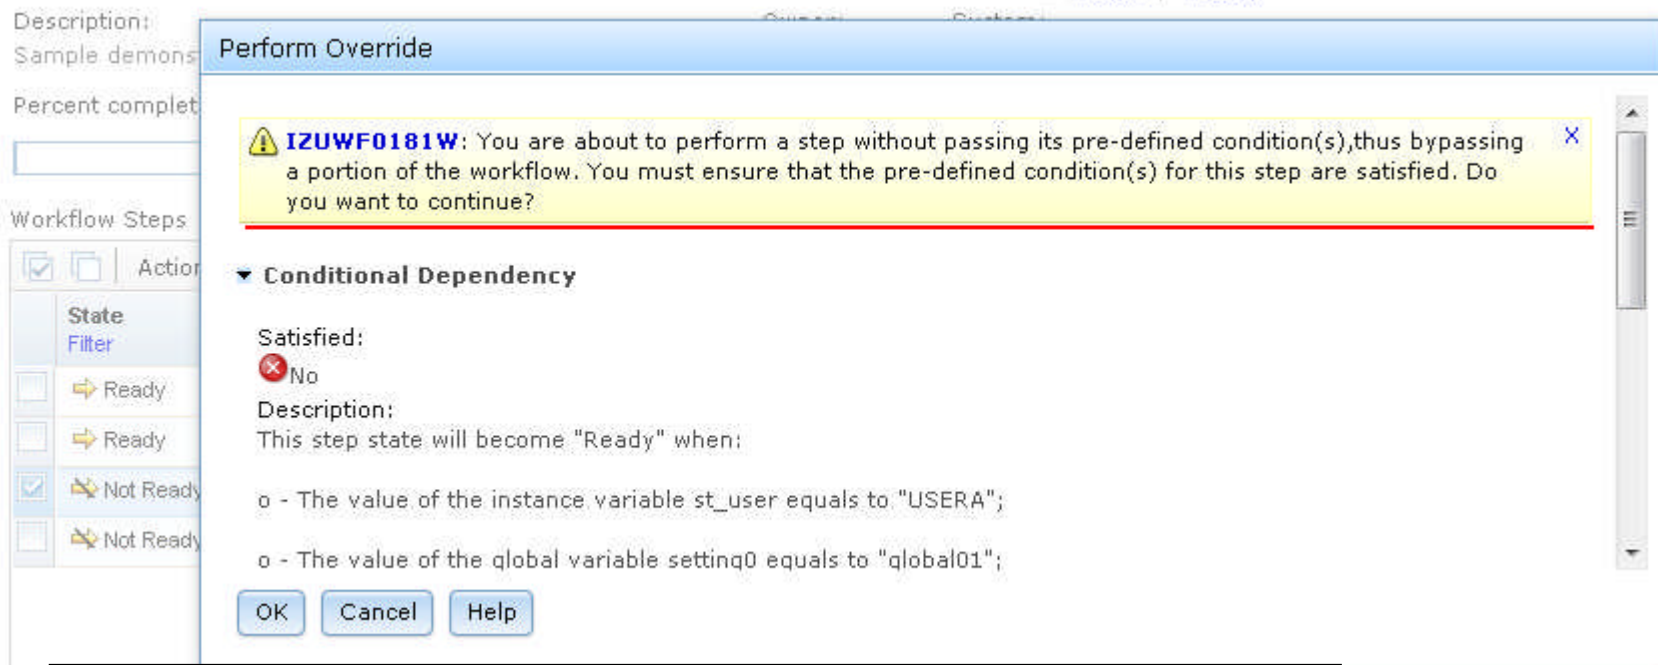

\*\* available for z/OSMF V2.1 with PTF UI90005 and its requisite PTFs





## External Application Support\*

- External application support enables non-z/OSMF web application – html and/or JavaScript applications to render their UI and run in the z/OSMF browser.
- The external applications can be added to z/OSMF navigation in a category selected by the user, and communicate with associated z/OS back-end components.
- Customers and vendors can create their own web applications and register to z/OSMF at runtime.
  - SDSF is the first exploiter (available with PTF UI15294).
- No special configuration is required to add the web application to the navigation.
- z/OS customization may be needed for backend z/OS component e.g. security setup, starting the z/OS function
  - Application specific z/OS setup should be defined by the application owner.

\* available for z/OSMF V2.1 with PTF UI16044 and its requisite PTFs





- **External application support includes two major parts:**
  - **A set of Restful services which are invoked by external application to retrieve or send data to associated z/OS back-end applications. Services include:**
    - **TSO/E Services,**
    - **Persistence services and**
    - **File Serving Services**
  - **Import Manager, task and application linking registration mechanism by properties files, externalized JavaScript logger and JavaScript callbacks.**
    - **The new Import Manager task under z/OSMF Administration provides the GUI interface to import the properties file and register the web application in the navigation**

\* available for z/OSMF V2.1 with PTF UI16044 and its requisite PTFs





## Process of plug-in registration\*

- Before adding a plug-in to z/OSMF, user should have one or more web applications ready, including the client side code and online help documentation in the z/OS UNIX file system.
- The z/OS application needs to provide a property file that describes the attributes for the web interface and defines all the required parameters for z/OSMF.
- The z/OSMF Administrator can register the web application by providing the path of the property file in the Import Manager.
- The Import Manager task will convert the parameters in property file into plug-in object and register the plug-in with tasks.
- With the successful registration and FileServingServlet, the navigation URLs of external plug-ins tasks could be accessed following the pattern of `"/zosmf/lzuUICommon/externalfiles/relativefilepath"` .

\* available for z/OSMF V2.1 with PTF UI16044 and its requisite PTFs





## External application properties file\*

- In one property file only one type of definition can be specified
  - External plug-ins
  - Application linking handlers
  - Application linking events
  - External links
- A properties file may contain multiple definitions of any one type
  - multiple links, or multiple handlers or multiple plugins
- z/OSMF will provide format of properties file in the programming guide
- z/OSMF will provide services to integrate with the z/OSMF framework

\* available for z/OSMF V2.1 with PTF UI16044 and its requisite PTFs






## Import Manager\*

- **The Import Manager task provides the following functions:**
  - Add plug-in to z/OSMF
  - Add application linking event types and handlers to z/OSMF.
  - Add links to z/OSMF
  - View the property file content before import.
  - View/Delete the import history records.
  - View the historical property file content of the import records.
  - Application linking from Links and Application Linking Manager tasks to Import Manager
- **Note: Existing Links task registers external links one at a time via GUI interface**
  - User has to type in all the information on the GUI panel
- **Note: Existing Application linking manager still available for defining application linking events and handlers via a GUI**
  - one at a time
  - required for other apps that are not hosted in z/OSMF

\* available for z/OSMF V2.1 with PTF UI16044 and its requisite PTFs





# Import Manager – Import Tab\*

IBM z/OS Management Facility Welcome zmfdev1

Navigation Tree:

- Welcome
- Notifications
- Workflows
- Configuration
- Jobs and Resources
  - SDSF**
- Links
- Performance
- Problem Management
- Software
- z/OS Classic Interfaces
- z/OSMF Administration
  - Application Linking Manager
  - Import Manager**
  - Links
- z/OSMF S...

Buttons: Refresh

Import Manager Tabs: Import, History

z/OSMF Administrators can view the registration records and the history registration file. Delete the registration records.

To add plug-ins, event types, handlers, and links in z/OSMF, specify the property file to import. [Learn more...](#)

You can get instruction here

Property file: /usr/lpp/sdsf/zosmf/sdsf.properties View Import

Contents of property file: /usr/lpp/sdsf/zosmf/sdsf.properties

```
importType=plugin
izu.externalapp.file.version=1.0.0
izu.externalapp.local.context.root=sdsf
izu.externalapp.code.root=ui
izu.externalapp.help.root=helps

izu.externalapp.helpdoc.1=com.ibm.zosmfsdsf.jobresources.help.doc
izu.externalapp.helpdoc.2=com.ibm.zosmfsdsf.settings.help.doc
izu.externalapp.helpdoc.3=com.ibm.zosmfsdsf.messages.help.doc

pluginId=com.ibm.zos.sdsf
pluginDefaultName=IBM SDSF
pluginDescription=Administer and operate SDSF to monitor your JES jobs and
```

Property file content view

After you import the property file, the task shows up

New navigation task for z/OSMF Administrators

\* available for z/OSMF V2.1 with PTF UI16044 and its requisite PTFs



## SDSF Plug-in\* Overview

- The SDSF product provides a web interface through a z/OSMF SDSF Plug-in.
  - The Javascript UI calls RESTful web services to retrieve data and perform actions.
- This Plug-in can
  - Show graphic/textual overview about Processors, Spool, Health Checker
  - Display a table of Job list in different status/queue. The property column, filters, sort can be customized, and the table can be exported and printed.
  - Enable users to select a Job, view detailed properties, and perform actions such as Cancel, Edit, Submit, etc.
  - Issue system command and display output.
  - **Display the User Session Log. Users can search and take notes.**

\* available with z/OS V2.1 SDSF PTF UI15294 and z/OSMF V2.1 with PTF UI16044





# SDSF Overview\*

**SDSF (PLEX1)**

**Overview**

Explore the summary data, or choose a task.

**System Activity Summary: SYS00001 (Local)**

System: **SYS00001 (Local)** [View text](#)

**System Activity Percent Busy**

Component	Percent Busy
zAAP	50%
zIIP	84%
LPAR	25%
MVS / SRM	100%
Spool	65%

**z/OS Health Checks by Severity**

Severity	Count
None	28
Low	59
Medium	85
High	82

Active checks: 110 Eligible checks: 200

**Refresh** Last refresh: 9 seconds ago [View icons](#)

**Jobs**

- [Active Jobs](#) Work with active jobs
- [All Jobs](#) Work with jobs in any phase of processing
- [Input Queue](#) Work with jobs on the input queue
- [Output Queue](#) Work with jobs on the output queue
- [Held Output Queue](#) Work with jobs on the held output queue

**z/OS Health Checks**

- [z/OS Health Checks](#) Manage z/OS Health Checks

**z/OS Commands and Logs**

System command line: SYS00001 (Local) [Command reference](#)

Type command here (Maximum 255 characters) [Submit](#)

**User Session Log** Display and search the User Session Log

Different Common Filters can apply to different views : Active Jobs, All Jobs, Held Output Queue, Input Queue, Output Queue, Health Checks

**View text** can change the graphics to text view. **System** drop list or **Refresh** button can update the System Activity Summary. **Common Filters** don't apply to this view.

This link can change to more abbreviated icon view. Clicking each view link can open new tab


This link opens help related to starting words typed by users. A command history of 30 commands will be saved in the combo box . Command responses are displayed in a pop-up window. The results also go to the User Session Log and can be seen there.

\* available with z/OS V2.1 SDSF PTF UI15294 and z/OSMF V2.1 with PTF UI16044





# All Jobs View \*

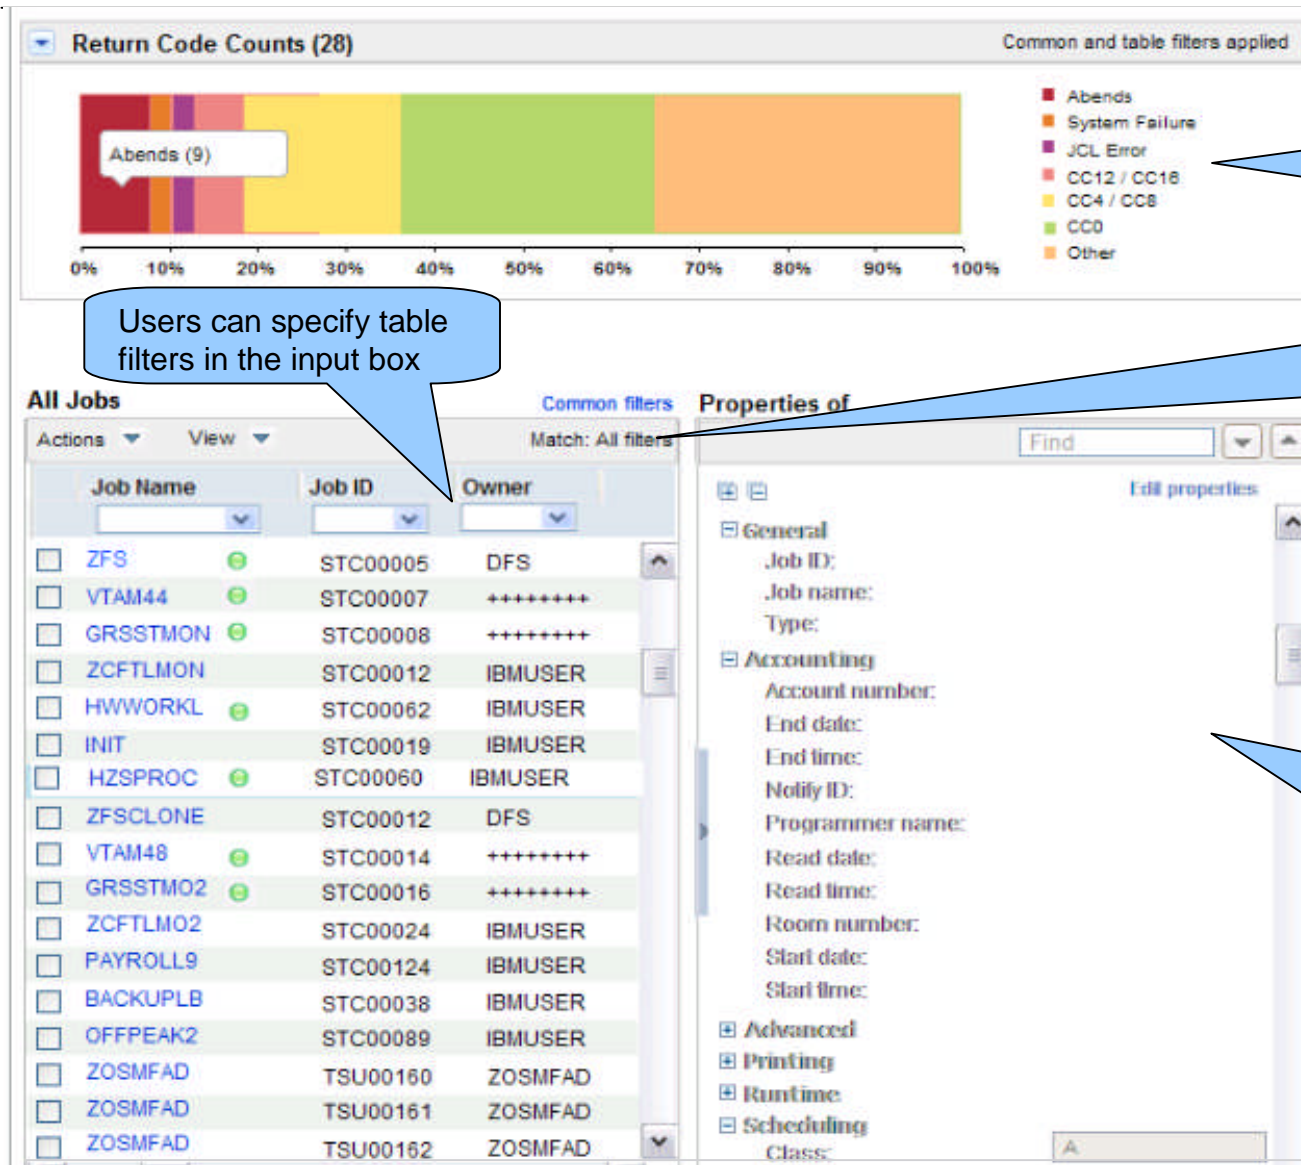

The Job result distribution based on return code. Hover text is provided

Users can specify table filters in the input box

This link brings out **Common Filters** combo box too. The common filter is applied first, and then the table filter is applied.


Job properties are displayed in a collapsible section. When no Jobs are selected, nothing is displayed.

\* available with z/OS V2.1 SDSF PTF UI15294 and z/OSMF V2.1 with PTF UI16044





# z/OS Health Checks View\*

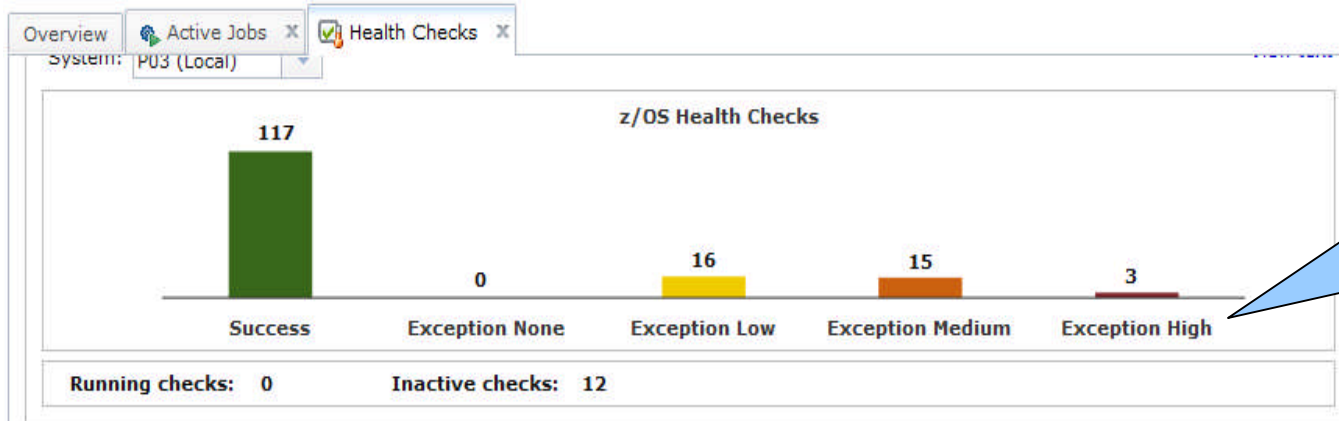

Shows counts for checks by status, with exceptions grouped by severity, followed by counts of running checks and inactive checks.

Health Checks      Common Filters      Properties of ALLOC\_ALLC\_OFFLN\_POLICY

Actions View

NAME	CheckOw	State	Status	Result
<input checked="" type="checkbox"/> ALLOC_ALLC_OFFLN_POLICY	IBMALLOC	ACTIVE	SUCCESSFUL	
<input type="checkbox"/> ALLOC_SPEC_WAIT_POLICY	IBMALLOC	ACTIVE	SUCCESSFUL	
<input type="checkbox"/> ALLOC_TIOT_SIZE	IBMALLOC	ACTIVE	SUCCESSFUL	
<input type="checkbox"/> ASM_LOCAL_SLOT_USAGE	IBMASM	ACTIVE	SUCCESSFUL	
<input type="checkbox"/> ASM_NUMBER_LOCAL_DATA	IBMASM	ACTIVE	SUCCESSFUL	
<input type="checkbox"/> ASM_PAGE_ADD	IBMASM	ACTIVE	SUCCESSFUL	
<input type="checkbox"/> ASM_PLPA_COMMON_SIZE	IBMASM	ACTIVE	EXCEPTION-M	
<input type="checkbox"/> ASM_PLPA_COMMON_USAGE	IBMASM	ACTIVE	SUCCESSFUL	

Total: 761, Selected: 1      Page 1 of 8      Rows 100

Refresh      Last refresh: More than 1 minute ago      Apply      Cancel

Properties are more current than table data.

Type to filter properties

**General**

CheckOwner: IBMALLOC  
Global: NO

NAME: ALLOC\_ALLC\_OFFLN\_POLICY  
Reason: Check ALLC\_OFFLN POLICY  
SevCode: 4  
SysLevel: z/OS 02.01.00 HBB7790  
SysName: P00  
WTOType: INFO

**Advanced**

**Scheduling**





**Status**

To browse a check and see its history, click the check name, or use the **Browse** and **Display History** action. A new tab will popup. Users can perform other operations under **Actions** menu.


\* available with z/OS V2.1 SDSF PTF UI15294 and z/OSMF V2.1 with PTF UI16044



## SDSF –View Restructure \*\*

- Remove the Spool utilization bar and add the value of the bar to the graph footer in text. 
- Regardless of table selection, the More actions item under Actions pull-down will be always enabled so that the user can view SDSF actions without selecting any rows.
- Restructure the table View menu.
  - Filter and sort related actions are separated by groups. 
  - The Filter Match selection is moved to table header. Default value is All Filters. Selection from this menu results in immediate change to the match value and table data. 
  - Export Table Data actions are move to a new table pull-down named File. 

\*\* available for z/OSMF V2.1 with PTF UI90005 and z/OS SDSF PTF UI90004

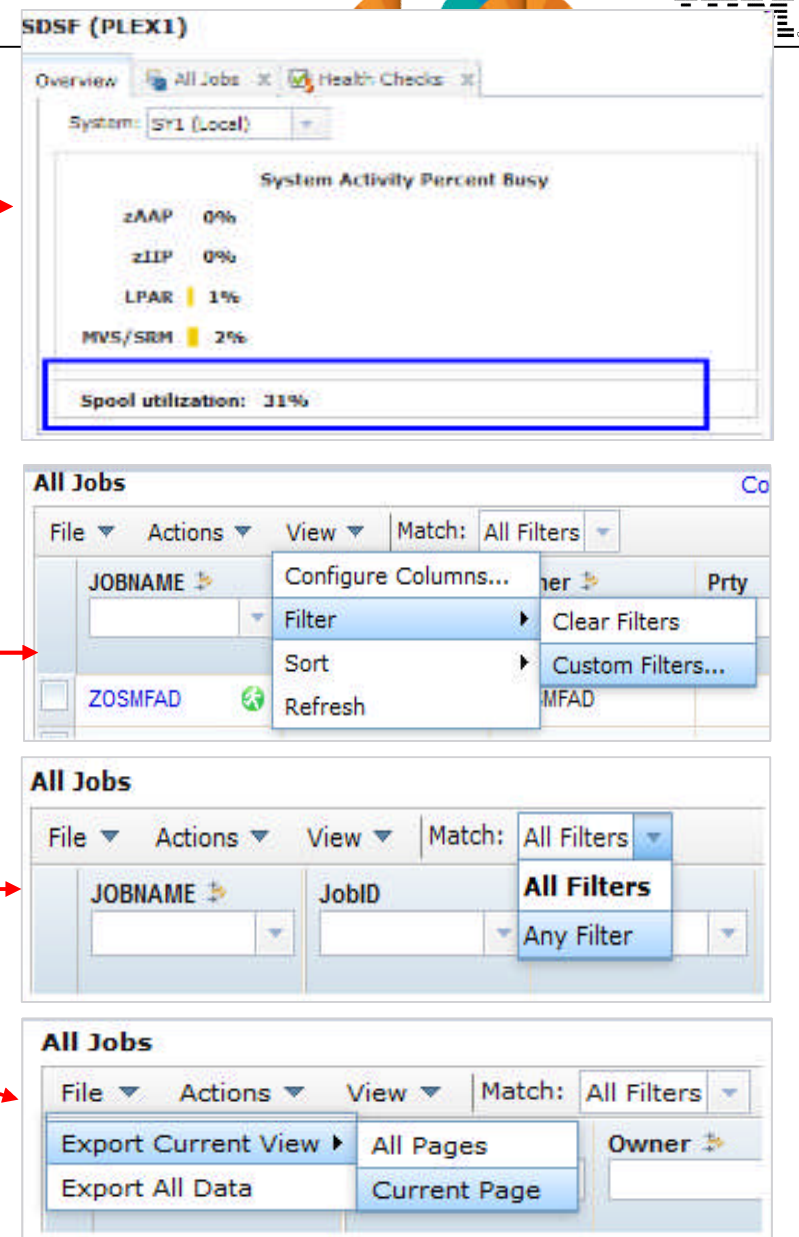

**SDSF (PLEX1)**

Overview | All Jobs | Health Checks

System: S\*1 (Local)

System Activity Percent Busy

zAAP	0%
zIIP	0%
LPAR	1%
MVS/SRM	2%

Spool utilization: 11%

**All Jobs**

File | Actions | View | Match: All Filters

JOBNAME | JobID | Prty

ZOSMFAD

View menu options: Configure Columns..., Filter, Sort, Refresh

Match menu options: Clear Filters, Custom Filters...

**All Jobs**

File | Actions | View | Match: All Filters

JOBNAME | JobID | Prty

ZOSMFAD

Match menu options: All Filters, Any Filter

**All Jobs**

File | Actions | View | Match: All Filters

JOBNAME | JobID | Prty

ZOSMFAD

File menu options: Export Current View, Export All Data

Match menu options: All Pages, Current Page





## SDSF - Property Sheet Usability \*\*

- Persist the real-time property sheet width as part of user customization cross sessions so that the property sheet will always be rendered in user-demanded width.
  - The width percentage is persisted by command, so different views have their own width percentage separately.
- If the property sheet is collapsed (hidden), the UI will suppress the properties loading, which improves the efficiency.

**Active Jobs** Common Filters Properties of HZPENG

Actions ▾ View ▾

JOBNAME	StepName	ProcStep	JobID
DEBUG15	STEP1		S00002
IGVDGNMN	IGVDGNMN	IGVDGNMN	S00002
<input checked="" type="checkbox"/> HZPENG	PROCDB	SP0TC001	T00002
P00SVR2S	P00SVR2S	STEP1	S00002
HZPENG	STEP1		S00012
DEBUG12	*OMVSEX		S00012
DEBUG12	STEP1		S00012

Total: 344, Selected: 1

< Page 1 of 4 > Rows 100 ▾

Properties are more current than table data.



Type to filter properties




- General**
- Advanced**
- Performance**
- Scheduling**
  - C:
  - DP: FF
  - ResGroup: TSOHIGH
  - RptClass:
  - SP: 1
  - SrvClass: TSOHIGH
  - Workload: TSO\_WLD
- Security**
- Status**

\*\* available for z/OSMF V2.1 with PTF UI90005 and z/OS SDSF PTF UI90004



## SDSF – Security \*\*

- New SDSF Settings panel layout. Add security tracing support:
  - Send trace messages to message dialog 
  - Send trace messages to user session log.  [User Session Log](#)
- Give user control to show or hide UI elements including those the user is not authorized to use.
- The UI elements to be shown/hidden are graphic sections in both Overview panel and table views.

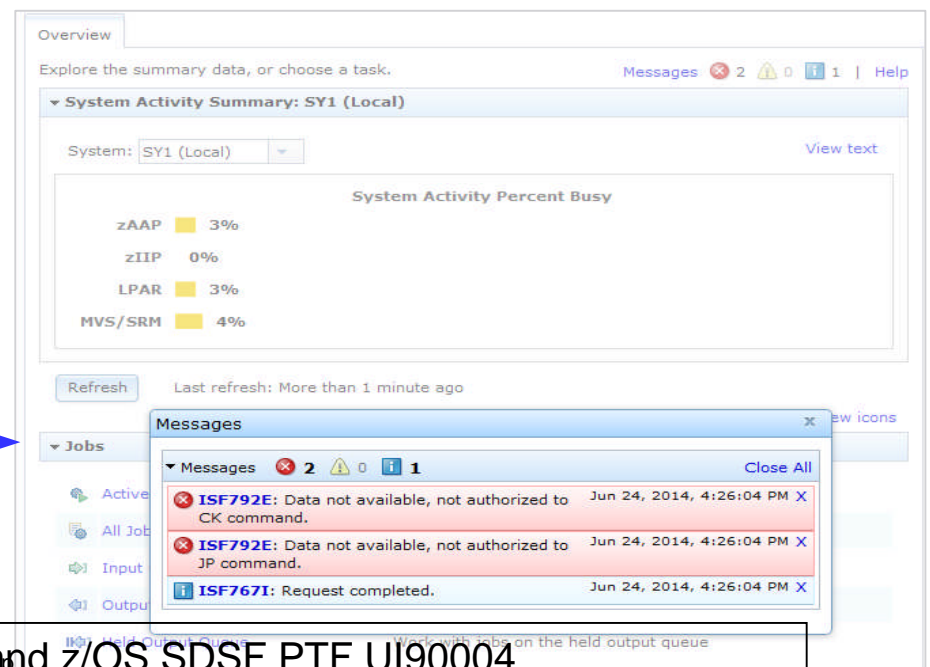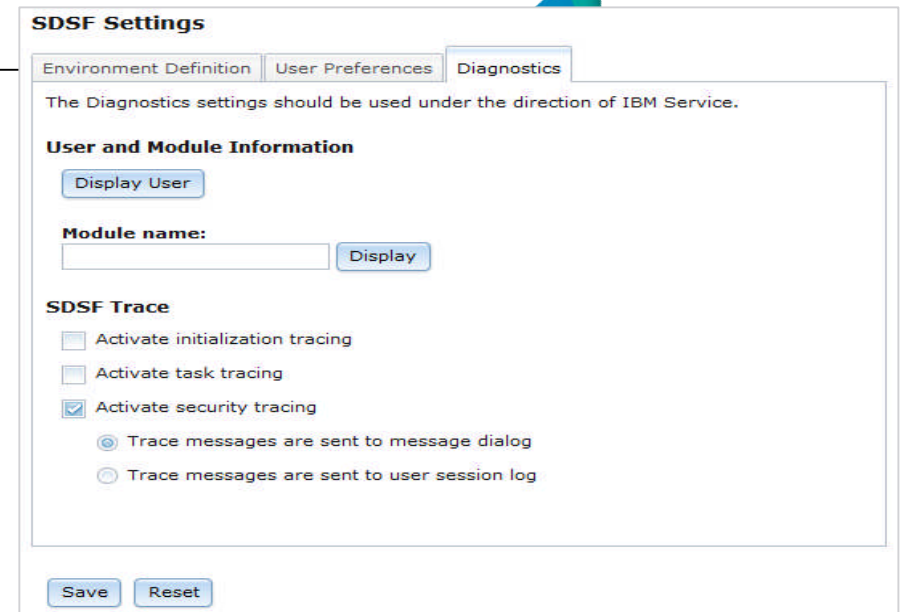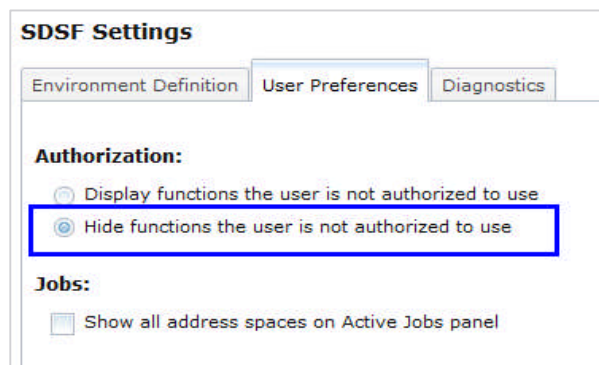


\*\* available for z/OSMF V2.1 with PTF [UI90005](#) and z/OS SDSF PTF [UI90004](#)





# Agenda

- Overview of z/OS Simplification Efforts
  - The z/OS Management Facility (z/OSMF)
- What's New in z/OSMF V2.1
  - Use of the WebSphere Application Server Liberty profile
  - Workflows
  - Support for External Applications



## • **z/OSMF Management Tasks**

- Configuration
  - Performance
  - Problem Determination
  - Software
  - z/OS Classic Interface: ISPF
- Other z/OSMF Capabilities
    - Security
    - Internet and Intranet Links
    - System
    - Programmatic Interface for z/OSMF





## z/OSMF Management Tasks

---

- **Configuration**
  - Configuration Assistant for z/OS Communications Server
- **Performance**
  - Capacity Provisioning
  - Resource Monitoring and System Status
  - Workload Management
- **Problem Determination**
  - Incident Log
- **Software**
  - Management (originally called Deployment)
- **z/OS Classic Interface**
  - ISPF





## z/OSMF Management Tasks

---

- **Configuration**

- ➔ **Configuration Assistant for z/OS Communications Server**

- **Performance**

- Capacity Provisioning
- Resource Monitoring and System Status
- Workload Management

- **Problem Determination**

- Incident Log

- **Software**

- Management (originally called Deployment)

- **z/OS Classic Interface**

- ISPF



# Configuration Assistant for z/OS Communications Server

- **A GUI for the z/OS Communications Server Policy Agent**
  - it simplifies the configuration and setup of TCP/IP policy-based networking functions.
    - Supports the following technologies:
      - Application Transparent TLS (AT-TLS)
      - IP Security (IPSec) including filters and VPNs
      - Network Security Server(NSS)
      - Intrusion Detection Services (IDS)
      - Policy-based Routing (PBR)
      - Quality of Service (QoS)
- Initially available as a Microsoft Windows Web download (since z/OS V1.7)
  - Was provided with z/OSMF (starting with z/OSMF V1.11)
  - z/OS V1.13 was the last release supported by the web download tool.
  - **With z/OS V2.1, users must migrate to z/OSMF**



# Configuration Assistant for z/OS Communications Server



- **Available with z/OSMF V1.11**
  - Configuration files can now be saved to local disk storage that is accessible to your z/OS system where the Configuration Assistant is running so FTP (from Windows) is not required
  - Can also import configuration text files in cases where users have already defined policies and would like to begin using the Configuration Assistant
- **Enhancements in z/OSMF V1.12**
  - Support for Internet Key Exchange (IKE) version 2
  - Support for FIPS-140 cryptographic mode for IPsec and IKE
  - Simpler AT-TLS rules
  - Support the configuration of certificate trust chains and certificate revocation lists.
- **Enhancements in z/OSMF V1.13**
  - Define policies once and use for multiple stacks,
  - Configure networks for both z/OS R12 and R13 mixed environments
  - Import existing stack settings
  - Improved Intrusion Detection function



- **Enhancements in z/OSMF V2.1**

- Provides a modern, intuitive interface that is consistent with other z/OSMF tasks.
  - Exploits the z/OSMF workflow function for setting up Policy agent and other daemons.
- Requires less z/OS CPU usage.
- Allows you to configure z/OS V1.12, V1.13, and V2.1 Communications Server policy based definitions.
- Adds AT-TLS support for the following RFCs:
  - Renegotiation options (RFC 5746)
  - Elliptic Curve Cryptography (RFC 4492 and RFC 5480)
  - TLSv1.2 (RFC 5246)
  - AES GCM Cipher Suites (RFC 5288)
  - Suite B Profile (RFC 5430)
  - ECC and AES GCM with SHA-256/384 (RFC 5289)
- Adds Policy Based Routing (PBR) support for IPv6.



# Configuration Assistant z/OSMF V2.1 Welcome Panel



IBM z/OS Management Facility Welcome user1 Log out IBM.

Welcome x Configuratio... x

**Welcome to V2R1 Configuration Assistant for z/OS Communications Server**  
Use this task to create and manage configuration for z/OS Communications Server policy-based networking functions.

**Select a backing store for configuration:**  
DianeBS\_ATTLS\_FF Open

**Learn more about Configuration Assistant:**

What's New	See what is new in this release.
Getting Started	First time users can learn about Configuration Assistant.
Migrating to z/OSMF	Migrate backing stores from Windows to z/OSMF.
Application Setup Tasks	Workflows to guide the setup of required applications.
Tutorials	Link to tutorials.
FAQs	Link to Frequently Asked Questions.

IBM z/OS Management Facility Welcome user1 Log out IBM.

Welcome x Configuratio... x

Configuration Assistant (Home) » IPsec

**V2R1 Current Backing Store = DianeBS\_ATTLS\_FF**

Select a perspective: IPsec Tools

Systems Traffic Descriptors Security Levels Address Groups Requirement Maps Reusable Rules

Actions

Name	Type	Status	Release	Description
\$AA	Image	Complete	V2R1	
A	Stack	Complete	V2R1	
AAA	Stack	Incomplete	V2R1	
ATTLS	Stack	Incomplete	V2R1	Imported from Policy Data
TCP	Stack	Complete	V2R1	
A12	Image	Complete	V1R12	
A12	Stack	Incomplete	V1R12	
A13	Image	Complete	V1R13	
A13	Stack	Incomplete	V1R13	
IMAGE1	Image	Complete	V2R1	

Total: 19, Selected: 0

Home Save

Main Panel



# Configuration Assistant z/OSMF V2.1 Welcome Panel



Workflows x Configuratio... x

## Welcome to V2R1 Configuration Assistant for z/OS Communications Server

Use this task to create and manage configuration for z/OS Communications Server policy-based networking functions.

### Select a backing store for configuration:

saveData

Open

### Learn more about Configuration Assistant:

What's New	See what is new in this release.
Getting Started	First time users can learn about Configuration Assistant.
Migrating to z/OSMF	Migrate backing stores from Windows to z/OSMF.
Application Setup Tasks	Workflows to guide the setup of required applications.
Tutorials	Link to tutorials.
FAQs	Link to Frequently Asked Questions.

### Create Workflow

Type or select a workflow definition file to use for creating a new workflow.  
For a z/OS data set, specify a fully qualified name, with no quotes.

Workflow definition file:

/usr/lpp/zosmf/V2R1/workflow/plugins/izucb/ezb\_pagent\_setup\_wizard.xml

< Back

Next >

Finish

Cancel

Help

All Configuration Assistant Workflows are in this directory.



# Configuration Assistant z/OSMF V2.1 Workflows



IBM z/OS Management Facility Welcome user1

Workflows

**Workflows**

Simplifies tasks through guided step-based workflows, and provides administrative functions for assigning workflow responsibilities and tracking progress.

1. Use the "Create Workflow" in the Actions menu

Actions

Workflow Name Filter	Description Filter	Version Filter	Vendor Filter	Owner Filter	System Filter	Percent Complete
z/OS Communications Server: Setup to run Traffic Regulation Management Daemon (TRMD) - Workflow_0	z/OS Communications Server: Setup to run Traffic Regulation Management Daemon (TRMD)	1.0	IBM	user1	XESDEV.MVS160 (MVS160_001)	0%
z/OS Communications Server: Setup for Syslogd - Workflow_0	z/OS Communications Server: Syslogd				001)	0%
Setting up to run IP Defensive Filters with Defense Manager Daemon (DMD) - Workflow_0	Setting up to run IP Defensive Filters with Defense Manager Daemon (DMD)				001)	0%
Set up to run Network Security Services (NSS) - Workflow_0	Set up to run Network Security Services (NSS)				001)	0%
z/OS Communications Server: IP Security with IKE - Workflow_0	z/OS Communications Server: IP Security with IKE					11%
z/OS Communications Server: Install Sample Profiles for TCP/IP Components - Workflow_0	z/OS Communications Server: Install Sample Profiles for TCP/IP Components	1.0	IBM	user1	XESDEV.MVS160 (MVS160)	0%
z/OS Communications Server: Setup to run Policy Agent - Workflow_0	z/OS Communications Server: Setup to run Policy Agent	1.0	IBM	user1	XESDEV.MVS160 (MVS160)	0%

Total: 7, Selected: 0

Refresh Last refresh: Aug 9, 2013 9:56:38 AM local time (Aug 9, 2013 1:56:38 PM GMT)

Create Workflow

Type or select a workflow definition file to use for creating a new workflow. For a z/OS data set, specify a fully qualified name, with no quotes.

Workflow definition file:

/usr/lpp/zosmf/V2R1/workflow/plugins/izuca/ezb\_pagent\_setup\_wizard.xml

< Back Next > Finish Cancel Help





## z/OSMF Management Tasks

---

- Configuration
  - Configuration Assistant for z/OS Communications Server
- Performance
- ➔ **Capacity Provisioning**
  - Resource Monitoring and System Status
  - Workload Management
- Problem Determination
  - Incident Log
- Software
  - Management (originally called Deployment)
- z/OS Classic Interface
  - ISPF





# z/OSMF Capacity Provisioning

## Background

- **System z On/Off Capacity on Demand**

Ideal if your business has few periodic workload peaks over the year. Potentially:

- Save on hardware - No need to purchase hardware, 'you rent it' for the days you need it.
- Save on monthly software charges – only pay for software charges for On/Off CoD peak capacity in the month it is incurred\*\*

Also ideal if you own extra hardware capacity (banked capacity). Potentially:

- Save on monthly software charges – budget for peak 'banked' capacity and turn off the resources when not needed to possibly gain software savings.

- **The Capacity Provisioning Manager (CPM) is in the base of z/OS**

- z/OS Capacity Provisioning Manager can automate On/Off CoD for z/OS
  - Can manage processing capacity more reliably, more easily, and faster.
  - What had taken minutes or hours to discover, identify, decide, and resolve, now can be specified to happen automatically in as little as two minutes.

- **The Capacity Provisioning Control Center (CPCC) is the user GUI to CPM used for administering the Capacity Provisioning policies**

- Available as a separate Windows-based stand-alone client.





# z/OSMF Capacity Provisioning

- **z/OSMF Capacity Provisioning task**
  - Simplifies the **monitoring** of z/OS CP connections, domains, configurations, and policies
  - Initially a separate Windows-based tool required for z/OS CP **management** functions.
    - With z/OSMF APAR PM74519 the z/OSMF Capacity Provisioning application is enhanced to allow you to create, edit, and activate domain configurations and capacity provisioning policies.
      - With these new functions z/OSMF Capacity Provisioning supports all the functions available in the Microsoft Windows-based Capacity Provisioning Control Center (CPCC).
    - **z/OS V1.13 was the last release supported by Microsoft Windows-based CPCC.**
      - With z/OS V2.1, users must migrate to z/OSMF
- **z/OSMF Capacity Provisioning task (z/OSMF V2.1)**
  - Support is provided for Defined Capacity and Group Capacity.





# z/OSMF Capacity Provisioning

Manage CIM connections to access a Provisioning Managers

## Provisioning Manager

The Provisioning Manager is the component of Capacity Provisioning that controls the domain based on the active policy. Connections describe how to connect to a Provisioning Manager. The connections table shows connection definitions.

Host Address	Protocol	Port
Filter	Filter	Filter
<input type="checkbox"/> Same system as z/OSMF		
<input type="checkbox"/> cpmprod.ibm.com	HTTPS	5989
<input type="checkbox"/> cpmtest.ibm.com	HTTP	5988

View detailed status about a domain  
Quick switch between reports for same domain

Provisioning Manager > Domain Status

## Domain Status for Domain GUI2

This page shows information about the current state of the Provisioning Manager and the domain that it manages. All timestamps below are shown in GMT.

Domain name: GUI2  
 Start time: Feb 1, 2011 8:42:53 AM  
 Processing mode: Autonomic  
 Processing mode activation time: Nov 15, 2010 9:23:12 AM  
 Configuration name: TC067#1  
 Configuration activation time: Jan 25, 2011 10:45:11 AM  
 Policy name: TC057#1T  
 Policy activation time: Jan 21, 2011 4:14:49 PM

View information about the active configuration for a domain  
•Drill down to CPC or system

Provisioning Manager > Active Configuration

## Active Configuration for Domain GUI2

This page shows information about the active domain configuration and the status of its CPCs and z/OS systems.

Active configuration: TC067#1 Status: ☒ Enabled

CPCs Systems

CPC name	Correlation status	Record ID	Active MSU	Active zAAPs	Active zIIPs	Enabled	Enabled default
Filter	Filter	Filter	Filter	Filter	Filter	Filter	Filter
<input type="radio"/> R35	Matched	34937149	1140	2	1	<input checked="" type="checkbox"/> Enabled	<input checked="" type="checkbox"/> Enabled
<input type="radio"/> ECL2	Matched	34937149				<input checked="" type="checkbox"/> Enabled	<input checked="" type="checkbox"/> Enabled

View information about the active policy for a domain  
Drill down to policy element

Provisioning Manager > Active Policy

## Active Policy for Domain GUI2

This page shows information about the active policy. All timestamps below are shown in GMT.

Active policy: TC057#1T Status: ☒ Enabled

Actions Table view: Tree


Type	Name	Current status	Details
Filter	Filter	Filter	Filter
<input type="radio"/> Policy	TC057#1T	<input checked="" type="checkbox"/> Enabled	
<input type="radio"/> Logical processor scope			
<input type="radio"/> Processor limit	PLEX1.SYS1		CP limit: Max. possible; zAAP limit: 0
<input type="radio"/> Max. provisioning scope			
<input type="radio"/> Processor limit	CPC1		MSU limit: 0; zAAP limit: 0; zIIP limit: 0





## z/OSMF Management Tasks

---

- Configuration
  - Configuration Assistant for z/OS Communications Server
- **Performance**
  - Capacity Provisioning
  -  – **Resource Monitoring and System Status**
  - Workload Management
- Problem Determination
  - Incident Log
- Software
  - Management (originally called Deployment)
- z/OS Classic Interface
  - ISPF





## z/OSMF Resource Monitoring

- The z/OSMF Resource Monitoring application provides integrated performance monitoring in the customer's environment
- Supports z/OS sysplexes and Linux images (System z and Intel) in your installation
  - Requires the RMF z/OS Data server (DDS) on each sysplex being monitored and the Linux data gatherer (rmfpms) running on the Linux image that is being monitored.
- There are two z/OSMF tasks: *Resource Monitoring and System Status*
  - Resource Monitoring task:
    - Monitor most of the metrics supported by the Resource Measurement Facility (RMF) Monitor III
    - Create and save custom views of the metrics easily, and
    - Display real-time performance data as bar charts.
      - Predefined views provided for a quick start.
      - Advanced filtering features for focused monitoring
  - System Status task:
    - Quickly Assess the performance of the workloads running on the z/OS sysplexes in your environment.
    - The System Status task also provides a single location where you can define the z/OS sysplexes and Linux images to be monitored in the Monitoring Desktops task.



## z/OSMF Resource Monitoring

- **Enhancements in z/OSMF V1.13**
- With z/OS V1.13, RMF has new CIM-based performance data gatherers for Linux on System z, Linux on System x, and AIX systems to provide a consistent monitoring solution for zEnterprise ensembles.
  - Application Linking between Resource Monitoring and WLM
- **Enhancements in z/OSMF 2.1**
  - The data gatherers for Windows system complexes (System x) are also integrated into z/OSMF to give you the ability to monitor those resources.
  - System Status expands the scope of monitoring to include Windows system complexes in your enterprise
  - Retrieve Historical Data\*
    - New feature can retrieve historical performance data from Resource Monitoring DDS before a RM dashboard was started.
  - Export data collected in monitoring dashboards\*

\* available for z/OSMF V2.1 with PTF UI16044 and its requisite PTFs



# Resource Monitoring : System Status



Firefox

IBM z/OS Management Facility

IBM z/OS Management Facility Welcome jbau Log out IBM

Welcome  
 Configuration  
 Links  
 Performance  
   Capacity Provisioning  
   Resource Monitoring  
   System Status  
   Workload Management  
 Problem Determination  
 Software  
 z/OS Classic Interfaces  
 z/OSMF Administration  
 Refresh

Welcome System Status

### System Status

Use this page to quickly assess the performance of the workloads running on the sysplexes in your installation. You can also use this page to define the target systems for the sysplexes and AIX or Linux system complexes that you want to monitor in the Resource Monitoring task.

Resources

Actions

Resource	Connectivity	Performance Index Status	Related Service Definition	Active WLM Policy
<input type="radio"/> LOCALPLEX	Connected	✓ PI ≤ 1 for all periods	WLMPROD	DSHIFT
<input type="radio"/> PLEX2	Connected	⚠ PI > 1 for unimportant periods	SRVDEF	POL42
<input type="radio"/> PLEX3	Connected	✗ PI > 1 for important periods	PL3PROD	PROD
<input type="radio"/> AIX	Connected			

Total: 4

Refresh Last refresh: Jun 12, 2012 5:20:39 PM local time (Jun 12, 2012 3:20:39 PM GMT)

☐ Automatic refresh

A snapshot of the performance of workloads running on your sysplexes. The System Status task also provides a single location where you can define sysplexes and Linux images to be monitored.

Why is this status red? Drill down into the details with the Resource Monitoring task.



# Resource Monitoring: Monitoring Dashboards

Enterprise2014



IBM

**IBM z/OS Management Facility** Welcome zosmfad Log out IBM

Welcome x Resource Mon... x

**Resource Monitoring**

Dashboards

**Dashboards**

Filter

- Common Storage Activity
- Coupling Facility Overview
- Execution Velocity
- General Activity
- Overall Image Activity
- Performance Index
- Response Time
- Using & Delays
- XCF Activity

Click to open the dashboard

Pre-loaded with standard metrics. Can be customized, can add your own.

Monitor most of the metrics supported by the Resource Measurement Facility (RMF™) Monitor III, create and save custom views of the metrics, and display real-time performance data as bar charts.

**Resource Monitoring**

Dashboards XCF Activity Response Time General Activity Coupling Facility Overview

XCF Activity (Running)

Start Pause Save Actions

**Groups**

Group	Signal Count
SYSWLM	408
BOEZMF1	400
ISTXCF	313

**Members**

Member	Signal Count
SYSWLM-ALL	408
BOEZMF1-ALL	400
ISTXCF-ALL	313

**Systems (Outbound)**

System	Signal Count
ZMF2:ZMF5-SA4028	42
ZMF2:ZMF1-SA4028	42
ZMF2:ZMF3-SA4028	41
ZMF5:ZMF1-SA4028	41

**Systems (Inbound)**

System	Signal Count
ZMF3:ZMF5	66
ZMF3:ZMF2	62
ZMF2:ZMF1	62
ZMF3:ZMF1	61
ZMF1:ZMF4	61
ZMF5:ZMF2	60

Total: 9, Selected: 0

Refresh Last refresh: Jan 23, 2013 4:19:25 PM local time (Jan 23, 2013 5:00:00 PM local time)



# Application Linking: Resource Monitoring to WLM

The screenshot illustrates the workflow for monitoring resources and linking them to Workload Management (WLM) in the IBM Enterprise 2014 environment. It shows three overlapping windows:

- System Status Window:** Displays a table of resources. The 'LOCALPLEX' resource is selected, and a context menu is open with the 'View' option highlighted.
 

Resource	System Type	Connectivity	Performance Index Status	Related Service Definition	Active WLM Policy
LOCALPLEX	z/OS	Connected	⚠️ PI > 1 for unimportant periods	DEFAULT	STANDARD
SCLIMPLEX		Connected	✅ PI <= 1 for all periods	Default	STANDARD
SYSPLEX			✅ PI <= 1 for all periods	SYSTEM2	STANDARD
RDPLEX	z/OS				
- Workload Management Window (Overview):** Shows the 'WLM Status' tab for the selected resource.
- Workload Management Window (WLM Status):** Provides detailed information for 'Sysplex ZMF1PLEX from System ZMF2'.
 

WLM Status for Sysplex ZMF1PLEX from System ZMF2	
<b>Active Service Policy</b> (View performance of active policy)	
Name:	STANDARD
Description:	DB default policy 1
Activated:	Jan 29, 2013 3:14:59 PM GMT
Activated by:	jbaui from system ZMF2
Related service definition:	DEFAULT
Functionality level:	4
Installed:	Jan 29, 2013 3:14:59 PM GMT
Installed by:	jbaui from system ZMF2


An orange arrow indicates the navigation path from the 'View' option in the 'System Status' window to the 'WLM Status' window.



# Resource Monitoring: Monitoring Dashboards



One Dashboard  
for the  
Enterprise

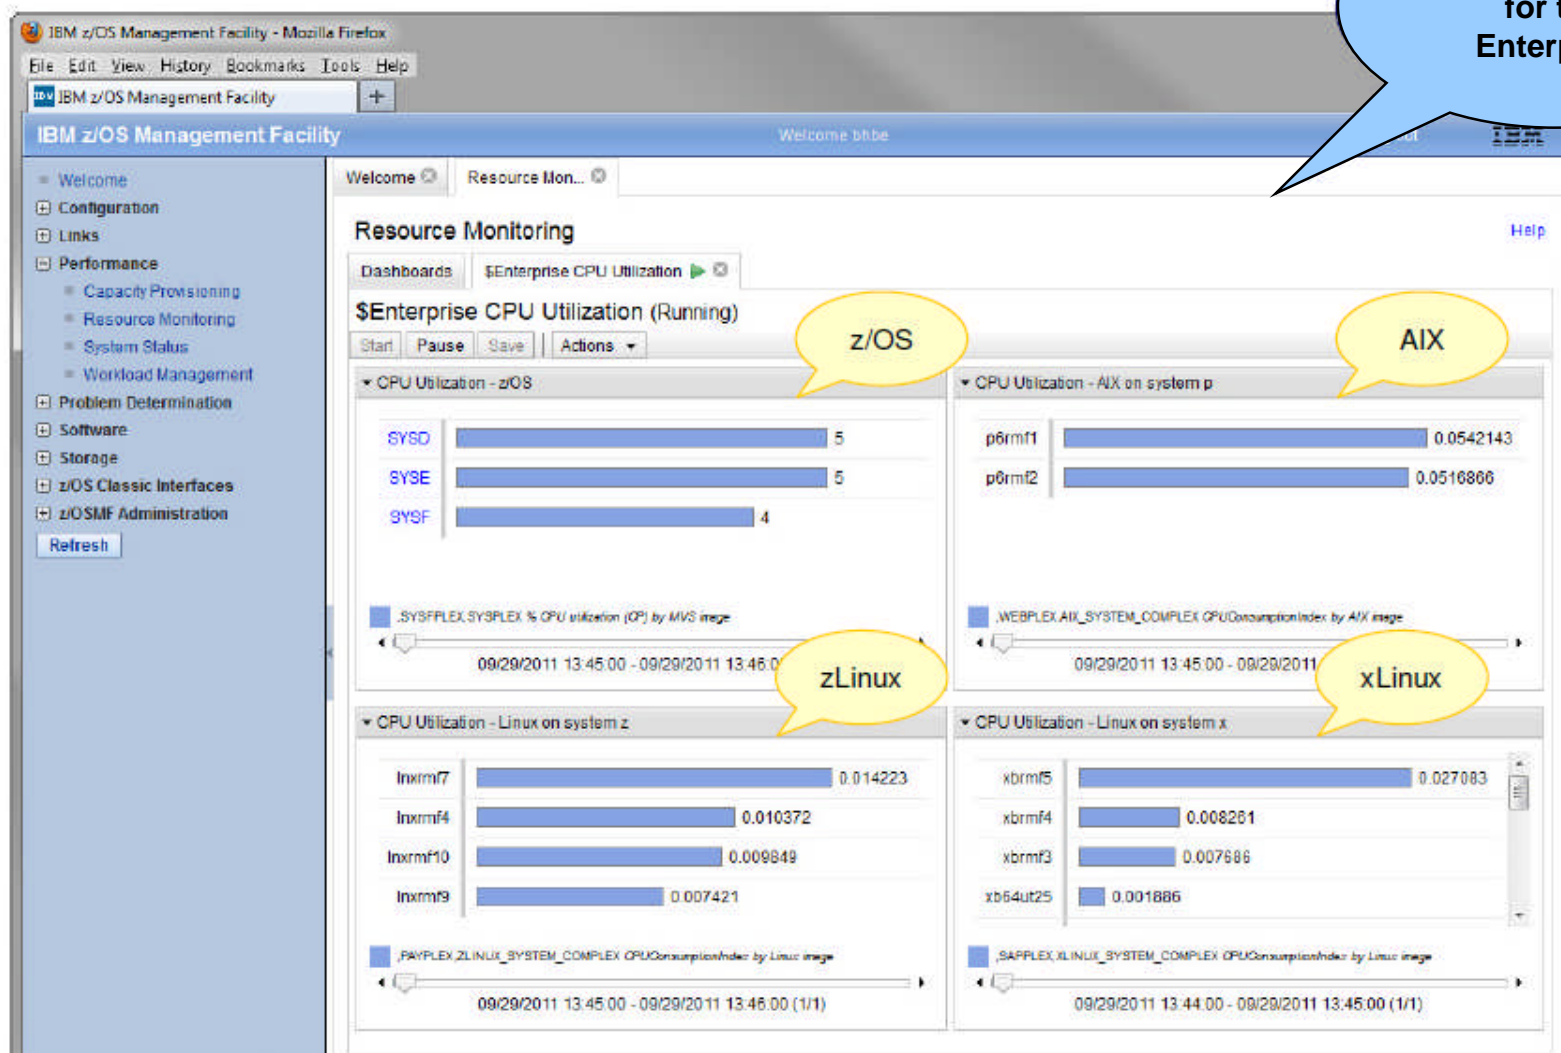





# Retrieve Historical Data\*

Two New Options

Resource Monitoring Monitor III interval

\* available for z/OSMF V2.1 with PTF UI16044 and its requisite PTFs



## Resource Monitoring – Spreadsheet Export (1)\* IBM

- In Resource Monitoring task, Open a dashboard, click “Actions -> Export” can bring up Export Wizard.
- User can choose a metric group or the entire dashboard, and select a range of intervals to export. Specific metrics and resources can also be sorted out.

**General Activity** ▶ Export Dashboard

**Export Dashboard**

➔ **Step1: Select Scope and Intervals**

✓ Step2: Select Metrics and Resources

Select the scope and interval range of the data to export in CSV format.

**Scope of Data to Export**

☒ Metric group:  
Users

☐ Include all metrics and resources

☒ Include a selection of metrics and resources

☐ Entire dashboard with all metrics and resources

**Range of Intervals to Export**

Start time of first interval:  
01/09/2014 03:07:00

End time of last interval:  
01/09/2014 03:09:00

< Back Next > Finish Cancel

**General Activity** ▶ Export Dashboard

**Export Dashboard**

✓ Step1: Select Scope and Intervals

➔ **Step2: Select Metrics and Resources**

Select the metrics and resources to include

Metric group to export: Users

**Metrics:**

[?], SYSPLEX # users by MVS image

[?], SYSPLEX # active users by MVS image

**Resources:**

P00

P02

P03

< Back Next > Finish Cancel


\* available for z/OSMF V2.1 with PTF UI16044 and its requisite PTFs



## Resource Monitoring – Spreadsheet Export (2)\* IBM

- One CSV file is created for each metric group in the dashboard. Multiple metric groups data will generate a compressed zip file.
- If the CSV file covers multiple metrics and resources (list value), the resulting table sorts the table columns: 1) by metric and 2) by resource.
- The user can view the performance data in table/chart and analyze

z/OSMF Resource Monitoring					
Exported:	2013/10/24 11:02:38				
Dashboard:	Coupling Facility Overview				
Metric group	Requests-POKDDS				
Metric:	[,?],SYSPLEX total request[,?],SYSPLEX % total physical utilization (AAP) by partition				
Resource:	CF02	CF01	4255.VMC	4255.VMA	
Date	Time				
2013/10/24	4:43:00	53.8	33.3	0.2	0.1
2013/10/24	4:44:00	56.8	32.3	0.2	0
2013/10/24	4:45:00	53.3	32.6	0.2	0.1
2013/10/24	4:46:00	53.3	32.6	0.2	0.2
2013/10/24	4:47:00	52.9	33	0.2	0.1
2013/10/24	4:48:00	53.2	32.6	0.2	0.1
2013/10/24	4:49:00	52.9	32	0.2	0.1
2013/10/24	4:50:00	53.2	32.6	0.2	0.1
2013/10/24	4:51:00	54	32.8	0.2	0.1
2013/10/24	4:52:00	54.1	33.2	0.2	0.1

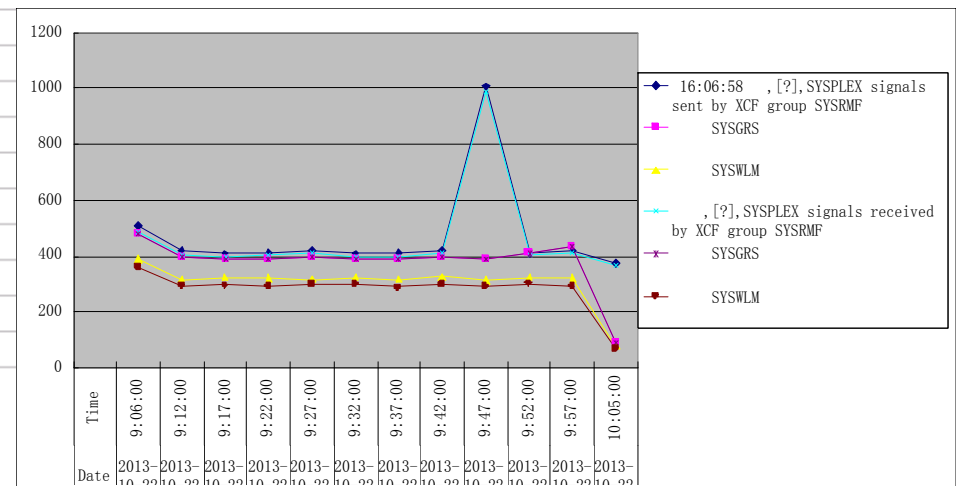


\* available for z/OSMF V2.1 with PTF UI16044 and its requisite PTFs






## z/OSMF Management Tasks

---

- Configuration
  - Configuration Assistant for z/OS Communications Server
- **Performance**
  - Capacity Provisioning
  - Resource Monitoring and System Status
-  • **Workload Management**
  - Problem Determination
    - Incident Log
  - Software
    - Management (originally called Deployment)
  - z/OS Classic Interface
    - ISPF





# z/OSMF Workload Management

- WLM Policy Editor available on the z/OS Management Facility provides
  - All the same functions as in the 'as is' Web-download tool and many new features
  - Direct access to the WLM Couple Data Set to install/extract service definitions. No need to FTP WLM policy files!
  - Activation of service policies and monitoring of the WLM status in the sysplex
  - Enables you to manage WLM service definitions

**IBM z/OS Management Facility** Welcome zosmfad Log out IBM

**Workload Management**

Overview Service Definitions **Store all service definitions in one repository**

**Service Definitions**

Name	Description	Activity	Sysplex	Messages	Last Modified (GMT)	Modified By
SHARPLE1	WLM Policy for SHARE System old			Warning	May 9, 2012 8:47:00 AM	zosmfad
SHARPLE0	WLM Policy for SHARE System old			Warning	Jan 30, 2012 7:21:15 PM	zosmfad
SHARPLEX	WLM Policy for SHARE System			Warning	May 3, 2006 1:33:28 PM	hackett
WLMPROD01 (installed & active)	Production policy-01		SHARPLEX	Information	May 24, 2012 1:25:12 PM	mfusr01
WLMPROD	Production policy			Warning	Oct 4, 2011 7:56:00 PM	mfusr19
WLMTEST	Test policy			Information	Feb 3, 2011 12:17:57 PM	stwirag

**Click to view, edit, print, install a service definition**

**Messages based on built in best practice checks**

Total: 6, Selected: 0  
Refresh Last refresh: Jun 2, 2012 11:37:29 AM local time (Jun 2, 2012 3:37:29 PM GMT)





# z/OSMF Workload Management functions

- Integrates repository to store service definitions
- Import and export of service definitions in XML format
- Printing of service definitions
- Creation, editing, reviewing of service definitions in tabular format
- Direct navigation between policy elements during editing/viewing of service definitions
- Best-practice checking for service definitions
- Supports the installation of service definitions and the activation of service policies
- Displays WLM status of systems in sysplex
- Different authorization levels for viewing, modifying and installing service definition

Facility Welcome zosmfad Log out IBM

Welcome Workload Man...

## Workload Management

Overview Service Definitions

### Service Definitions

Name	Sysplex	Messages	Last Modified (GMT)	Modified By
SHARPLE	Filter	Warning	May 9, 2012 8:47:00 AM	zosmfad
SHARPLE		Warning	Jan 30, 2012 7:21:15 PM	zosmfad
SHARPLE		Warning	May 3, 2006 1:33:28 PM	hackett
WLMPROD	SHARPLEX	Information	May 24, 2012 1:25:12 PM	mfusr01
WLMPROD		Warning	Oct 4, 2011 7:56:00 PM	mfusr19
WLMTEST		Information	Feb 3, 2011 12:17:57 PM	stwirag

AM local time (Jun 2, 2012 3:37:29 PM GMT)



## **z/OSMF Workload Management**

- **Enhancements in z/OSMF V1.13**
  - Persists user settings.
  - Supports different authorization levels.
  - Allows you to view details about the performance of your active service policy, service classes, workloads, and so on.
  - Allows you to activate a service policy when viewing or modifying a service definition.
  - Application Linking between WLM and Resource Monitoring
- **Enhancements in z/OSMF V2.1**
  - Supports service definition functionality level LEVEL029
  - Support the addition of comments to the service definition history\*

\* available for z/OSMF V2.1 with PTF UI16044 and its requisite PTFs



# Application Linking: WLM to Resource Monitoring

The screenshot displays the IBM Workload Management (WLM) console interface. At the top, there are tabs for 'Welcome', 'Workload Man...', 'System Status', and 'Resource Mon...'. The main section is titled 'Workload Management' and includes sub-tabs for 'Overview', 'WLM Status', and 'Modify DEFAULT'. A status message indicates 'This service definition is installed and policy STANDARD is active'. Below this, the 'Workloads' section features a table with columns: Name, Messages, Last Modified (GMT), and Modified By. A context menu is open over the 'TSO' workload, showing options like 'Cut to Clipboard', 'Copy to Clipboard', 'Delete...', 'View Cross References', 'View Messages', 'View Performance of Selected', 'NEW...', 'Paste', 'View Performance of All', 'Select All', 'Deselect All', 'Configure Columns...', 'Modify Filters...', 'Hide Filter Row', 'Clear Filters', 'Modify Sort...', 'Clear Sorts', and 'Clear Search'. The 'TSO' workload is selected in the table.

Name	Messages	Last Modified (GMT)	Modified By
* APPC		Mar 30, 2011 2:31:17 PM	debug1
* BATCH		Oct 16, 1998 11:58:18 AM	tage
* CICS		Oct 16, 1998 11:58:30 AM	tage
* OMVS		Oct 16, 1998 12:01:03 PM	tage
* STC		Oct 16, 1998 12:01:45 PM	tage
* TSO		Oct 16, 1998 12:01:52 PM	tage

Total: 6, Selected: 1

Buttons: Reapply Filter and Sort, OK, Apply, Reset, Cancel



# Workload Management – Add Comments\*

Enterprise2014



IBM

- When users create, modify, import, export, install and activate service policy, they can add comments to describe the intention of each action.
- Comments are saved along with each action in history data, and the user can also add comments to specific history record later.

**Workload Management** [Help](#)

Overview Service Definitions **New Service Definition**

**Service Definition Details**

To define a complete service definition, you must name the service definition and define at least one workload and one service class. To move between items within the service definition, use the *Switch To* dropdown.

\* **Service definition name:**

**Description:**

**Functionality level:** 008

**Service Coefficients**

- \* Central processing unit (CPU)
- \* Input and output channel (I/O)
- \* Main storage occupancy (MSO)
- \* Service request block (SRB)

**Comments**

Comments for action:

\* **Comments (Maximum 500 characters, currently 0 characters)**

Enter comments about modifying this service definition. This comment will be added to the history for the service definition.

**Service Options**


\* available for z/OSMF V2.1 with PTF UI16044 and its requisite PTFs





## z/OSMF Management Tasks

---

- Configuration
  - Configuration Assistant for z/OS Communications Server
- Performance
  - Capacity Provisioning
  - Resource Monitoring and System Status
  - Workload Management
- **Problem Determination**
  -  – **Incident Log**
- Software
  - Management (originally called Deployment)
- z/OS Classic Interface
  - ISPF



- **Auto-capture basic diagnostic materials, triggered when the dump is written to a data set**
  - Diagnostic data “snapshots” for transient data: Snapshots of 30 min OPERLOG or SYSLOG, 1 hr LOGREC detail, and 4-hour LOGREC summary
    - Incident Log will also support the creation of diagnostic log snapshots based on the SYSLOG and LOGREC data sets, as well as the OPERLOG and LOGREC sysplex log streams
  - View, sort, and act on abend related incidents (identified by subsystem)
  - Package dump and log data for transmission in minutes



## z/OSMF Problem Determination

- Enhancements in z/OSMF V1.12
  - Add additional comments and diagnostic data
  - Encrypted parallel FTP of the incident files, to IBM .
    - Download from <http://www14.software.ibm.com/webapp/set2/sas/f/zaid/pdof.html>
  - Sending additional user-defined data with an incident
- Enhancements in z/OSMF V1.13
  - APAR search terms displayed
  - View error log (LOGREC) or operations log (SYSLOG) via ISPF application link
  - Utilizes new Problem Documentation Upload utility in base of z/OS V1.13
  - Handle migrated datasets (PTFs for APARs PM46302 and OA37149)
  - Manage the deletion of incidents using a batch job (CEATool) (PTFs for APARs OA38812 and UA65835)
- Enhancements in z/OSMF V2.1
  - Increased the allowable length of the high-level qualifier for log snapshot data sets from four- to eight-characters\*
  - Support a total of 256 characters for the FTP server host, FTP server port, and FTP.DATA file name when using the z/OS Problem Documentation Upload Utility (PDUU) transfer method.\*
  - Enhance Incident Log to provide support for the use of SSH File Transfer Protocol (SFTP) for sending dumps and logs to IBM or another vendor.\*\*

\* available for z/OSMF V2.1 with PTF UI16044 and its requisite PTFs

\*\* available for z/OSMF V2.1 with PTF UI90005 and its requisite PTFs





# Incident Log – Manage Incidents

IBM z/OS Management Facility Welcome zosmfad Log out IBM

Welcome Incident Log Help

**Incident Log**

Match: All filters

Incident Type	Description	Date and Time (GMT)	System	Problem Number	Tracking ID	Notes	Release	Product	Component Name	Component ID
ABEND S0EC3	COMPON=WEBSPPHRE Z/OS, COMPID=5655N0200,ISSUER=BBORAD MP,ABEND IN PC ROUTINE BB000UTP	Jan 17, 2013 2:54:15 AM	S1				V1R13			5655N0200
ABEND S00D6	COMPON=WEBSPPHRE Z/OS, COMPID=5655N0200,ISSUER=BBORLEX T,ABEND IN (MODULE NAME NOT KNOWN)	Jan 11, 2013 2:13:53 PM	S1	1234,123,123			V1R13			5655N0200
ABEND S0EC3	COMPON=WEBSPPHRE Z/OS, COMPID=5655N0200,ISSUER=BBORLEX T,ABEND IN (MODULE NAME NOT KNOWN)	Jan 11, 2013 2:13:53 PM	S1				V1R13			5655N0200
ABEND S00C1	ZTT TIENDUMP SVCDUMP DUMP FOR PROBLEM # 1,CAT=300DC7F8,JOB#=01000002	Jan 10, 2013 3:27:51 PM	S1				V1R13			
ABEND S00C1	ZTT TIENDUMP SVCDUMP DUMP FOR PROBLEM # 1,CAT=300DC7F8,JOB#=01000001	Jan 10, 2013 3:27:02 PM	S1				V1R13			

Total: 14, Filtered: 5, Selected: 1

Refresh Last refresh: Jan 23, 2013 4:44:43 PM local time (Jan 23, 2013 9:44:43 PM GMT)

**Select incident, get popup with actions**

- Set Tracking ID...
- Set Problem Number...
- Add Notes...
- Delete Incident...
- Send Diagnostic Data...
- View Diagnostic Details
- FTP Job Status
- Allow Next Dump...





# Incident Log – Incident Details

IBM z/OS Management Facility Welcome zosmfad Log out IBM

Welcome x Incident Log x

Incident Log > View Diagnostic Details

**View Diagnostic Details**

General Diagnostic Data

Incident type: ABEND  
 Incident description: COMPON=WEBSPPHRE Z/OS, COMPID=5655N0200,ISSUER=BBORADMP,ABEND IN PC ROUTINE BBOOOUTP  
 Date and time (GMT): Jan 17, 2013 2:54:15 AM  
 Sysplex name: SHARPLEX  
 System name: S1  
 Problem number:  ☐ Identify the problem number as an IBM P...  
 Tracking ID:   
 Component name:  
 Component ID: 5655N0200  
 z/OS release: V1R13  
 Product:  
 Abend code: S0EC3  
 Reason code: 04130007  
 CSECT: BBOOOUTP  
 Load module: BBOOPCRT  
 Symptom string: MOD/BBOOPCRT CSECT/BBOOOUTP PIDS/5655N0200 AB/S0EC3 REXN/B  
 SUB1/SR#OUTBOUND#PC#ROUTINE  
 APAR search terms: BBOOOUTP ABENDEC3 RSN04130007 5655N0200  
 APAR release of z/OS: R780  
 Notes:

OK Apply Cancel

Tab shows lists of data  
(logrec and error log)

Set Tracking ID...  
 Set Problem Number...  
 Delete Incident...  
 Send Diagnostic Data...  
 View Diagnostic Details  
 FTP Job Status  
 Allow Next Dump...

Welcome debug13 Log out IBM

Welcome x Links x Incident Log x Workload Man... Configuratio... x

Incident Log > View Diagnostic Details

**View Diagnostic Details**

General Diagnostic Data

Data Type	Source	Sysplex	System
<input type="checkbox"/> SVC dump	ZMFDUMP.DYNZOS12.P03.D100114.T153115.SV000	SVPLEX0	P03
<input type="checkbox"/> Error log	CEA.L00.C56360D8.A3D56F9E	SVPLEX0	P03
<input type="checkbox"/> Operations log	CEA.O00.C56360D8.A3D56F9E	SVPLEX0	P03

Total: 3, Selected: 0

**Attachments**

To send additional information that you think is relevant for this incident, such as a trace, use the **New...** action in the following table to specify the files to send. You can attach up to five additional files per send. The information about the attachments is discarded when you close the panel.

New...

Data Type	Source
There is no data to display.	

Total: 0, Selected: 0

Send View Status

OK Apply Cancel

Attach user defined  
diagnostic data

- View logs directly
- 8 char HLQ support for log snapshots
- Delete incidents via GUI or batch CEATool



# Incident Log – Send Diagnostic Data

Enterprise2014



IBM

IBM z/OS Management Facility

Welcome zmfusr1

Log out

IBM

Welcome Incident Log

Incident Log > Send Diagnostic Data

Send Diagnostic Data

Use this wizard to prepare and send diagnostic data to a predefined FTP destination.

Review the selected diagnostic data and enter a problem number. If the data to send is incorrect, click **Cancel** to exit the wizard. To select the data you want to send, use the Incident Log or View Diagnostic Details panel.

Incident	Description	Date and Time (GMT)
ABEND S0EC3	COMPON=WEBSPPHRE Z/OS, COMPID=5655N0200,ISSUER=BBORLEXT,ABEND IN (MODULE NAME NOT KNOWN)	Aug 4, 2009 9:26:29 PM

Data Type	Sysplex	System
SVC dump	CFCIMGNE	DCEIMGNE
Error log	CFCIMGNE	DCEIMGNE
Operations log	CFCIMGNE	DCEIMGNE
Error log summary	CFCIMGNE	DCEIMGNE

\* Problem number:  
12345,999,999 ☒ If the problem number is an IBM PMR number, check this box to verify the syntax.

< Back Next > Finish Cancel

Done

dceimgne.pdl.pok.ibm.com:32208

Set Tracking ID...  
Set Problem Number...  
Delete Incident...  
Send Diagnostic Data...  
View Diagnostic Details  
FTP Job Status  
Allow Next Dump...

Wizard guides you through







## Incident Log – SFTP Support \*\*

- Incident Log provides new functionality to support openSSH based SFTP tool. It includes both the SFTP client and server of the IBM USS Ported Tools and other openSSH based 3rd party tools.
- New IBM default SFTP server
  - Americas: *IBM-testcase-mvs-sftp* and *IBM-testcase-tivoli-sftp*.
  - Asia Pacific/Europe: *IBM-ecurep-mvs-sftp* and *IBM-ecurep-tivoli-sftp*.
- Incident Log allows customers to do SFTP authentication with server by public key or by user/password.
  - The user name is required when SFTP is used, but the password is optional.
    - If the password is specified, the user/password authentication will be used, otherwise, the public key authentication is used.
- z/OSMF omits the password when authenticating with the IBM-ecurep SFTP servers because these servers do not support password authentication.
  - For other SFTP servers that do not support password authentication, you must select the Specify a user ID and password option and leave the Password field blank. Otherwise, an error will occur.

\*\* available for z/OSMF V2.1 with PTF UI90005 and its requisite PTFs



# Incident Log – Add Server and Profile for SFTP \*\*

Enterprise2014



IBM

FTP Servers ▶ Add

### Add FTP Server

\* FTP server name:

\* Host:

\* Path name:

Port number (must be between: 1-65535):  *Default port number*

FTP profile:

☒ Use the default profile. Currently, the default SFTP profile is No SSH Proxy Command.

☐ Use the selected profile.

☒ Use anonymous user ID and password.

Description:

Transfer method:

☐ FTP

☒ SFTP (openSSH based secure FTP)

\* Client utility path:  *Default path*

☐ z/OS Problem Documentation Upload

Welcome x Systems x FTP Servers x

FTP Servers ▶ FTP Profiles ▶ Add

### Add FTP Profile

\* Profile name:

Profile type:

☐ FTP ☒ SFTP

☐ Make this profile the default SFTP profile.

\* SSH proxy command:

\*\* available for z/OSMF V2.1 with PTF UI90005 and its requisite PTFs





## z/OSMF Management Tasks

---


- Configuration
  - Configuration Assistant for z/OS Communications Server
- Performance
  - Capacity Provisioning
  - Resource Monitoring and System Status
  - Workload Management
- Problem Determination
  - Incident Log
- Software
  - ➔ **Management (originally called Deployment)**
- z/OS Classic Interface
  - ISPF



# z/OSMF Software Management (Deployment)




- z/OSMF Software Deployment will provide rigor in the deployment of SMP/E installed software.
- New task designed to make deployment of installed software simpler and safer.
  - Replaces manual and error prone procedures with a user friendly application
  - Incorporates IBM recommended best practices for software deployment.
- Software Deployment can clone software
  - Locally, either on a single system or system-to-system within a sysplex
  - Remotely, system-to-system across a network, even multiple sysplexes.
- Software Deployment can also:
  - Identify, modify, delete software instances
  - Generate jobs to copy a software instance
  - Verify cross-system and cross-product requisites, verify fixes
  - Copy ALL parts of the software (including SMP/E CSI inventory)
  - Helps identify actions including catalog, configuration, and security updates
- Software scope includes all SMP/E installed software:
  - IBM and ISV
  - z/OS, stack or individual products,
  - Service upgrades for all of the above (via complete replacement)

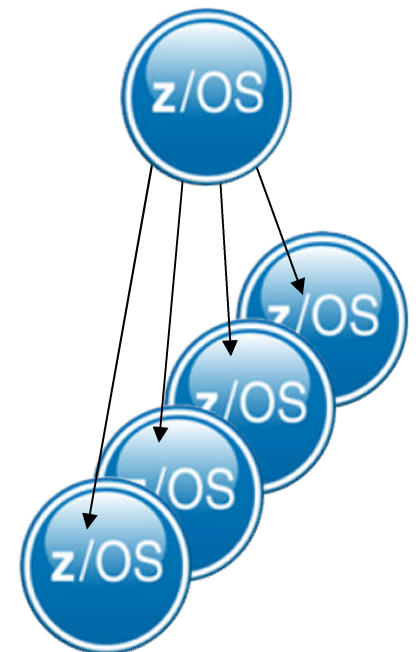





- An intuitive checklist helps guide you through the z/OS and related software deployment process
  - Select the software to deploy (a software instance)
  - Select the deployment objective
  - Report missing requisites and possible regressions
  - Configure the target software instance
  - Validate the configuration against the target system, Summarize the deployment actions, and Generate the deployment jobs
  - Execute the deployment jobs

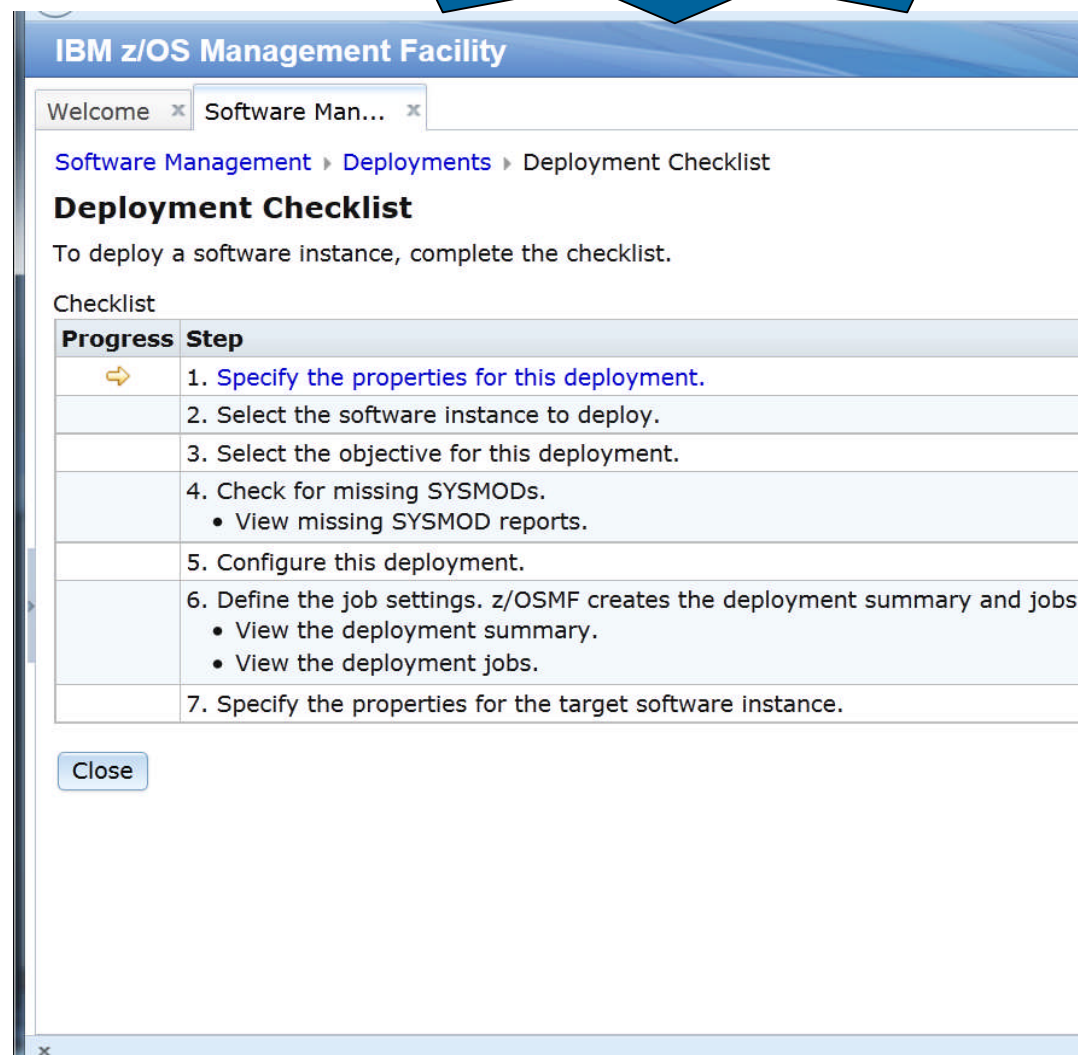



# z/OSMF Software Management

- In addition to deploying a software instance, the Software Management task allows you to:
  - Inspect a software instance to view the product, feature, and FMID content;
  - View the physical data sets that compose a software instance; and
  - Perform actions to analyze and report on software instances and installed products.
    - Identify software products that are approaching, or have reached, end of service support.
    - Validate the SMP/E structure and content of a software instance is correct.
    - Identify missing HIPER and PE fixes, and fixes associated with one or more fix categories
    - Determine if individual fixes are installed and in which software instances.
    - Compare the service and functional content of two software instances to aid in debugging or migration planning.

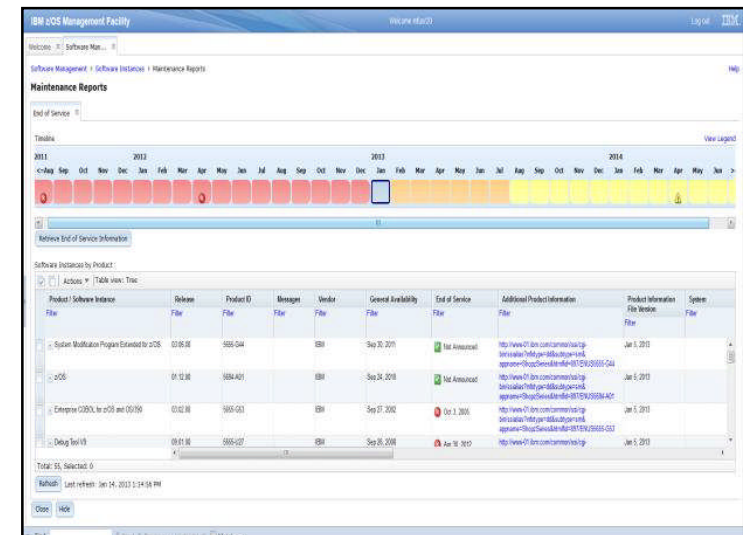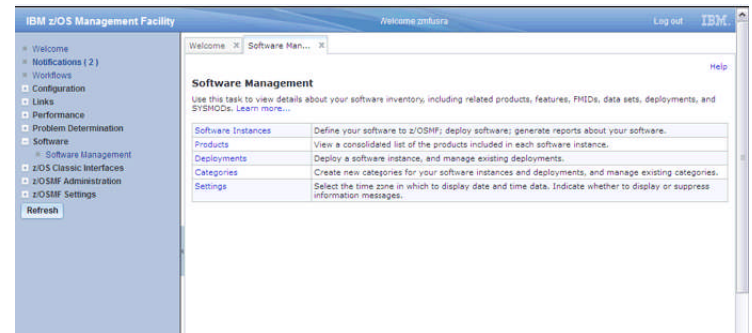





## Software Management

### • Enhancements in z/OSMF V2.1

- New in z/OSMF V2.1 you can print and export reports about your software and installed products.
- Make it easier to add non-SMP/E-managed data sets to a software instance.\*
- Offer a more convenient way to edit mount points for the z/OS UNIX System Services file system.\*
  - Simplifies management of multiple mount points for z/OS UNIX file system data sets during a deployment operation.
- Add new tab to view SMP/E managed UNIX file system data sets and related UNIX directories can be viewed easily.\*
- Provide support for the use of SFTP for remote software deployments.\*\*
- Provide integrated management of the generated deployment jobs.\*\*

\* available for z/OSMF V2.1 with PTF UI16044 and its requisite PTFs

\*\* available for z/OSMF V2.1 with PTF UI90005 and its requisite PTFs



# Software Management – “Submit deployment jobs” step \*\*

- A new step 'Submit deployment jobs' is added in Deployment Checklist, in which jobs can be submitted & managed by users

Software Management ▶ Deployments ▶ Deployment Checklist

## Deployment Checklist

To deploy a software instance, complete the checklist.

### Checklist

Progress	Step
✓	1. Specify the properties for this deployment.
✓	2. Select the software instance to deploy.
✓	3. Select the objective for this deployment.
✓	4. Check for missing SYSMODs. <ul style="list-style-type: none"><li>• View missing SYSMOD reports.</li></ul>
✓	5. Configure this deployment.
✓	6. Define the job settings. z/OSMF creates the deployment summary and jobs. <ul style="list-style-type: none"><li>• View the deployment summary.</li></ul>
➡	7. Submit deployment jobs.
	8. Specify the properties for the target software instance.

Close

\*\* available for z/OSMF V2.1 with PTF UI90005 and its requisite PTFs



# Software Management - Submit and manage jobs \*\*

Enterprise2014



IBM

- Job management actions provided to allow user to browse, submit, view status and results of jobs. These actions include:
  - Submit Job : Jobs must be run in sequence
  - View JCL, Job Output : Single selection action
  - Cancel : Single selection action
  - Purge : Multiple selection action
  - Override Complete : Multiple selection action, mark the complete status

[Software Management](#) > [Deployments](#) > [Deployment Checklist](#) > [Submit Deployment Jobs](#)

## Submit Deployment Jobs

Review the jobs created for this deployment, and submit the jobs in sequential order. When all the jobs are complete, click **Close** to proceed to the r

JCL data set name: ZOSMFAD.DM.D140625.T162244.CNTL  
Target system: PEV171

Jobs

Actions				
Sequence Filter	JCL Data Set Member Name Filter	Description [More   Less] Filter	System Filter	Status Filter
<input checked="" type="checkbox"/>	1	IZUD01CP Copy Data Sets: Copy the source software instance data sets to [More]	PEV171	<input checked="" type="checkbox"/> Complete
<input type="checkbox"/>	2	IZUD02RN get software instance data sets [More]	PEV171	
<input type="checkbox"/>	3	IZUD03UC sets: Update the entries within the SMP/E CSI data [More]	PEV171	

View

JCL

Submit Job

Job Output

Purge...

Cancel...

Override Complete

\*\* available for z/OSMF V2.1 with PTF UI90005 and its requisite PTFs



# Software Management – SFTP support \*\*



- In Deployment Checklist for a remote deployment, the pane of 'Define Job Settings' has a new tab called 'Transfer Settings'. User needs to select a FTP or SFTP server from the FTP server selector
- If user chooses an OpenSSH SFTP server, source software instance data sets must be copied into UNIX file. Generated deployment jobs add related processing automatically according to FTP choice.

**Define Job Settings**

To specify the job settings, provide the information requested on the Source System, Target System, system in the specified JCL data set. z/OSMF does not run the jobs.

Source system: PEV171  
Target system: PEV173

Source System Target System **Transfer Settings**

\* FTP server on the source system:

Select or type  Select...

IBM-ap-mvs  
IBM-ap-tivoli  
IBM-ecurep-mvs  
IBM-ecurep-mvs-sftp

\* FTP server on the source system:  
IBM-ecurep-mvs-sftp Select...

Transfer method: SFTP \* Client program path:

Authentication credentials to log into the SFTP server on the source system:

\* SFTP server user ID: ZOSMFAD SFTP server password:

Select the SFTP profile required by the target system to connect to the SFTP :

\* SFTP profile: Select or type  Select...

\* Source system work directory:

\* Target system work directory:

\*\* available for z/OSMF V2.1 with PTF UI90005 and its requisite PTFs



# Software Management – Improved EOS Enterprise2014 report \*\*



## Select Product Information File

A product information file contains information about one or more products, such as the product announce date, general availability date, and end of service date. To retrieve information from a product information file, select the file and click **Retrieve**.

Product information files:

☒ Select files that reside on or can be accessed by primary system

Product Information Files

File Filter	Description Filter	Version Filter	Activity Filter	HTTP Proxy Filter	Last Retrieved (Local) Filter	Retrieved By Filter
<input checked="" type="checkbox"/> <a href="http://public.dhe.ibm.com/services/zosmf/JSONs/IBMProductEOS.txt">http://public.dhe.ibm.com/services/zosmf/JSONs/IBMProductEOS.txt</a>	This product information file contains details about IBM System z® software.	Aug 7, 2014			Aug 8, 2014, 4:48:51 PM	DEBUG26
<input checked="" type="checkbox"/> USER.VENDOR.PRODUCT.EOSINFO	The VENDOR Product End Of Service information					

Total: 2, Selected: 2

Last refresh: Aug 15, 2014, 3:51:24 PM local time (Aug 15, 2014, 7:51:24 AM GMT)

☒ Select a file that resides on your local workstation

Select the product information file to retrieve from your local workstation.

\*File name:

Change options in Action menu to radio buttons

User can choose multiple product information files to retrieve End of Service information

\*\* available for z/OSMF V2.1 with PTF UI90005 and its requisite PTFs





## z/OSMF Management Tasks

---

- Configuration
  - Configuration Assistant for z/OS Communications Server
- Performance
  - Capacity Provisioning
  - Resource Monitoring and System Status
  - Workload Management
- Problem Determination
  - Incident Log
- Software
  - Management (originally called Deployment)
- **z/OS Classic Interface**



**ISPF**



# z/OSMF and ISPF



## Work with existing interfaces

Enterprise2014



IBM

- Enables system programmer to perform tasks from one interface.
  - Also makes ISPF applications URL Web-accessible for linking and launching from other applications
- Up to 4 panes
  - Panes can be sized. Each pane can have multiple ISPF sessions
  - tabs can be moved between panes for a total of 8 tabs
  - Shows ISPF Menu bar, Command line, Function keys
- Also available in tabbed format

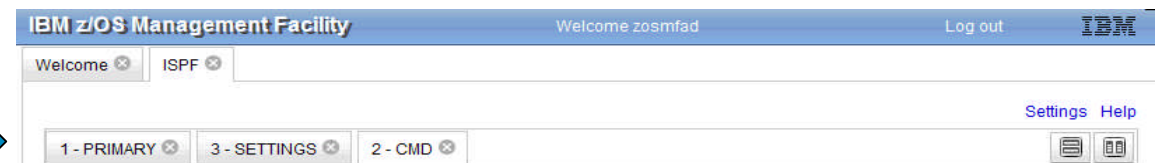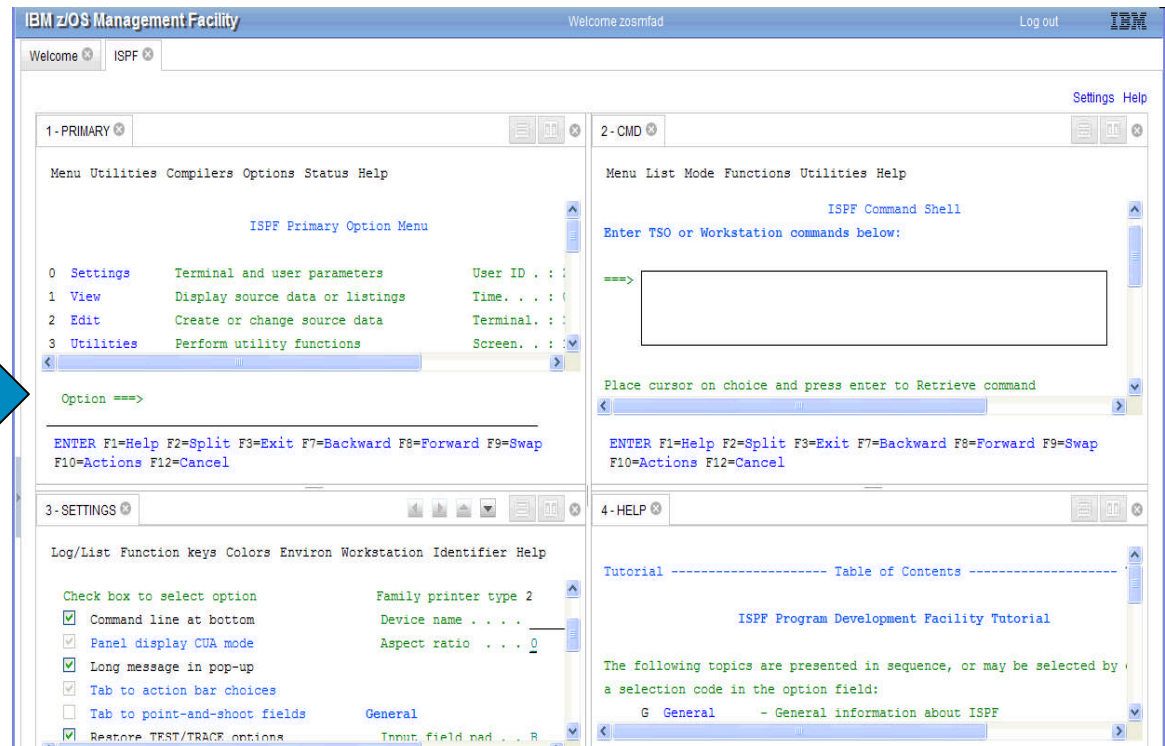



# z/OSMF and ISPF

## Additional screens

Enterprise2014



IBM

**z/OSMF ISPF User Settings**

When defining the user settings, color selections will take effect with the next z/OSMF ISPF page refresh. All other settings require you to log out and log in again.

Logon procedure: CEANN  
Region size: 2048 pages  
Account number: ACCTNO  
User group: USRGROUP  
Profile sharing: On  
Screen size: rows: 204 columns: 160  
Code page: United States (1047, 697)  
Language: English

Map colors from z/OS ISPF to z/OSMF ISPF.

z/OS ISPF colors:	z/OSMF ISPF colors:
Sample blue text	Sample blue text
Sample red text	Sample red text
Sample pink text	Sample pink text
Sample green text	Sample green text
Sample turquoise text	Sample turquoise text
Sample yellow text	Sample yellow text
Sample white text	Sample black text

☒ Show settings dialog with every logon.

OK Apply Cancel Help

Welcome ISPF

TSO Messages

ENTER DATA SET NAME -  
IMMUSER.BCD.TRACE  
--RECFM=LRECL=BLKSIZE=DSORG  
FB 80 6160 \*\*  
--VOLUMES--  
PAGE08  
TIME=10:14:12 AM. CPU=00:00:00 SERVICE=4827 SESSION=00:00:42 JANUARY 13, 2011

ENTER DATA SET NAME -

OK Attention Clear Help

ENTER F1=Help F2=Split F3=Exit F4=Backward F5=Forward F6=Debug F7=Actions F12=Cancel

Welcome ISPF

1-SDSF

Display Filter View Print Options Search Help

SDSF STATUS DISPLAY ALL CLASSES LINE 1-19 (81)

HP	JOBNAME	JobID	Owner	Pty	Queue	C	Pss	Saff	ASys	Status
---	ZOSMFAD	TSU00077	ZOSMFAD	15	EXECUTION			SV1	SV1	
---	ZOSMFAD	TSU00081	ZOSMFAD	15	EXECUTION			SV1	SV1	
---	SYSL00	STC00002	*MASTER*	15	EXECUTION			SV1	SV1	
---	VTAM44	STC00007	*****	15	EXECUTION			SV1	SV1	ARRELEN
---	XCFTH0N	STC00008	IMMUSER	15	EXECUTION			SV1	SV1	
---	GRASST0N	STC00011	*****	15	EXECUTION			SV1	SV1	
---	DFS	STC00015	DFS	15	EXECUTION			SV1	SV1	
---	INIT	STC00020	IMMUSER	15	EXECUTION			SV1	SV1	
---	INIT	STC00021	IMMUSER	15	EXECUTION			SV1	SV1	
---	INIT	STC00022	IMMUSER	15	EXECUTION			SV1	SV1	
---	TCAS	STC00023	IMMUSER	15	EXECUTION			SV1	SV1	
---	BPZAS	STC00026	IMMUSER	15	EXECUTION			SV1	SV1	
---	BPZAS	STC00028	IMMUSER	15	EXECUTION			SV1	SV1	
---	RESOLVER	STC00040	TCPIPMS	15	EXECUTION			SV1	SV1	
---	TCPIP	STC00041	TCPIP	15	EXECUTION			SV1	SV1	ARRELEN
---	RRS001	STC00046	WSCH01	15	EXECUTION			SV1	SV1	ARRELEN

COMMAND INPUT ==> SCROLL ==>

ENTER F1=HELP F2=SPLIT F3=END F4=RETURN F5=IFIND F6=BOOK F7=UP F8=DOWN F11=RIGHT F12=RETRIEVE

- Customize settings
- TSO messages have priority and pop up
- Example: SDSF status





## z/OSMF ISPF - Enable Ctrl key\*

- User can use z/OSMF WebISPF Ctrl key as Enter key; This allows the user to submit requests in a way similar to 3270 z/OS ISPF.

**z/OSMF ISPF User Settings**

Ctrl key as Enter key takes effect immediately after pressing the OK or Apply buttons. Other settings take effect when you start (or restart) ISPF. Color selections also take effect at the next z/OSMF ISPF page refresh.

☒ Show settings dialog with every logon.

☒ Enable Ctrl key as Enter key.

Logon procedure: CEANN

Region size (kilobytes): 0

Account number: 123789

User group: ZOSMFGRP

Profile sharing: On

Screen size rows: 204

Screen size columns: 160

Code page: United States (1047, 697)

Language: English

Map colors from z/OS ISPF to z/OSMF ISPF.

z/OS ISPF colors:	z/OSMF ISPF colors:
Sample blue text	Sample blue text
Sample red text	Sample red text
Sample pink text	Sample pink text
Sample green text	Sample green text

OK Apply Cancel Help

The default is unchecked

\* available for z/OSMF V2.1 with PTF UI16044 and its requisite PTFs





# Agenda

---

- Overview of z/OS Simplification Efforts
  - The z/OS Management Facility (z/OSMF)
- What's New in z/OSMF V2.1
  - Use of the WebSphere Application Server Liberty profile
  - Workflows
  - Support for External Applications
- z/OSMF Management Tasks
  - Configuration
  - Performance
  - Problem Determination
  - Software
  - z/OS Classic Interface: ISPF
- **Other z/OSMF Capabilities**
  - ➔ **Security**
    - Internet and Intranet Links
    - System
    - Programmatic Interface for z/OSMF





- **z/OSMF enhanced its authorization model to provide tighter integration with Enterprise Security Management products.**
  - New (z/OSMF V1.13) resource class pair for z/OSMF
    - ZMFAPLA resource class
    - GZMFAPLA grouping class
  - Use of SAF groups to represent z/OSMF roles
    - connection of z/OSMF users to these new Groups
  - Resource names associated with all z/OSMF tasks and links.
  - Resource class profiles control authorization to z/OSMF managed resources.
- **Support for custom roles via creation of additional SAF groups at system programmer's discretion.**
- **Granularity of access determined by z/OSMF resource profile permissions for a given group.**
- **Exploitation of Resource Classes, profiles, and groups**
  - Plug-ins register resource names associated with each of their tasks
  - All task resource names associated with the ZMFAPLA resource class.
  - IBM reserved resources: ZOSMF.<plugin-name>.<task-name>.<action-control-qualifier>
    - The plug-in profile will be defined at deployment time.
    - For delayed deployment and activation of plug ins create profiles when plug-in is deployed
  - Definition of SAF Groups and connection of z/OSMF users to these new Groups
  - Groups permitted to z/OSMF resource profiles (in ZMFAPLA) to facilitate z/OSMF Role support



- **Enhancements in z/OSMF V2.1**

- Repository mode removed
  - SAF-based security, previously referred to as SAF Authorization Mode, is now the only supported means of creating and managing user authorizations in z/OSMF.
  - Related to this change, the Users task and Roles task in the z/OSMF Administration category are no longer needed, and are thus removed from the navigation area.
  - You have the ability to convert to SAF mode while on z/OSMF V1.13 or during the migration to z/OSMF V2.1
- New Appendix A, “Security configuration requirements for z/OSMF”
  - This appendix describes the security configuration requirements for z/OSMF.





# Agenda

---

- Overview of z/OS Simplification Efforts
  - The z/OS Management Facility (z/OSMF)
- What's New in z/OSMF V2.1
  - Use of the WebSphere Application Server Liberty profile
  - Workflows
  - Support for External Applications
- z/OSMF Management Tasks
  - Configuration
  - Performance
  - Problem Determination
  - Software
  - z/OS Classic Interface: ISPF
- **Other z/OSMF Capabilities**
  - Security
  -  **– Internet and Intranet Links**
  - System
  - Programmatic Interface for z/OSMF




# z/OSMF Internet and Intranet Links

Enterprise2014



IBM

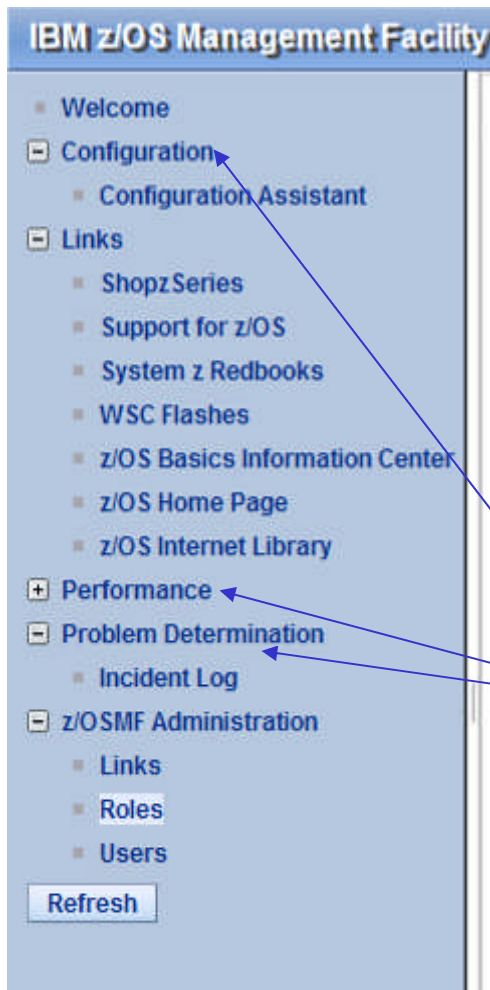

- The Links category contains the pre-defined links provided by IBM as well as any new links added by the z/OSMF administrator
- Administrator can define which roles have access to each of the defined links.
  - The Links task in Administration category allows the administrator to dynamically add links to non-z/OSMF resources, e.g. ISV products, commonly used installation Web sites
- The IBM pre-defined links are accessible to all users, including guests, by default.
- Also, a new interface enables you to add non-z/OSMF launch points and links to any category on the left hand side navigation tree.



## z/OSMF Administration: Adding a link



IBM z/OS Management Facility - Mozilla Firefox

File Edit View History Bookmarks Tools Help

https://9.12.41.62:32208/zosmf/

Welcome debug13 Log out IBM

IBM z/OS Management Facility

Welcome Links Incident Log Workload Man... Configuratio... Users Roles

Links > New Link Help

**New Link**

Use this panel to define a new link for z/OSMF.

\* Name (maximum 30 characters):

\* URL (maximum 4096 characters):

\* Category

Links

Roles authorized to use this link:

Role	Description
<input checked="" type="checkbox"/> z/OSMF Administrator	User can perform all tasks defined within z/OSMF
<input type="checkbox"/> z/OSMF User	User can perform any tasks that are not defined as z/OSMF administration tasks
<input type="checkbox"/> z/OSMF Authenticated Guest	User is logged into z/OSMF; however, no role is associated with the user's user ID
<input type="checkbox"/> z/OSMF Guest	User is not logged into z/OSMF

Need to share information with the team?  
Need to go to another application?  
Add a link!

Define the link

Where it goes (on the nav bar) planned for V1.12

Select who can see it

Done 9.12.41.62:32208





# Agenda

- Overview of z/OS Simplification Efforts
  - The z/OS Management Facility (z/OSMF)
- What's New in z/OSMF V2.1
  - Use of the WebSphere Application Server Liberty profile
  - Workflows
  - Support for External Applications
- z/OSMF Management Tasks
  - Configuration
  - Performance
  - Problem Determination
  - Software
  - z/OS Classic Interface: ISPF
- **Other z/OSMF Capabilities**
  - Security
  - Internet and Intranet Links
  - ➔ **System**
    - Programmatic Interface for z/OSMF





## System setting – Discover \*\*

- Discover the system definition that hosts the z/OSMF instance automatically.
- When a conflict occurs (same sysplex and system name but other attributes differs) the user can add a new entry with another nickname or update the old one.

The screenshot shows the IBM Systems console interface. On the left, the 'Systems' table is visible with a context menu open, highlighting the 'Discover' option. The main window displays the 'Discovered Systems' wizard, which provides a 'Welcome' message and two tables: 'Discovered Systems without Conflicts' and 'Discovered Systems with Conflicts'.

**Discovered Systems without Conflicts**

Sysplex	System	z/OS Version and Release	JES Member Name	JES Type
PLEX1	SYSNEW	z/OS V1R13	SYSNEW	JES2

**Discovered Systems with Conflicts**

Sysplex	System	z/OS Version and Release	JES Member Name	JES Type
PLEX1	SY1	z/OS V2R1	SY1	JES2
PLEX1	SMPSYS	z/OS V2R1	SMPSYS	JES2
PLEX1	OLDSYS	z/OS V1R12	OLDSYS	JES3

The wizard includes navigation buttons at the bottom: '< Back', 'Next >', 'Finish', and 'Cancel'.

\*\* available for z/OSMF V2.1 with PTF UI90005 and its requisite PTFs






## System setting – Group \*\*

- The group definition is introduced.
  - A group represents a logical list of system entries (which can be exploited by other plug-ins in the future)
- User can link systems to groups in “Add Group”, “Modify Group”, “Add System”, “Modify System” panels.
- System table is changed to tree view.

Default view  
is by sysplex,  
can be changed  
to view by group

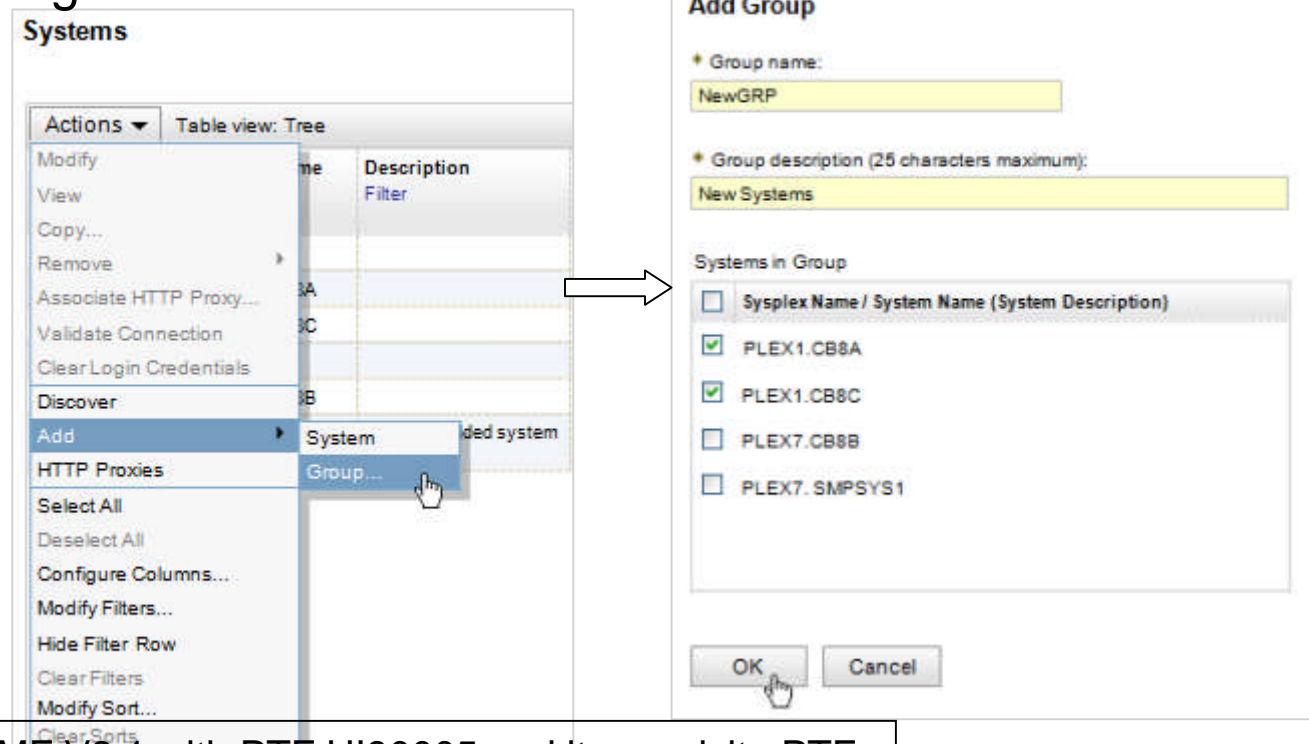

\*\* available for z/OSMF V2.1 with PTF UI90005 and its requisite PTFs





## UI and Currency \*\*

- The header and footer of the Welcome page are now 256 characters wide
- Dojo version is upgraded from Dojo 1.7.2 to Dojo 1.9.1.
- KC CI 1.5 replaces KC Local 1.0 (Knowledge Center Help system)
- z/OSMF is enhanced to provide support for Firefox ESR 24 and IE 10

	Windows 7 32 bit	Windows 7 64 bit	Windows 8 Pro, Desktop
Internet Explorer 8.x	Yes	Yes	No
Internet Explorer 8.x (64)	No	Yes	No
Internet Explorer 9.x	Yes	Yes	No
Internet Explorer 9.x (64)	No	Yes	No
Internet Explorer 10.x	Yes	Yes	Yes
Internet Explorer 10.x (64)	No	Yes	Yes
Firefox ESR 24	Yes	Yes	Yes


\*\* available for z/OSMF V2.1 with PTF UI90005 and its requisite PTFs





# Agenda

- Overview of z/OS Simplification Efforts
  - The z/OS Management Facility (z/OSMF)
- What's New in z/OSMF V2.1
  - Use of the WebSphere Application Server Liberty profile
  - Workflows
  - Support for External Applications
- z/OSMF Management Tasks
  - Configuration
  - Performance
  - Problem Determination
  - Software
  - z/OS Classic Interface: ISPF
- **Other z/OSMF Capabilities**
  - Security
  - Internet and Intranet Links
  - System



**– Programmatic Interface for z/OSMF**





## Jobs REST APIs enhancements

- **z/OSMF R13 introduces RESTful API interface to z/OS for submitting and accessing batch job**
- **Enhancement in V2.1:**
  - **Support for JCL symbolics, use correlator instead of jobname/jobid, asynchronous notification on job completion**
  - **Support for submit job to secondary JES subsystem \***
    - The Jobs API already supports submitting a job to secondary JES2. The request format is updated to allow the user to specify the JES2 subsystem name on which the job is going to be processed.
  - **Support for hold & release a job \***
    - Jobs being processed, or waiting to be processed, are kept on a job queue in priority sequence.
    - You can issue hold job http request via the Jobs API which will issue JES2 commands to hold specified jobs or all jobs currently in a system.
    - You can also keep jobs in specified job queues or all job queues from being executed until you issue release request via the Jobs API to release them.
  - **Some REST services can be run synchronously, if coded to use the latest version of the service. \*\***
    - Previously, these services were limited to running asynchronously only.
      - The synchronous processing is supported for JES2 subsystems only.
    - Related to this change, the enhanced services, if run synchronously, no longer require that your user ID be authorized to the Common Information Model (CIM) server and permitted to the JES2/JES3 jobs.

\* available for z/OSMF V2.1 with PTF UI16044 and its requisite PTFs

\*\* available for z/OSMF V2.1 with PTF UI90005 and its requisite PTFs





## RESTful File API\*

- The RESTful File API allows a client application to list the data sets or UNIX files and directories on a z/OS system.
- Today z/OS supports an interface via FTP. The ability to drive remote requests similar to FTP from HTTP(s) provides a secure and functionally rich interface to retrieve or manipulate file or Data Set information
- The URLs of RESTful File API have the format:

*https://{host}:{port}/zosmf/restfiles/ds/{resource}?{parm}*

*or*

*https://{host}:{port}/zosmf/restfiles/fs/{resource}*

- "https://{host}:{port}" specifies the target system address and port.
- "zosmf/restfiles" identifies the z/OS data set and file REST interface.
  - "/ds" identifies a data set request
  - "/fs" identifies a UNIX file path request
- "{resource}?{parm}" represents the resource, such as a data set name or file path name, and optionally one or more parameters, to qualify the request.

\* available for z/OSMF V2.1 with PTF UI16044 and its requisite PTFs



## RESTful File API and PTF UI90005 \*\*



- New REST services are added to the z/OS data set and file REST interface API. The new services allow a caller to:
  - List the members of a z/OS partitioned data set (PDS or PDSE)
  - Retrieve the contents of a sequential data set, or a member of a PDS or PDSE
  - Retrieve the contents of a z/OS UNIX file
  - Write data to a sequential data set or a member of a PDS or PDSE
  - Write data to a z/OS UNIX file.

\*\* available for z/OSMF V2.1 with PTF UI90005 and its requisite PTFs



# z/OSMF information retrieval REST interface API \*\*

Enterprise2014



IBM

- A new REST service is added to allow a caller to obtain information about z/OSMF on the z/OS host system, such as:
  - version,
  - release, and
  - service level.
- With this information, a program can determine which z/OSMF plug-ins and core functions are available for use on a given system.

\*\* available for z/OSMF V2.1 with PTF UI90005 and its requisite PTFs





## REST Services – Jobs interface \*\*

- Synchronous support for the job modify operations
  - For jobs REST API, the functions of cancel, delete (cancel a job and purge its output), hold, release, and change job class are currently implemented using CIM services. Each of these functions is handled as an asynchronous request with status code 202 Accepted response returned.
  - JES2 provided a new feature that allows these functions to be performed synchronously and also provides the ability to verify the user's authority to perform the actions. The status code 200 OK will be returned to the user with an attached JSON document further qualifying the status of the request.
- In V1.13, JES2 supports greater than 10 million spin SYSOUT data sets in spool. Now z/OSMF REST jobs interface are updated to support this change.
- 2 new properties “**recfm**” and “**lrecl**” are added in the returned JSON job file document when using list the spool files function. This helps user to do some proper formatting. For example, the RECFM includes FBA which indicates that the output contains ASA control characters, a caller might want to know that so that they can handle the character in column 1 (-, 1, 0, etc).

\*\* available for z/OSMF V2.1 with PTF UI90005 and its requisite PTFs



# REST Services – Synchronous support for the job modify \*\*



- For PUT method functions cancel, hold, release, and change job class, Jobs API adds a “version” property to the JSON body of the request to distinguish which way should be used to modify the job. Default version is “1.0”, which means CIM servers will be used.

## Sample Request:

PUT https://pev099.pok.ibm.com:32208/zosmf/restjobs/jobs/IBMUUSER1/JOB00021

Content-Type: application/json

```
{“class”:“E”,“version”:“2.0”}
```

## Sample Response:

Status: 200 OK

```
{“message”:“Request was successful.”,“jobname”:“IBMUUSER1”,“original jobid”:“JOB00021”,“status”:0,“owner”:“IBMUUSER”,“job correlator”:“J0000021SY1.....CD63DC10.....”,“jobid”:“JOB00021”}
```

- For DELETE method functions cancel a job and purge its output, Jobs API add a “X-IBM-Job-Modify-Version” custom header to distinguish which way should be used. Default of version header is “1.0”, which means CIM servers will be used by default.

## Sample Request:

DELETE https://pev099.pok.ibm.com:32208/zosmf/restjobs/jobs/SUBAPI/JOB00064

X-IBM-Job-Modify-Version: 2.0

## Sample Response:

Status: 200 OK

```
{“message”:“Request was successful.”,“member”:“SY1”,“jobname”:“SUBAPI”,“original jobid”:“JOB00064”,“status”:0,“owner”:“IBMUUSER”,“job correlator”:“J0000064SY1.....CD641439.....”,“jobid”:“JOB00064”,“sysname”:“SY1”}
```





## REST Services – List the spool files \*\*

- The URL format is not changed

*GET https://host:port/zosmf/restjobs/jobs/[subsystem-name]/jobname/jobid/files*

or *https://host:port/zosmf/restjobs/jobs/job-correlator/files*

- The “id” property returned could be larger than 10 million
- 2 new properties “recfm” and “lrecl” also be returned.

### Sample Request:

GET https://pev099.pok.ibm.com:32208/zosmf/restjobs/jobs/MSPINW/JOB01301/files

### Sample Response:

Status: 200 OK

```
[{"jobname":"MSPINW","recfm":"UA","byte-count":1752,"record-count":36,"job-correlator":
"J0001301SY1.....CD63F3DA.....","class":"A","jobid":"JOB01301","id":2,"ddname":"JESMSGGLG",
"records-url":"https://pev099.pok.ibm.com:443/zosmf/restjobs/jobs/J0001301SY1.....CD63F3DA.....%
3A/files/2/records","lrecl":133,"subsystem":"JES2","stepname":"JES2","procstep":null},
... some of the contents have been omitted
{"jobname":"MSPINW","recfm":"FB","byte-count":22000,"record-count":500,"job-correlator":
"J0001301SY1.....CD63F3DA.....","class":"T","jobid":"JOB01301","id":4294967295,"ddname":"SYS00002",
"records-url":"https://pev099.pok.ibm.com:443/zosmf/restjobs/jobs/J0001301SY1.....CD63F3DA.....
%3A/files/4294967295/records","lrecl":80,"subsystem":"JES2","stepname":"GO","procstep":null}]
```

\*\* available for z/OSMF V2.1 with PTF UI90005 and its requisite PTFs



# REST Services – Retrieve the contents of a job spool file \*\*

Enterprise2014



IBM

- The URL format is not changed

*GET https://host:port/zosmf/restjobs/jobs/[subsystem-name]/jobname/jobid/files/id/records*  
or *https://host:port/zosmf/restjobs/jobs/job-correlator/files/id/records*

- The id parameter in the url could be larger than 10 million.

## **Sample Request:**

GET https://pev099.pok.ibm.com:32208/zosmf/restjobs/jobs/MSPINW/JOB01301/files/**4294967295**/records

## **Sample Response:**

Status: 200 OK

The contents of SYS00002 ...

\*\* available for z/OSMF V2.1 with PTF UI90005 and its requisite PTFs



# REST Services – Data set and file interface \*\*

Enterprise2014



IBM

- In z/OSMF V2R1 SPE1, z/OS data set and file REST interface was introduced with listing data set name and z/OS UNIX file and directory name function. z/OSMF V2R1 SPE2 delivers the REST Services to retrieve the contents or write data to a sequential data set, a member of a PDS/PDSE data set or a z/OS UNIX file, which is also known as Browse/Edit functions.
- The URLs of RESTful File API have the format:  
*https://{host}:{port}/zosmf/restfiles/ds/{resource}?{parm}*  
*https://{host}:{port}/zosmf/restfiles/fs/{resource}*
  - "https://{host}:{port}" specifies the target system address and port.
  - "zosmf/restfiles" identifies the z/OS data set and file REST interface.
    - "/ds" identifies a data set request
    - "/fs" identifies a UNIX file path request
  - "{resource}?{parm}" represents the resource, such as a data set name or file path name, and optionally one or more parameters, to qualify the request.
- When retrieving the content of a dataset or uss file, if the size is greater than 8M, user will get status code 206 and partial records. When writing data to a dataset or uss file, user will get an exception if the size of request body is greater than 8M.
- The request against migrated Dataset will get 500 Internal Server Error

\*\* available for z/OSMF V2.1 with PTF UI90005 and its requisite PTFs



# REST Services – Retrieve data set/uss file contents \*\*



- Use the GET method to retrieve the contents of a sequential data set, or a member of a partitioned data set (PDS or PDSE). include one or more volume serials on the request for an un-cataloged data set
  - <https://host:port/zosmf/restfiles/ds/<dataset-name>>
  - [https://host:port/zosmf/restfiles/ds/<dataset-name>\(<member-name>\)](https://host:port/zosmf/restfiles/ds/<dataset-name>(<member-name>))
  - [https://host:port/zosmf/restfiles/ds/-\(vol1,vol2,...\)/<dataset-name>](https://host:port/zosmf/restfiles/ds/-(vol1,vol2,...)/<dataset-name>)
  - [https://host:port/zosmf/restfiles/ds/-\(vol1,vol2,...\)/<dataset-name>\(<member-name>\)](https://host:port/zosmf/restfiles/ds/-(vol1,vol2,...)/<dataset-name>(<member-name>))
- Use the GET method to retrieve the contents of z/OS UNIX System Service file
  - <https://host:port/zosmf/restfiles/fs/<file-path-name>>
- Headers:
  - **If-None-Match:** This optional header value can specify a previously returned ETag token that will allow z/OSMF to correlate this request with previous requests. If the data on the z/OS host has not changed since the ETag was generated, an HTTP 304 Not Modified status will be returned.
  - **X-IBM-Data-Type:** This is an optional parameter with two values: text (default) and binary. The text type indicates that the data read from the file will be converted from EBCDIC to UTF-8. The binary type indicates that no conversion should occur and the data read from the file will be returned as-is without translation.

\*\* available for z/OSMF V2.1 with PTF UI90005 and its requisite PTFs



# REST Services – Retrieve data set contents example \*\*

Enterprise2014



IBM

## Sample Request:

GET zosmf/restfiles/ds/SYS1.PARMLIB(PROG00) HTTP/1.1

## Sample Response:

HTTP/1.1 200 OK

Date: Wen, 06 Mar 2013 06:39:28 +0000GMT

Content-Type: text/plain

Connection: close

Response Headers:

{"ETag": "S8WNSD09SNSNE093"}

Response Body:

```
{
  APF ADD DSNAME(SWRMF3.FRDL.V770.SERBLINK.CP)           00010003
  LNKST DEFINE NAME(R2) COPYFROM(DYNLNK1)                 00021003
  LNKST ADD NAME(R2) DSNAME(SWRMF3.FRDL.V770.SERBLINK.CP) 00022003
  LNKST ACTIVATE NAME(R2)                                  00023003
}
```

\*\* available for z/OSMF V2.1 with PTF UI90005 and its requisite PTFs



# REST Services – Write data to data set/uss File \*\*

Enterprise2014



IBM

- Use the PUT method to write data to a sequential data set, or a member of a partitioned data set (PDS or PDSE). include one or more volume serials on the request for an uncataloged data set
  - <https://host:port/zosmf/restfiles/ds/<dataset-name>>
  - [https://host:port/zosmf/restfiles/ds/<dataset-name>\(<member-name>\)](https://host:port/zosmf/restfiles/ds/<dataset-name>(<member-name>))
  - [https://host:port/zosmf/restfiles/ds/-\(vol1,vol2,...\)/<dataset-name>](https://host:port/zosmf/restfiles/ds/-(vol1,vol2,...)/<dataset-name>)
  - [https://host:port/zosmf/restfiles/ds/-\(vol1,vol2,...\)/<dataset-name>\(<member-name>\)](https://host:port/zosmf/restfiles/ds/-(vol1,vol2,...)/<dataset-name>(<member-name>))
- Use the PUT method to write data to a z/OS UNIX System Service file
  - <https://host:port/zosmf/restfiles/fs/<file-path-name>>
- Headers:
  - **If-Match:** This optional header value can specify a previously returned ETag token that will allow z/OSMF to correlate this request with previous requests. If the data on the z/OS host has not changed since the ETag was generated, then the data will be written. If it has been modified, it will be failed to edit, an HTTP 304 (data set) or HTTP 412 (uss file) will be returned.
  - **X-IBM-Data-Type:** This is an optional parameter with two values: text (default) and binary. The text type indicates that the data read from the file will be converted from UTF-8 to EBCDIC. The binary type indicates that no conversion should occur. The data will be written to the data set at the record level boundary.

\*\* available for z/OSMF V2.1 with PTF UI90005 and its requisite PTFs



# REST Services – Write Data to Uss File

## Enterprise2014

### Example \*\*



IBM

#### Sample Request:

PUT zosmf/restfiles/fs/etc/inetd.conf HTTP/1.1

Request Headers:

{'If-Match':'S8WNSD09SNSNE093'}

Request Body:

```
{
#=====
# service | socket | protocol | wait/ | user | server | server program
# name   | type   |      | nowait|   | program | arguments
#=====
#
# Following line uncommented by USSSETUP job: 2013/04/24 15:04:00
}
```

#### Sample Response:

HTTP/1.1 200 OK

Date: Wen, 06 Mar 2013 06:39:28 +0000GMT

Content-Type: text/plain

Connection: close

Response Headers:

{'ETag': 'S8WNSD09SNSNE09B'}

\*\* available for z/OSMF V2.1 with PTF UI90005 and its requisite PTFs



# REST Services – Retrieve z/OSMF information \*\*

Enterprise2014



IBM

- User can use the GET method to retrieve information about z/OSMF on a particular z/OS system, including z/OSMF version, host name, listening port, SAF realm, the active status of plug-ins, and z/OS version
  - The URL format of API : *https://{host}:{port}/zosmf/info*

## Sample Response:

```
HTTP/1.1 200 OK
Date: Wed, 06 Mar 2013 06:39:28 +0000GMT
Content-Type: text/plain
Connection: close
{"zosmf_saf_realm":"SAFRealm",
 "zosmf_port":"443",
 "zosmf_full_version":24.02,
 "plugins":
 [{"pluginVersion":"hsma210.spe2;driver05;2014-02-11T03:21:53",
  "pluginStatus":"ACTIVE",
  "pluginDefaultName":"Import Manager"},
 {"pluginVersion":"hsma213.spe2;driver05;2014-02-11T10:17:27",
  .....
  "pluginDefaultName":"Workflow"}]},
 "api_version":1,
 "zos_version":"04.24.00",
 "zosmf_version":24,
 "zosmf_hostname":"host.name.com"}
```



# Shameless Plugs



- **You can try some of these great functions THIS WEEK!!!**
  - Without having to install or configure z/OSMF
  - **Just attend one of the z/OSMF Hands-On Lab sessions**
    - z/OS SDSF using z/OSMF
    - z/OSMF Configuration Assistant
    - z/OSMF Incident Log
    - z/OSMF Resource Monitoring
    - z/OSMF Software Deployment
    - z/OSMF Software Management
    - z/OSMF Workflows (Using z/OSMF for a z/OS V2.1 Migration)
    - z/OSMF Workload Management
  - **Three opportunities on Thursday 1 PM, 2:30 PM, and 4:15 PM in Lido 3006**
    - You can follow self guided instructions on how to use a number of z/OSMF functions
    - You can perform multiple exercises and attend more than one lab session
- **If you plan on installing z/OSMF V2.1 come hear how to configure z/OSMF by**
  - **Attending session zIN023 z/OSMF V2.1 Implementation and Configuration**
    - Wednesday or Thursday at 9AM
      - New users and migrating user paths will be covered, as well as adding additional plug-ins



# Summary - What's New in z/OSMF V2.1



- **z/OSMF V2.1 uses the WebSphere Application Server Liberty profile**
  - **Runs on smaller configurations**
    - Requires available CPU resource equivalent to a processor with a processor capacity index (PCI) of at least 45.
  - **Initializes faster**
  - **Uses less CPU**
  - **Uses less memory**
    - Requires one gigabyte (1 GB) of central storage.
      - This amount is in addition to your existing storage allocation for other applications running in the same z/OS system.
  - **Installation of service is easier**
    - You no longer have to run a script (izusetup –service)
- **z/OSMF V2.1 provides:**
  - **A new Workflow Application and Notifications**
  - **Enhancements to many z/OSMF applications (plug-ins)**



# Summary - PTF UI16044 (and its requisite PTFs) \*

Enterprise2014



**This PTF (and its requisite PTFs) introduce a new:**

- **Import Manager** task in the z/OSMF Administration category.
  - Administrators can use the Import Manager task to import plug-ins, event types, event handlers, and links into z/OSMF.
    - **SDSF PTF UI15294** provides the descriptor to enable SDSF to be used as an external z/OSMF task
- **z/OS data set and file REST interface**
  - This API allows an HTTP client application to work with z/OS data sets and UNIX files on the z/OSMF host system.

**Several existing z/OSMF functions are enhanced:**

- The **Incident Log** task
- The **ISPF** task
- The **Resource Monitoring** task
- The **Software Management** task
- The **Workflows** task
- The **Workload Management** task
- The **z/OS jobs REST interface** services API

\* available for z/OSMF V2.1 with PTF UI16044 and its requisite PTFs



# Summary - z/OSMF's Most Recent Enhancements \*\*

Enterprise2014



IBM

The following new functions have been made available by PTFs UI90004, UI90005, UI90006, UI90007, UI90008, UI90009, UI90010, UI90011, UI90012, UI90013, and UI90014 (9/30/2014):

- Provide browser support for Mozilla Firefox ESR 24 and Microsoft Internet Explorer 10.
- Enhance Incident Log to provide support for the use of SSH File Transfer Protocol (SFTP) for sending dumps and logs to IBM or another vendor.
- Enhance the Software Deployment function of Software Management to:
  - Provide support for the use of SFTP for remote software deployments.
  - Provide integrated management of the generated deployment jobs.
- Enhance the Workflows task to enable:
  - A workflow step to be designed to save its output in an *output file* which on completion of the step, the contents of the output file become available for use by subsequent steps in the workflow instance, or by other workflow instances.
  - A workflow step to be designed to be performed conditionally, based on whether a logical condition is satisfied on the z/OS system.
- Enhance the configuration workflow through the discovery functions of z/OS and z/OSMF configuration settings to determine the status of the current setup.
- Provide z/OSMF REST services support for editing and browsing files and data sets
- A new REST service is added to allow a caller to obtain information about z/OSMF on the z/OS host system
- The 'Systems' task now provides support for defining groups for organizing your systems.
  - Allows users to view the system definitions in the Systems table by sysplex or group.
  - Adds a new Discover action, which allows users to discover and create system definitions for the active systems that belong to the same JES2 multi-access spool (MAS) or JES3 complex as the z/OSMF host system..

\*\* available for z/OSMF V2.1 with PTF UI90005 and its requisite PTFs

© Copyright IBM Corporation 2014





**Thank You**



# Growing your IBM skills – a new model for training

Enterprise2014



IBM

## Meet the authorized IBM Global Training Providers in the Enterprise Solution Showcase

- Access to training in more cities local to you, where and when you need it, and in the format you want
  - Use [IBM Training Search](#) to locate training classes near to you
- Demanding a high standard of quality / see the paths to success
  - Learn about the [New IBM Training Model](#) and see how IBM is driving quality
  - Check [Training Paths and Certifications](#) to find the course that is right for you
- [Academic Initiative](#) works with colleges and universities to introduce real-world technology into the classroom, giving students the hands-on experience valued by employers in today's marketplace
- [www.ibm.com/training](http://www.ibm.com/training) is the main IBM training page for accessing our comprehensive portfolio of skills and career accelerators that are designed to meet all your training needs.



Global Skills Initiative

© Copyright IBM Corporation 2014

AVNET



Global Knowledge.

INGRAM  
MICRO®

LearnQuest





# Related learning: Systems track

- Courses:
  - [AN05G: POWER8 Systems and AIX Enhancements](#)
  - [AN08G: Power and AIX Enhancements Workshop](#)
  - [OS19G: What's new on IBM i V7R2 and POWER8 Systems](#)
  - [ESA0G: IBM zEnterprise System: A Technical Introduction](#)
  - [ESA1G: IBM zEnterprise System: Using zManager to Provision Virtual Servers](#)
  - [ESA2G: IBM zEnterprise: Unified Resource Manager Workload and Performance Management](#)
  
- Training paths:
 

<ul style="list-style-type: none"> <li>✓ <b>IBM Power Systems and AIX</b> <i>(track relevant)</i> <ul style="list-style-type: none"> <li>– <a href="#">AIX Users and System Administration</a></li> <li>– <a href="#">AIX Security, Network Administration, and Performance</a></li> <li>– <a href="#">Power Systems for AIX Virtualization</a></li> <li>– <a href="#">PowerHA SystemMirror for AIX</a></li> <li>– <a href="#">Cloud on Power</a></li> <li>– <a href="#">IBM i: End User</a></li> <li>– <a href="#">IBM i: System Operator</a></li> </ul> </li> <li>✓ <b>IBM i: System Administrator</b> <i>(track relevant)</i> <ul style="list-style-type: none"> <li>– <a href="#">IBM i: Application Developer</a></li> <li>– <a href="#">IBM i: Virtualization</a></li> <li>– <a href="#">IBM i: Solutions</a></li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>– <a href="#">IBM i: WebSphere Application Server Administrator</a></li> <li>– <a href="#">IBM i: Networking</a></li> <li>– <a href="#">AIX Systems Management, Clustering, Internals, and Cloud Computing</a></li> <li>✓ <b>z/OS and System z</b> <i>(track relevant)</i> <ul style="list-style-type: none"> <li>– <a href="#">z/OS Operation and Parallel Sysplex</a></li> <li>– <a href="#">z/OS Installation, Tuning, JES, and REXX Programming and Problem Diagnosis</a></li> <li>– <a href="#">Security Skills</a></li> <li>– <a href="#">z/OS UNIX System Services, WebSphere and SAP</a></li> <li>– <a href="#">z/VM and Linux on System z</a></li> <li>– <a href="#">z/OS Networking</a></li> </ul> </li> </ul>
--	---





# Backup





## Additional information

---

- **z/OS Management Facility website**
  - <http://ibm.com/systems/z/os/zos/zosmf/>
- **IBM z/OS Management Facility education modules in IBM Education Assistant**
  - <http://publib.boulder.ibm.com/infocenter/ieduasst/stgv1r0/index.jsp>
  - Scroll down to z/OS Management Facility
- **IBM Publications Center**
  - Program Directory for z/OS Management Facility (GI11-9847)
  - IBM z/OS Management Facility Configuration Guide (SA38-0657)
  - IBM z/OS Management Facility Programming (SA32-1066)
  - IBM z/OS V2R1.0 Management Facility License Information (GC52-1386)
    - <http://www.ibm.com/e-business/linkweb/publications/servlet/pbi.wss>
- **IBM z/OS Management Facility Information center**
  - <http://pic.dhe.ibm.com/infocenter/zos/v2r1/index.jsp>