


A Guided Tour of **Policy-Based Data Set Encryption**



Eysha S. Powers
Enterprise Cryptography, IBM
eysha@us.ibm.com


Getting Started...

1. Configure Crypto Express Cards
2. Configure ICSF
3. Start ICSF
4. Load AES MK
5. Initialize CKDS
6. Generate a Secure AES Data Key
7. Protect Data Sets with Secure Keys
8. Authorize Key Users
9. Allocate Data Sets
10. Write & Print the Encrypted Data Set

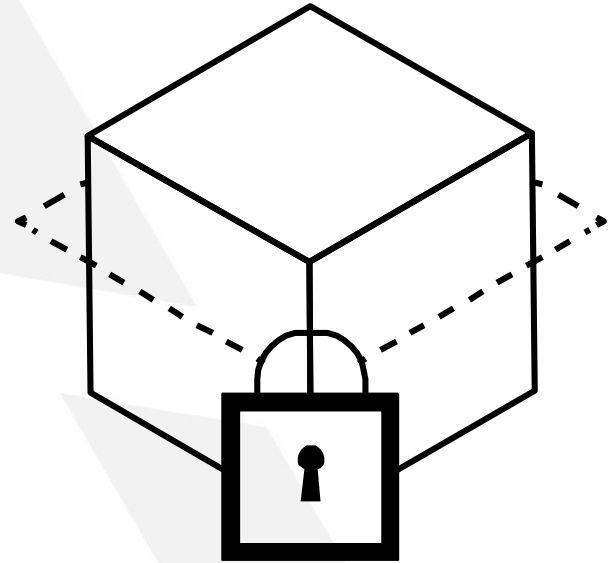


For REXX, CLIST and JCL Samples see
IBM Crypto Education: <https://ibm.biz/BdiAah>

Three Perspectives...



ICSF View



DFSMS View




RACF View

- ICSF Configuration & Auditing
- Master Key Generation & Loading
- Master Key Life Cycle
- Operational Key Generation
- Operational Key Life Cycle
- Operational Key Label Naming


- Data Set Naming Conventions
- Data Set Allocation
- Data Set Read & Write
- Data Set Management

- CSFSERV Authorization
- CSFKEYS Authorization
- FACILITY Authorization
- DATASET Authorization

Step 1: Configuring Crypto Express Cards



ICSF View



DFSMS View



RACF View

- How many Crypto Express adapter will be needed?
- Which Crypto Express adapters will be assigned to which LPARs?
- Which modes will be configured?
- Is a TKE Workstation needed?

N/A

N/A

Crypto Card Capacity Planning:

https://www.ibm.com/developerworks/community/blogs/79c1eec4-00c4-48ef-ae2b-01bd8448dd6c/entry/Crypto_Express_Card_Capacity_Planning

Change LPAR Cryptographic Controls: S24 (Active) - S24

Assigned Domains

Select	Index	Control	Control and Usage
<input type="checkbox"/>	5		✓
<input type="checkbox"/>	6	✓	
<input type="checkbox"/>	7	✓	
<input type="checkbox"/>	8	✓	
<input type="checkbox"/>	9	✓	

Assigned Cryptos

Select	Number	Candidate	Candidate and Online
<input type="checkbox"/>			
<input type="checkbox"/>			
<input type="checkbox"/>			
<input type="checkbox"/>			
<input type="checkbox"/>			

Attention: You must install the 'IBM CP Assist for Cryptographic Functions' (CPACF) feature if a cryptographic candidate is selected from the list box. Otherwise, some functions of Integrated Cryptographic Service Facility (ICSF) may fail.

Save and Change Save to Profiles Change Running System Reset Cancel Help

Configure On/Off

Select	PCHID	ID	LPAR Name	Desired State	Message
<input type="checkbox"/>	011C	00	S24	standby	
<input type="checkbox"/>	0164	01	S24	standby	
<input type="checkbox"/>	019C	02	S24	standby	
<input type="checkbox"/>	01E4	03	S24	standby	
<input type="checkbox"/>	0104	08	S24	standby	
<input type="checkbox"/>	0144	09	S24	standby	
<input type="checkbox"/>	0178	0A	S24	standby	
<input type="checkbox"/>	0278	0B	S24	standby	
<input type="checkbox"/>	0184	0C	S24	standby	
<input type="checkbox"/>	01C4	0D	S24	standby	
<input type="checkbox"/>	01F8	0E	S24	standby	

Page 1 of 1 Total: 11 Filtered: 11 Displayed: 11

OK Cancel Help


Change LPAR Cryptographic Controls - S24

Are you sure you want to change the Cryptographic Controls in the Image Profile and in the active logical partition?

ACT33684


Yes No

Step 2: Configure ICSF



ICSF View

- Which Key Data Sets (KDSs) are needed?
- Will the KDS use the Common Record Format?
- Will any KDSs be shared in a sysplex with a common Master Key?
- Should key usage auditing be enabled?
- Should key life cycle auditing be enabled?
- Should crypto usage statistics be enabled?



DFSMS View

N/A



RACF View

- Does the ICSF admin have authority to update the CSFPRMxx PARMLIB member?
- Are the CSFSERV and CSFKEYS classes ACTIVE and RACLISTed?
- Do the CSFSERV and CSFKEYS classes have a generic resource defined with UACC(NONE)?

CKDS Allocation Job

```
//*****  
//***          CREATE CKDS  
//*****  
//STEP2   EXEC PGM=IDCAMS,REGION=4M  
//SYSPRINT DD  SYSOUT=*  
//SYSIN DD *  
  DEFINE CLUSTER (NAME (EYSHA.ICSF.CSF77C1.CKDSR) -  
                  VOLUME (CSFDR7) -  
                  RECORDS (100 50) -  
                  RECSZ (332,2048) -  
                  KEYS (72 0) -  
                  FSPC (10,10) -  
                  SHR (2,3) ) -  
  DATA (NAME (EYSHA.ICSF.CSF77C1.CKDSR.DATA) -  
        BUFFERSPACE (100000) -  
        ERASE -  
        WRITECHECK) -  
  INDEX (NAME (EYSHA.ICSF.CSF77C1.CKDSR.INDEX)) )  
//*
```



CKDS

The CKDS must be in Common Record Format (i.e. LRECL = 2048) in order to perform key archival, set key validity dates, track key reference dates and add custom metadata to key records. These features require ICSF HCR77B0 or later.


z/OS data set encryption requires the use of a CKDS to store operational keys.

If you plan to share the CKDS with other LPARs, enable SYSPLEXCKDS.


ICSF Installation Options Data Set (IODS) in CSFPRMxx

```
CKDSN (EYSHA.ICSF.CSF77C1.CKDSR  
SYSPLEXCKDS (YES, FAIL (YES) )  
CHECKAUTH (NO)  
DOMAIN (0)  
SSM (YES)  
DUMPTKT (YES)  
KDSREFDAYS (1)  
STATS (ENG, SRV, ALG)  
AUDITKEYLIFECKDS (TOKEN (YES) , LABEL (YES) )  
AUDITKEYUSGCKDS (TOKEN (YES) , LABEL (YES) , INTERVAL (1) )
```

Step 3: Start ICSF



ICSF View



DFSMS View



RACF View

- Are the Crypto Express adapters correctly displayed at ICSF startup?
- Are the Key Data Sets correctly displayed at ICSF startup?
- Are the ICSF options correctly displayed at ICSF startup?

N/A


N/A

ICSF Started Task


```
//* This is the start proc for loading ICSF HCR77C1  
//CSFEPC1 PROC  
V=CSFDR7,CSFPRM='EYSHA.ICSF.Z14.ENCRYPT.STEP2.CONFIG'  
//CSFSTEP EXEC PGM=CSFINIT,REGION=0M,TIME=1440  
//CSFPARM DD DISP=SHR,DSN=&CSFPRM,VOL=SER=&V,UNIT=3390
```

```
SY1 S0000055 CSFM111I CRYPTOGRAPHIC FEATURE IS ACTIVE. CRYPTO EXPRESS5  
COPROCESSOR 5C33, SERIAL NUMBER 99EA6076.  
SY1 S0000055 CSFM100E CRYPTOGRAPHIC KEY DATA SET,  
EYSHA.ICSF.CSF77C1.CKDSR IS NOT INITIALIZED.  
SY1 S0000055 CSFM508I CRYPTOGRAPHY - THERE ARE NO CRYPTOGRAPHIC  
ACCELERATORS ONLINE.  
SY1 S0000055 CSFM015I FIPS 140 SELF CHECKS FOR PKCS11 SERVICES  
SUCCESSFUL.  
SY1 S0000055 CSFM126I CRYPTOGRAPHY - FULL CPU-BASED SERVICES ARE  
AVAILABLE.  
SY1 S0000055 CSFM001I ICSF INITIALIZATION COMPLETE  
SY1 S0000055 CSFM640I ICSF RELEASE FMID=HCR77C1.
```

Step 4: Load AES Master Key



ICSF View



DFSMS View



RACF View

- How will Master Keys be loaded? TKE, Master Key Entry panels or PPINIT?
- How many key officers will have master key parts?
- How will master key parts be securely stored for future re-entry for disaster recovery or loading new adapters?

N/A

- Does the ICSF Admin have authorization to the ICSF panels for Master Key Entry which are protected by the CSFSERV class?

How do you generate, maintain and manage Master Keys?

- Using the Trusted Key Entry (TKE) Workstation
 - Applicable for initialization of ICSF Key Data Sets (i.e. key stores) and Crypto Express adapters
 - Applicable for master key change operations
 - Required for EP11 Master Key management & PCI-HSM Master Key management
 - Separate, priced product



Trusted Key Entry (TKE) Workstation



Smart Cards



Smart Card Readers

- Using the ICSF Master Key Entry Panels
 - Applicable for initialization of ICSF Key Data Sets (i.e. key stores) and Crypto Express adapters
 - Applicable for master key change operations
 - Included with z/OS and ICSF



- Using the Pass Phrase Initialization (PPINIT) Panel
 - Applicable for initialization of ICSF Key Data Sets (i.e. key stores) and Crypto Express adapters
 - **NOT** applicable for master key change operations
 - Included with z/OS and ICSF



```
----- ICSF - Master Key Entry -----
COMMAND ==>
      AES new master key register      : EMPTY
      DES new master key register      : EMPTY
      ECC new master key register      : EMPTY
      RSA new master key register      : EMPTY

Specify information below

Key Type ==> AES-MK      (AES-MK, DES-MK, ECC-MK, RSA-MK)
Part    ==> FIRST      (RESET, FIRST, MIDDLE, FINAL)
Checksum ==> 42

Key Value ==> 24BF3F412727DA29
           ==> 17DF1B163A84E7B9
           ==> 10AD600264CA606A
           ==> 583835BF81288930

Press ENTER to process.
```

```
----- ICSF - Pass Phrase MK/CKDS/PKDS Initialization -----
COMMAND ==>
Enter your pass phrase (16 to 64 characters)
==> _____

Select one of the initialization actions then press ENTER to process.


- Initialize system - Load the AES, DES, ECC, and RSA master keys to all
coprocessors and initialize the CKDS and PKDS, making them the active key
data sets.

  KDSR format? (Y/N) ==> Y


  CKDS ==>
  PKDS ==>

- Reinitialize system - Load the AES, DES, ECC, and RSA master keys to all
coprocessors and make the specified CKDS and PKDS the active key data
sets.
  CKDS ==>
```

Step 5: Initialize CKDS



ICSF View



DFSMS View



RACF View

- Is the CKDS empty?
- Are all Master Keys parts loaded?

N/A

- Does the ICSF Admin have authorization to the ICSF panels for CKDS Initialization which is protected by the CSFSERV class?

```
----- ICSF - CKDS Operations -----
COMMAND ==> 1


Enter the number of the desired option.

1 Initialize an empty CKDS and activate master keys
2 REFRESH - Activate an updated CKDS
3 Update an existing CKDS
4 Update an existing CKDS and activate master keys
5 Refresh and activate master keys

Enter the name of the CKDS below.

CKDS ==> 'TST1.CKDS1'

Press ENTER to execute your option.
Press END to exit to the previous menu.
```



ICSF Panel 2.1.1

```
----- ICSF - CKDS Operations - INITIALIZATION COMPLETE
COMMAND ==>
Enter the number of the desired option.
Success


1 Initialize an empty CKDS and activate master keys
2 REFRESH - Activate an updated CKDS
3 Update an existing CKDS
4 Update an existing CKDS and activate master keys
5 Refresh and activate master keys

Enter the name of the CKDS below.

CKDS ==> 'TST1.CKDS1'


Press ENTER
Press END
```

MVS Console




```
SY1 S0000040 CSFM129I MASTER KEY AES ON CRYPTO EXPRESS5 COPROCESSOR 5C35,
SERIAL NUMBER 99EA6076, IS CORRECT.
SY1 S0000040 CSFM129I MASTER KEY AES ON CRYPTO EXPRESS5 COPROCESSOR 5C36,
SERIAL NUMBER 99EA6096, IS CORRECT.
SY1 S0000040 CSFM127I CRYPTOGRAPHY - AES SERVICES ARE AVAILABLE.
```

Step 6: Generate a Secure AES DATA Key



ICSF View



DFSMS View



RACF View

- What naming convention should I use for the data set keys? Will it include the generic data set resource covering the data sets?
- How long should the encryption key be active?
- What tool, utility or application will be used to generate the key?

- Will each data set have its own encryption key?
- Which data sets should be grouped and encrypted with the same key?
- Does the ICSF Admin know how many keys to generate?
- Does the ICSF Admin know the proper naming convention?

- Does the ICSF Admin have authorization to the ICSF panels and/or callable services (APIs) for key generation?

```

aes_key_label = ,
    left('DATASET.EYSHA.ICSF.ENCRYPT.ME.ENCRKEY.0000001',64);
kgn_key_form      = 'OP  ';
kgn_key_length   = 'KEYLN32  ';
kgn_key_type_1   = 'AESDATA  ';
kgn_key_type_2   = '';
kgn_kek_identifier_1 = copies('00'x,64);
kgn_kek_identifier_2 = '';
kgn_generated_key_identifier_1 = copies('00'x,64);
kgn_generated_key_identifier_2 = '';
Call CSNBKGN;

```

```

krc2_label = aes_key_label;
krc2_token_length = '00000040'x;
krc2_token = kgn_generated_key_identifier_1;
Call CSNBKRC2;

```

ICSF API

```

----- ICSF - Create ADD, UPDATE, or DELETE Key Statement -----
Specify control statement information below

```

```

Function ==> ADD      ADD, UPDATE, or DELETE
Algorithm ==> AES     DES or AES
Key Type ==> DATA    Outtype ==>      (Optional)
Label ==>
Group Labels ==> NO_  NO or YES

```

```

or Range:
Start ==> DATASET.EYSHA.ICSF.ENCRYPT.ME.ENCRKEY.0005
End   ==> DATASET.EYSHA.ICSF.ENCRYPT.ME.ENCRKEY.0010

```

```

Transport Key Label(s)
==>
==>

```

```

or Clear Key      ==> NO      NO or YES
Control Vector    ==> YES    NO or YES
Length of Key     ==>      For DES: 8, 16 or 24  For AES: 16, 24, or 32
Key Values        ==>

```

COMMAND ==>

ICSF KGUP

```

----- ICSF - CKDS Generate Key -----
COMMAND ==>

```

Active CKDS: EYSHA.ICSF.CSF77C1.CKDSR

```

Enter the CKDS record label for the new AES DATA key
==> DATASET.EYSHA.ICSF.ENCRYPT.ME.ENCRKEY.0000001

```

AES key bit length: _ 128 _ 192 s 256

ICSF CKDS KEYS Panel (HCR77C1)

Key Template Editor

Title:* DES-PLAY 1 Number: DES-PLAY-1

Version: 11 Status:* Active

Description: Template for test purposes

Key Creation Values:

Key Label: <hierarchy>TEST.<BIN>.<seqno>

Key State: Active Algorithm: DES

Key Size:* DOUBLE Key Check Method: 8: ENC-ZERO

Origins:* Generate Comment:

Active Date: Today Expiry Date: Today + 2y

Expiry Date Start: ..

Allow keys of equal left and right halves: Yes No

Assign Institution id: Yes No

Key Instances:

Application	Key Store Label	Key Zone	Key Store Type	Key Type	Install
ISSUER	Same as Key Label	I - Issuing	ICSF	OPINENC	Yes


Export Key Instances:

Export key	Export Key Label	Key Destination	Preferred Key Letter
Yes	Same as Key Label	Print	Binary / TR-31

Save Cancel


EKMF Template

Step 7: Protect Data Sets with Secure Keys



ICSF View

- Does the Security Admin have the key label names to use for the generic data set profile?



DFSMS View

- Does the Security Admin have the mapping of the key label names to the data set names to be covered by generic data set profiles?



RACF View

- Should data set encryption be limited to security admins only? Should data set owners and/or storage admins be able to add key labels at dataset allocation?
- What key labels should be assigned to which dataset profiles?
- Which users should have access to the dataset profiles? What access level?

Restrict data set encryption to security administrators using SAF profiles.



```
RDEFINE FACILITY STGADMIN.SMS.ALLOW.DATASET.ENCRYPT UACC (NONE)
SETROPTS RACLIST (FACILITY) REFRESH
```

Use generic profiles to control access to subsets of data sets.

```
ADDSD 'EYSHA.ICSF.ENCRYPT.ME.*' UACC (NONE)
ALTDSD 'EYSHA.ICSF.ENCRYPT.ME.*' +
DFP (DATAKEY (DATASET.EYSHA.ICSF.ENCRYPT.ME.ENCRKEY.00000001))
/* SETROPTS GENERIC (DATASET) REFRESH */
```

Specify a DFP segment with the DATAKEY set to the key label in the CKDS where the encryption key resides.


```
ADDUSER DATAOWN PASSWORD (change-me) TSO (ACCTNUM (123)
PROC (TST77C1))
ADDUSER STORADM PASSWORD (change-me) TSO (ACCTNUM (123)
PROC (TST77C1))

PERMIT 'EYSHA.ICSF.ENCRYPT.ME.*' ID (DATAOWN) ACCESS (UPDATE)
PERMIT 'EYSHA.ICSF.ENCRYPT.ME.*' ID (STORADM) ACCESS (ALTER)
```


Permit access to the data set as usual.



Step 8: Authorize Key Users



ICSF View



DFSMS View



RACF View

- Does the Security Admin have the key label naming conventions to grant access to data set encryption keys?

- Which users should be able to view the data set contents?

- What CSFKEYS resources should be created to protect the dataset key labels?
- Which users should have READ access to those CSFKEYS profiles?

The class that protects ICSF keys in the CKDS and PKDS


The resource protecting all key labels that match the pattern

```
RDEFINE CSFKEYS DATASET.EYSHA.ICSF.ENCRYPT.ME.* UACC (NONE)
RALTER CSFKEYS DATASET.EYSHA.ICSF.ENCRYPT.ME.* +
  ICSF (SYMCPACFWRAP (YES) SYMCPACFRET (YES) )
PERMIT DATASET.EYSHA.ICSF.ENCRYPT.ME.* CLASS (CSFKEYS) ID (DATAOWN) +
  ACCESS (READ) WHEN (CRITERIA (SMS (DSENCRIPTION) ) )
SETROPTS RACLIST (CSFKEYS) REFRESH
```


New segment that indicates the user is permit access to the key label only for data set encryption.

Fields that enable the use of protected keys and the ability to return protected keys to authorized callers such as DFSMS.

Step 9: Allocate Data Sets



ICSF View



DFSMS View



RACF View

N/A

- Do data classes exist for extended format (DSNTYPE=EXTR or EXTP)?
- Are the ACS routines modified to select these data classes for the data sets?
- Are there data classes that also have compressed format (COMPACTION=)?
- Are zEDC features installed for use with zEDC compression?

N/A

Allocate a data set using TSO Allocate or JCL.

```
ALLOCATE DATASET ('EYSHA.ICSF.ENCRYPT.ME.DATA') STORCLAS (NOSPACE)      +
      RECFM (F,B) BLOCK (80) DSNTYPE (EXTREQ) NEW

FREE DATASET ('EYSHA.ICSF.ENCRYPT.ME.DATA')
```

- **The data set to be encrypted must be:**


- SMS Managed
- Extended Format
 - Data class DSNTYPE=EXTR or EXTP
 - JCL DSNTYPE=EXTREQ or EXTPREF
- QSAM or BSAM
 - Sequential Data Sets
- VSAM or VSAM/RLS
 - KSDS, ESDS, RRDS, VRRDS, LDS
- Stored on Device Type 3390

- **The data set to be encrypted must NOT be:**


- A system data set (such as Catalogs, SHCDS, HSM data sets)
- A data set used before ICSF is started:
 - RACF database
- The ICSF Key Data Set
- Basic and Large format sequential
- PDS/PDSE
- BDAM

Data must be compressed prior to encryption!

Step 10: Write & Print Cipher Text



ICSF View



DFSMS View



RACF View

N/A

- Are authorized users able to view dataset content?
- Are unauthorized user able to manage the data set without viewing the data set?

- Are unauthorized users prevented from viewing dataset content?
- Are audit records produced showing crypto usage?
- Are audit records produced showing key usage?

Write (or copy) data to the data set


```
//UPDATE EXEC PGM=IEBDG
//SYSPRINT DD SYSOUT=*
//OUTDATA DD DSNAME=EYSHA.ICSF.ENCRYPT.ME.DATA,UNIT=3
390,
//          DISP=(OLD,KEEP),VOLUME=SER=SMSVL1,
//          DCB=(RECFM=FB,LRECL=80,BLKSIZE=80)
//SYSIN DD *
DSD OUTPUT=(OUTDATA)
FD NAME=HELLO,LENGTH=11,PICTURE=11,'hello
world'
CREATE QUANTITY=1,NAME=(HELLO)
END
```

Print the data on the track

```
//PRINT EXEC PGM=ADRDSSU
//SYSPRINT DD SYSOUT=*
//SYSIN DD *
PRINT DATASET(EYSHA.ICSF.ENCRYPT.ME.DATA)
INDYNAM(SMSVL1)
/*
```

Live Demo...

1. Configure Crypto Express Cards
2. Configure ICSF
3. Start ICSF
4. Load AES MK
5. Initialize CKDS
6. Generate a Secure AES Data Key
7. Protect Data Sets with Secure Keys
8. Authorize Key Users
9. Allocate Data Sets
10. Write & Print the Encrypted Data Set

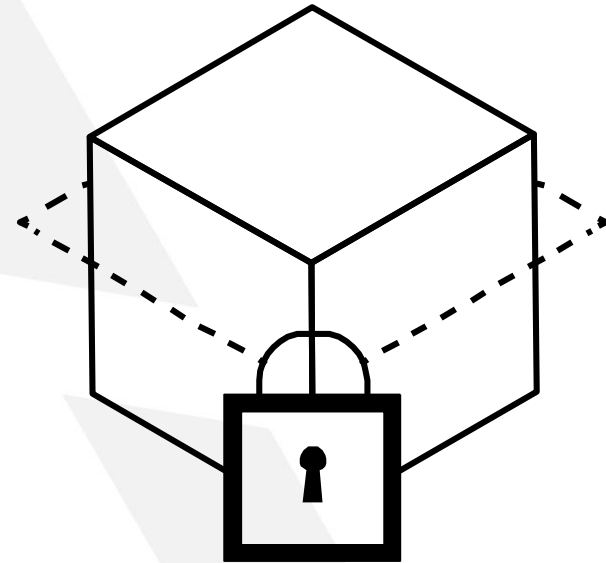

For REXX, CLIST and JCL Samples see
IBM Crypto Education: <https://ibm.biz/BdiAah>

Additional Resources

IBM Crypto Education Community


<https://www.ibm.com/developerworks/community/groups/community/crypto>

Getting Started with z/OS Data Set Encryption Redbook


<http://www.redbooks.ibm.com/redpieces/abstracts/sg248410.html?Open>



Questions?



ICSF View



DFSMS View



RACF View

Don't miss
Thursday's Farewell
Reception!

The Race to
15,000!

PERSO
N

PROGRA
M

PROJECT

Be a part of the...

HOOPLA!



Complete your session
evaluations at
www.share.org/evaluation
and see your progress on the
leaderboard!